

AC/DC Medical Power Supply

TPP 65E-J Series, 65 Watt

- Compact encapsulated 65 Watt Chassis mount module (4.3"x2.2")
- I/O isolation 4000 VAC rated for 250 VAC working voltage
- Certification according to IEC/EN/ES 60601-1 3rd edition for 2 x MOPP
- Risk management process according to ISO 14971 incl. risk management file
- Acceptance criteria for electronic assemblies acc. to IPC-A-610 Level 3
- Low leakage current <100 µA rated for BF applications
- Operating temperature -40°C to 80°C
- EMC compliance according to IEC 60601-1-2 4th edition and EN55032 class B
- Operating up to 5000m altitude
- 5-year product warranty



The TPP 65E-J is a 65 Watt encapsulated AC/DC modules in a Chassis mount package. It features a reinforced double I/O isolation system according to latest medical safety standards (60601-1 3rd edition, 2 x MOPP). The leakage current is below 100 µA and makes the module suitable for BF (body floating) applications. The excellent efficiency of up to 93% allows a high power density and compact design (4.3" x 2.2"). The operating temperature range is -40°C to +80°C with derating above 60°C. The EMC characteristic is dedicated for applications in industrial and medical fields. High reliability is provided by use of high quality components and an excellent thermal management making the TPP 65E-J an ideal solution for medical devices and for demanding safety and space critical applications.

Models				
Order Code	Output Power max.	Output Voltage nom. (adjustable)	Output Current max.	Efficiency typ.
TPP 65-105E-J	50 W	5 VDC (4.5 - 5.5 VDC)	10'000 mA	90 %
TPP 65-112E-J	65 W	12 VDC (10.8 - 13.2 VDC)	5'420 mA	93 %
TPP 65-115E-J		15 VDC (13.5 - 16.5 VDC)	4'340 mA	94 %
TPP 65-124E-J		24 VDC (21.6 - 26.4 VDC)	2'710 mA	94 %
TPP 65-136E-J		36 VDC (32.4 - 39.6 VDC)	1'810 mA	93 %
TPP 65-148E-J		48 VDC (43.2 - 52.8 VDC)	1'360 mA	93 %

Input Specifications

Input Voltage	- AC Range	Operational Range: 85 - 264 VAC (Full Range)
	- DC Range	Rated Range: 100 - 240 VAC (Full Range)
		Operational Range: 120 - 370 VDC (Designed for, no certification)
		Polarity: +DC: L / -DC: N
Input Frequency		47 - 63 Hz
Input Current	- Full Load & $V_{in} = 230$ VAC	900 mA max.
	- Full Load & $V_{in} = 115$ VAC	1'500 mA max.
Power Consumption	- At no load	110 mW typ. (Ready to meet ErP directive)
Input Inrush Current	- At 230 VAC	80 A max.
	- At 115 VAC	30 A max.
Input Protection		T 3.15 A / 250 VAC (Internal Fuse L & N)
Recommended Input Fuse		3'150 mA (slow blow) (The need of an external fuse has to be assessed in the final application.)

Output Specifications

Output Voltage Adjustment		±10% (By external trim resistor)
		See application note: www.tracopower.com/overview/tpp65e-j Output power must not exceed rated power!
Voltage Set Accuracy		±1% max.
Regulation	- Input Variation ($V_{min} - V_{max}$)	0.2% max.
	- Load Variation (0 - 100%)	0.5% max.
Ripple and Noise (20 MHz Bandwidth)	5 VDC model:	100 mVp-p max. (w/ 10 μ F)
	12 VDC model:	100 mVp-p max. (w/ 10 μ F)
	15 VDC model:	100 mVp-p max. (w/ 10 μ F)
	24 VDC model:	120 mVp-p max. (w/ 1 μ F)
	36 VDC model:	120 mVp-p max. (w/ 1 μ F)
	48 VDC model:	200 mVp-p max. (w/ 0.1 μ F)
	5 VDC model:	75 mVp-p typ. (w/ 10 μ F)
	12 VDC model:	75 mVp-p typ. (w/ 10 μ F)
	15 VDC model:	75 mVp-p typ. (w/ 10 μ F)
	24 VDC model:	75 mVp-p typ. (w/ 1 μ F)
	36 VDC model:	75 mVp-p typ. (w/ 1 μ F)
	48 VDC model:	150 mVp-p typ. (w/ 0.1 μ F)
	5 VDC model:	20'000 μF max.
	12 VDC model:	4'520 μF max.
	15 VDC model:	2'900 μF max.
	24 VDC model:	1'130 μF max.
Capacitive Load	36 VDC model:	520 μF max.
	48 VDC model:	285 μF max.
	Minimum Load	Not required
	Temperature Coefficient	±0.02 %/K max.
	Hold-up Time	75 ms min.
Start-up Time	- At 230 VAC	1'000 ms max.
	- At 115 VAC	1'000 ms max.
Short Circuit Protection		Continuous, Automatic recovery
Output Current Limitation		120 - 180% of I_{out} max.
		145% typ. of I_{out} max.
Overvoltage Protection		130% typ. of V_{out} nom.
		125 - 140% of V_{out} nom.
Transient Response	- Response Deviation	3% max. (50% to 75% Load Step at 2.5 A/ μ s)
	- Response Time	600 μs typ. (50% to 75% Load Step at 2.5 A/ μ s)

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Safety Specifications

Safety Standards	- IT / Multimedia Equipment	EN 62368-1 IEC 62368-1 UL 62368-1
	- Medical Equipment	EN 60601-1 IEC 60601-1 ANSI/AAMI ES 60601-1
	- Certification Documents	2 x MOPP (Means Of Patient Protection) www.tracopower.com/overview/tpp65e-j
Protection Class		Class I & II (Prepared): Reinforced Insulation
Pollution Degree		PD 2
Over Voltage Category		OVC II

EMC Specifications

EMI Emissions	- Conducted Emissions	EN 55011 class B (internal filter) EN 55032 class B (internal filter) FCC Part 15 class B (internal filter) FCC Part 18 class B (internal filter)
	- Radiated Emissions	EN 55011 class B (internal filter) EN 55032 class B (internal filter) FCC Part 15 class B (internal filter) FCC Part 18 class B (internal filter)
	- Harmonic Current Emissions	EN 61000-3-2, class A
	- Voltage Fluctuations & Flicker	EN 61000-3-3
EMS Immunity	- Electrostatic Discharge	EN 60601-1-2 edition 4 (Medical Devices) Air: EN 61000-4-2, ± 15 kV, perf. criteria A Contact: EN 61000-4-2, ± 8 kV, perf. criteria A
	- RF Electromagnetic Field	EN 61000-4-3, 20 V/m, perf. criteria A
	- EFT (Burst) / Surge	EN 61000-4-4, ± 2 kV, perf. criteria A
		L to L: EN 61000-4-5, ± 1 kV, perf. criteria A
	- Conducted RF Disturbances	EN 61000-4-6, 20 Vrms, perf. criteria A
	- PF Magnetic Field	Continuous: EN 61000-4-8, 30 A/m, perf. criteria A
	- Voltage Dips & Interruptions	230 VAC / 50 Hz: EN 61000-4-11 30%, 25 periods, perf. criteria A >95%, 0.5 periods, perf. criteria A >95%, 1 period, perf. criteria A >95%, 250 periods, perf. criteria B
		115 VAC / 60 Hz: EN 61000-4-11 30%, 25 periods, perf. criteria A >95%, 0.5 periods, perf. criteria A >95%, 1 period, perf. criteria A >95%, 250 periods, perf. criteria B

General Specifications

Relative Humidity		95% max. (non condensing)
Temperature Ranges	- Operating Temperature	-40°C to +85°C
	- Storage Temperature	-40°C to +85°C
Power Derating	- High Temperature	See application note: www.tracopower.com/overview/tpp65e-j
	- Low Input Voltage	See application note: www.tracopower.com/overview/tpp65e-j
Cooling System		Natural convection (20 LFM)
Altitude During Operation		5'000 m max.
Switching Frequency		50 - 130 kHz (PWM QR)
Insulation System		Reinforced Insulation
Working Voltage (rated)		250 VAC
Isolation Test Voltage	- Input to Output, 60 s	4'000 VAC
	- Input to Case or PE, 60 s	2'500 VAC
	- Output to Case or PE, 60 s	2'500 VAC

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Creepage	- Input to Output	8 mm min.
	- Input to Case or PE	4 mm min.
	- Output to Case or PE	4 mm min.
Clearance	- Input to Output	4 mm min.
	- Input to Case or PE	4 mm min.
	- Output to Case or PE	4 mm min.
Isolation Resistance	- Input to Output, 500 VDC	100 MΩ min.
Isolation Capacitance	- Input to Output, 100 kHz, 1 V	1'250 pF typ. / 1'500 pF max.
Leakage Current	- Touch Current	100 μA max.
Reliability	- Calculated MTBF	1'494'000 h (MIL-HDBK-217F, ground benign)
Environment	- Vibration	IEC 60068-2-6 5 g, 3 axis, sine sweep, 3x30 min, 5-500 Hz
	- Mechanical Shock	IEC 60068-2-27 50 g, 3 axis, 11 ms
	- Thermal Shock	MIL-STD-810F -40 to +85°C, 72 cycles, 30 min each
Housing Material		Plastic (UL 94 V-0 rated)
Potting Material		Silicone (UL 94 V-0 rated)
Housing Type		Plastic Case
Mounting Type		Chassis Mount
Connection Type		Pin Connector
Weight		295 g
Environmental Compliance	- REACH Declaration	www.tracopower.com/info/reach-declaration.pdf REACH SVHC list compliant REACH Annex XVII compliant
	- RoHS Declaration	www.tracopower.com/info/rohs-declaration.pdf Exemptions: 7a, 7c-I (RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule). The SCIP number is provided on request.)


Supporting Documents

Overview Link (for additional Documents)

www.tracopower.com/overview/tpp65e-j

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Outline Dimensions

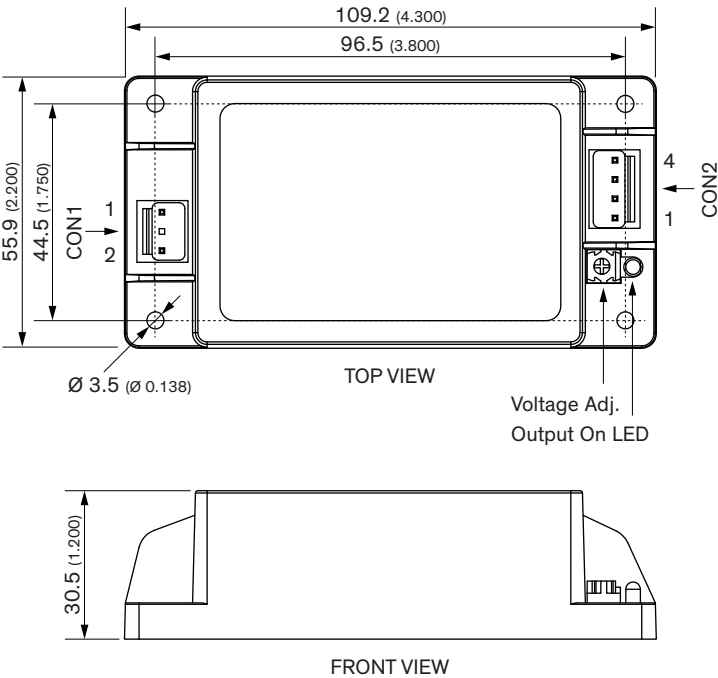

Dimensions in mm (inch)
Tolerances: x.x ±0.5 (x.xx ±0.02)
 x.xx ±0.25 (x.xxx ±0.010)

Pin connectors			
Input (CON1)		Output (CON2)	
Pin	Function	Pin	Function
1	Line	1, 2	–Vout
2	Neutral	3, 4	+Vout

NC: Not connected

Input: JST series
mates with JST crimp terminal: SVH-21T-P1.1
and terminal housing: VHR-3N

Output: JST series
mates with JST crimp terminal: SVH-21T-P1.1
and terminal housing: VHR-4N