

DC/DC Medical Converter

TRV 1M Series, 1 Watt

- I/O isolation 5000 VAC (reinforced)
- Short circuit protection
- Semi-regulated outputs
- Input voltage ranges ($\pm 10\%$):
5, 12, 15, 24 VDC
- Operating temperature range
-40 to +85 °C without derating
- Certification according to IEC/EN/ES
60601-1 3rd edition for 2xMOPP and
IEC/EN/UL 62368-1
- Low leakage current $< 2 \mu\text{A}$
- Efficiency up to 85%
- Operation up to 5000 m altitude
- 5-year product warranty



ES 60601-1 IEC 60601-1
UL 62368-1 IEC 62368-1

The TRV 1M is a series of 1 Watt DC/DC converters in a compact SIP-9 package with reinforced isolation of 5000 VAC for medical and industrial applications. The series offers models with different input voltages ($\pm 10\%$) between 5 and 24 VDC. With a continuous short circuit protection and a low leakage current of less than $2 \mu\text{A}$, this converter series is especially suited to protect any connected interfaces or applied parts to patients. Featuring semi-regulated outputs this series provides a good level of regulation without affecting the cost efficiency. It is an ideal solution for applications where a completely unregulated DC/DC converter would not meet your regulation requirements and therefore opens up the overall application range of this series. Together with an operating temperature range from -40 to +85°C without derating and certifications according to IEC/EN/ES 60601-1 3rd ed. for 2xMOPP and IEC/EN/UL 62368-1 this series is suitable for many different applications where a medical isolation system and short circuit protection is needed.

Models

Order Code	Input Voltage Range	Output 1		Output 2		Efficiency typ.
		Vnom	I _{max}	Vnom	I _{max}	
TRV 1-0510M	4.5 - 5.5 VDC (5 VDC nom.)	3.3 VDC	303 mA			80 %
TRV 1-0511M		5 VDC	200 mA			82 %
TRV 1-0512M		12 VDC	83 mA			85 %
TRV 1-0513M		15 VDC	67 mA			84 %
TRV 1-0521M		+5 VDC	100 mA	-5 VDC	100 mA	85 %
TRV 1-0522M		+12 VDC	42 mA	-12 VDC	42 mA	85 %
TRV 1-0523M		+15 VDC	34 mA	-15 VDC	34 mA	84 %
TRV 1-1210M	9.6 - 14.4 VDC (12 VDC nom.)	3.3 VDC	303 mA			80 %
TRV 1-1211M		5 VDC	200 mA			82 %
TRV 1-1212M		12 VDC	83 mA			84 %
TRV 1-1213M		15 VDC	67 mA			83 %
TRV 1-1221M		+5 VDC	100 mA	-5 VDC	100 mA	82 %
TRV 1-1222M		+12 VDC	42 mA	-12 VDC	42 mA	83 %
TRV 1-1223M		+15 VDC	34 mA	-15 VDC	34 mA	83 %
TRV 1-1510M	12 - 18 VDC (15 VDC nom.)	3.3 VDC	303 mA			79 %
TRV 1-1511M		5 VDC	200 mA			83 %
TRV 1-1512M		12 VDC	83 mA			84 %
TRV 1-1513M		15 VDC	67 mA			84 %
TRV 1-1521M		+5 VDC	100 mA	-5 VDC	100 mA	82 %
TRV 1-1522M		+12 VDC	42 mA	-12 VDC	42 mA	83 %
TRV 1-1523M		+15 VDC	34 mA	-15 VDC	34 mA	83 %
TRV 1-2410M	19.2 - 28.8 VDC (24 VDC nom.)	3.3 VDC	303 mA			78 %
TRV 1-2411M		5 VDC	200 mA			82 %
TRV 1-2412M		12 VDC	83 mA			83 %
TRV 1-2413M		15 VDC	67 mA			83 %
TRV 1-2421M		+5 VDC	100 mA	-5 VDC	100 mA	80 %
TRV 1-2422M		+12 VDC	42 mA	-12 VDC	42 mA	81 %
TRV 1-2423M		+15 VDC	34 mA	-15 VDC	34 mA	81 %

Note - 5 Vin models: If the input will be switched electromechanically, use an external 100 $\mu\text{F}/10 \text{ V E/C.}$ to avoid voltage transient.

Input Specifications

Input Current	- At no load	5 Vin models:	30 mA typ.
		12 Vin models:	30 mA typ.
		15 Vin models:	15 mA typ.
		24 Vin models:	10 mA typ.
Surge Voltage		5 Vin models:	6 VDC max. (1 s max.)
		12 Vin models:	25 VDC max. (1 s max.)
		15 Vin models:	25 VDC max. (1 s max.)
		24 Vin models:	40 VDC max. (1 s max.)
Recommended Input Fuse		5 Vin models:	500 mA (slow blow)
		12 Vin models:	315 mA (slow blow)
		15 Vin models:	315 mA (slow blow)
		24 Vin models:	160 mA (slow blow)
		(The need of an external fuse has to be assessed in the final application.)	

Output Specifications

Voltage Set Accuracy			±3.5% max. (60% load: 3.3, 5, ±5 Vout models) ±3.5% max. (90% load: other models)
Regulation	- Input Variation (1% Vin step)	single output models:	0.2% max.
		dual output models:	0.2% max.
	- Load Variation (10 - 100%)	single output models:	10% max. (3.3, 5 Vout models) 7% max. (other models)
		dual output models:	7% max. (Output 1) 7% max. (Output 2) (10% max. for ±5 Vout model)
	- Cross Regulation (25% / 100% asym. load)	dual output models:	6% max.
Ripple and Noise	- 20 MHz Bandwidth		75 mVp-p typ. 100 mVp-p max.
Capacitive Load	- single output	3.3 Vout models:	2'000 µF max.
		5 Vout models:	820 µF max.
		12 Vout models:	470 µF max.
		15 Vout models:	470 µF max.
	- dual output	5 / -5 Vout models:	470 / 470 µF max.
		12 / -12 Vout models:	220 / 220 µF max.
		15 / -15 Vout models:	220 / 220 µF max.
Minimum Load			Not required
Temperature Coefficient			±0.03 %/K max.
Short Circuit Protection			Continuous, Automatic recovery

Safety Specifications

Safety Standards	- IT / Multimedia Equipment	EN 62368-1
		IEC 62368-1
		UL 62368-1
	- Medical Equipment	EN 60601-1
		IEC 60601-1
		ANSI/AAMI ES 60601-1
	- Certification Documents	2 x MOPP (Means Of Patient Protection)
		www.tracopower.com/overview/trv1m

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

EMC Specifications

EMI Emissions

- Conducted Emissions

EN 60601-1-2 edition 4 (Medical Devices)

EN 55011 class A (with external filter)

EN 55011 class B (with external filter)

EN 55032 class A (with external filter)

EN 55032 class B (with external filter)

- Radiated Emissions

EN 55011 class A (with external filter)

EN 55011 class B (with external filter)

EN 55032 class A (with external filter)

EN 55032 class B (with external filter)

External filter proposal: www.tracopower.com/overview/trv1m

EMS Immunity

- Electrostatic Discharge

Air: EN 60601-1-2 edition 4 (Medical Devices)

Contact: EN 61000-4-2, ± 15 kV, perf. criteria A

- RF Electromagnetic Field

EN 61000-4-3, 10 V/m, perf. criteria A

- EFT (Burst) / Surge

EN 61000-4-4, ± 2 kV, perf. criteria A

EN 61000-4-5, ± 2 kV, perf. criteria A

External filter proposal: www.tracopower.com/overview/trv1m

- Conducted RF Disturbances

EN 61000-4-6, 10 Vrms, perf. criteria A

- PF Magnetic Field

Continuous: EN 61000-4-8, 100 A/m, perf. criteria A

1 s: EN 61000-4-8, 1000 A/m, perf. criteria A

General Specifications

Relative Humidity

95% max. (non condensing)

Temperature Ranges

- Operating Temperature

-40°C to +85°C (without derating)

- Case Temperature

+105°C max.

- Storage Temperature

-55°C to +125°C

Cooling System

Natural convection (20 LFM)

Altitude During Operation

5'000 m max.

Switching Frequency

220 - 380 kHz (PWM)

Insulation System

Reinforced Insulation

Working Voltage (rated)

250 VAC

Isolation Test Voltage

- Input to Output, 60 s

5'000 VAC

Creepage

- Input to Output

8 mm min.

Clearance

- Input to Output

8 mm min.

Isolation Resistance

- Input to Output, 500 VDC

10'000 M Ω min.

Isolation Capacitance

- Input to Output, 100 kHz, 1 V

15 pF typ.

20 pF max.

Leakage Current

- Touch Current

2 μ A max.

Reliability

- Calculated MTBF

19'360'000 h (MIL-HDBK-217F, ground benign)

Washing Process

Allowed (hermetical product)

See Cleaning Guideline: www.tracopower.com/info/cleaning.pdf

Environment

- Vibration

MIL-STD-810F

- Mechanical Shock

MIL-STD-810F

- Thermal Shock

MIL-STD-810F

Housing Material

Non-conductive Plastic (UL 94 V-0 rated)

Potting Material

Silicone (UL 94 V-0 rated)

Pin Material

Brass

Pin Foundation Plating

Nickel (1 - 2 μ m)

Pin Surface Plating

Tin (3 - 5 μ m), matte

Housing Type

Plastic Case

Mounting Type

PCB Mount

Connection Type

THD (Through-Hole Device)

Footprint Type

SIP9

Weight

4.8 g

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Environmental Compliance - REACH Declaration

- RoHS Declaration

www.tracopower.com/info/reach-declaration.pdf

REACH SVHC list compliant

REACH Annex XVII compliant

www.tracopower.com/info/rohs-declaration.pdf

Exemptions: 7a, 7c-I


(RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule).
The SCIP number is provided on request.)

Supporting Documents

[Overview Link](#) (for additional Documents)

www.tracopower.com/overview/trv1m

Outline Dimensions

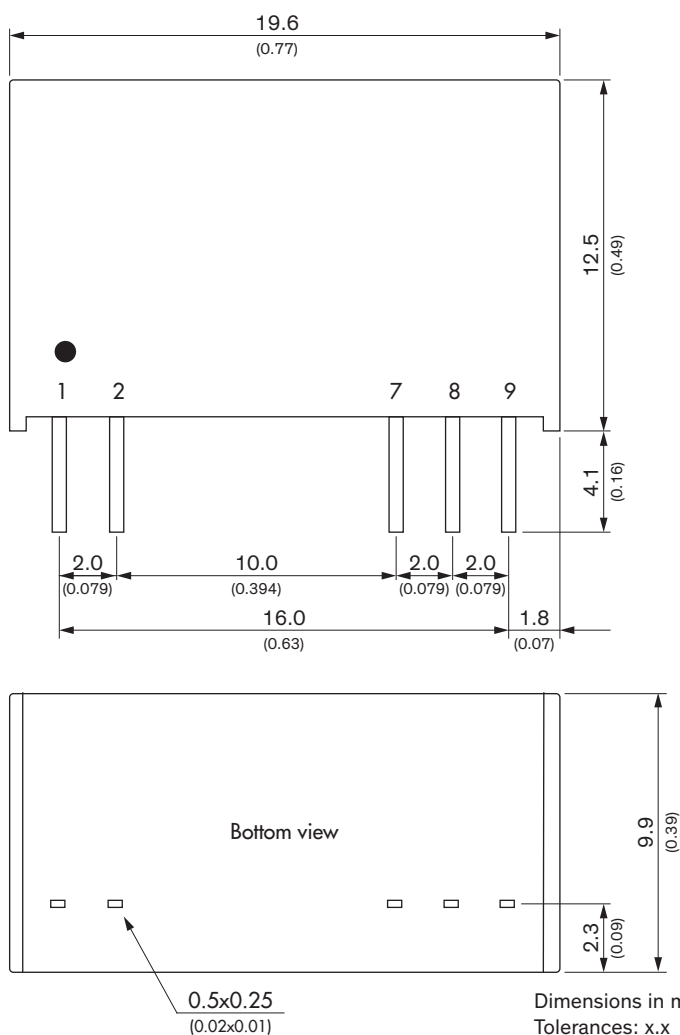

Pinout

Pin	Single	Dual
1	+Vin (Vcc)	+Vin (Vcc)
2	-Vin (GND)	-Vin (GND)
7	-Vout	-Vout
8	No Pin	Common
9	+Vout	+Vout