

A232

Part Number



Technical Data

Electrical Data

Supply Voltage 10...30 V DC

Current Consumption (Ub = 24 V) < 20 mA

Reverse Polarity Protection yes

Interface RS-232

Mechanical Data

Degree of Protection IP65

Temperature Range -25...60 °C

Housing Material Plastic

Scope of delivery Connection cables


Packaging unit 1 Piece

Suitable Connection Equipment No. **2**

- Connection cable SUB D, 9-pin included in delivery

Complementary Products

Connection Box for USB Interface AB-USB01

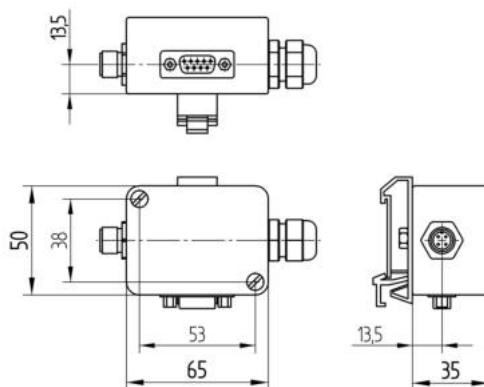

All dimensions in mm (1 mm = 0.03937 Inch)

