

# B50M001


Part Number

weQube



- Image processing functions
- MultiCore technology
- OCR reading
- Pattern matching
- Reading of printed and directly marked 1D and 2D codes

The smart camera weQube is based on the wenglor MultiCore technology and combines the function of the scanner and the vision sensors. Therefore, this product allows to capture all established 1D codes and various 2D code types. Autofocus, region of interest and tracking ensure reliable and stable image recording. The following image processing modules are available: Dimensional accuracy check, sorting procedures, presence control, object counting, position output, pixel counting, optical character recognition, pattern matching, filter options, and statistics evaluation.

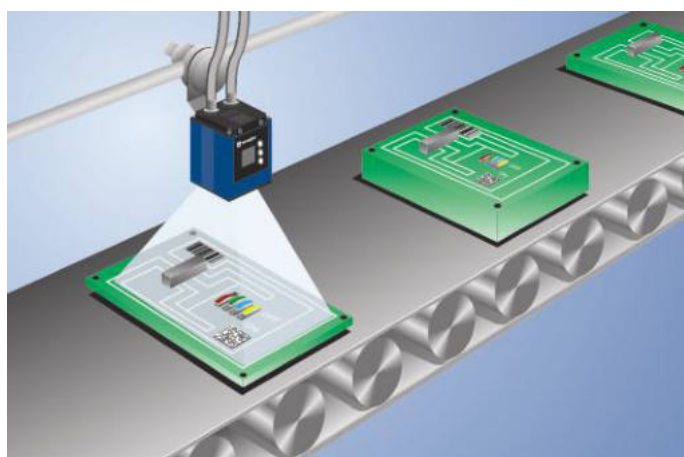

## Technical Data

### Optical Data

|                           |                 |
|---------------------------|-----------------|
| Working Range             | ≥ 20 mm         |
| Resolution                | 736 × 480 Pixel |
| Image Chip                | color           |
| Light Source              | White Light     |
| Service Life (T = +25 °C) | 100000 h        |
| Visual Field              | see Table 1     |
| Frame Rate                | 15 Hz           |

### Electrical Data

|                                    |                 |
|------------------------------------|-----------------|
| Supply Voltage                     | 18...30 V DC    |
| Current Consumption (Ub = 24 V)    | < 200 mA        |
| Response Time                      | 66 ms           |
| Temperature Range                  | -25...55 °C*    |
| Inputs/Outputs                     | 6               |
| Switching Output Voltage Drop      | < 2,5 V         |
| Switching Output/Switching Current | 100 mA          |
| Short Circuit Protection           | yes             |
| Reverse Polarity Protection        | yes             |
| Interface                          | RS-232/Ethernet |
| Protection Class                   | III             |

### Mechanical Data

|                             |                        |
|-----------------------------|------------------------|
| Setting Method              | Ethernet               |
| Housing Material            | Aluminum               |
| Degree of Protection        | IP67                   |
| Connection                  | M12 × 1; 12-pin        |
| Type of Connection Ethernet | M12 × 1; 8-pin, X-cod. |

### Safety-relevant Data

|                        |         |
|------------------------|---------|
| MTTFd (EN ISO 13849-1) | 227,7 a |
|------------------------|---------|

### Function

|                            |     |
|----------------------------|-----|
| Presence Check             | yes |
| Pixel Comparison           | yes |
| Reference Image Comparison | yes |
| Tracking                   | yes |
| OCR                        | yes |
| Object detection           | yes |
| Dimensional accuracy check | yes |
| 1D and 2D code reading     | yes |
| Pattern matching           | yes |

|                                   |     |
|-----------------------------------|-----|
| Web server                        | yes |
| Configurable as PNP/NPN/Push-Pull | ●   |
| Switchable to NC/NO               | ●   |
| Illumination Output               | ●   |
| RS-232 Interface                  | ●   |
| Ethernet                          | ●   |

|                                   |            |
|-----------------------------------|------------|
| Connection Diagram No.            | 002   1008 |
| Control Panel No.                 | X2         |
| Suitable Connection Equipment No. | 50   87    |
| Suitable Mounting Technology No.  | 560        |


Display brightness may decrease with age. This does not result in any impairment of the sensor function.

\* -25 °C: Ambient conditions should not result in condensation; avoid the formation of ice on the front panel!

55 °C: Continuous illumination at max. 1% or flash mode at 100% brightness with an exposure time of ≤ 5 ms; may affect the service life of the product.


## Complementary Products

|                                       |
|---------------------------------------|
| Disk with Polarization Filter ZNNG004 |
| Illumination Technology               |
| Protective Housing ZNNS001, ZNNS002   |
| Software                              |


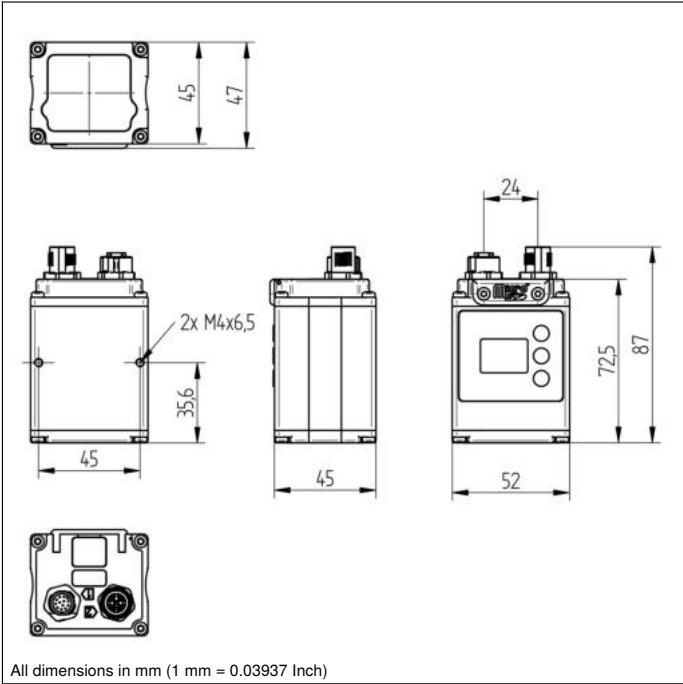


All dimensions in mm (1 mm = 0.03937 Inch)

### Ctrl. Panel



20 = Enter Button  
22 = UP Button  
23 = Down Button  
60 = Display

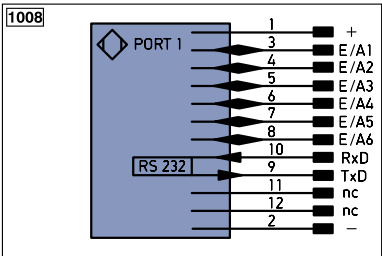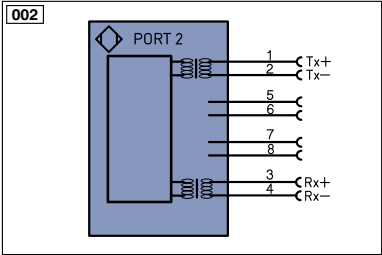

### Legend

|           |                                            |       |                                |                                    |                     |
|-----------|--------------------------------------------|-------|--------------------------------|------------------------------------|---------------------|
| +         | Supply Voltage +                           | PT    | Platinum measuring resistor    | ENAR5422                           | Encoder A/Ā (TTL)   |
| -         | Supply Voltage 0 V                         | nc    | not connected                  | ENB5422                            | Encoder B/B̄ (TTL)  |
| ~         | Supply Voltage (AC Voltage)                | U     | Test Input                     | ENa                                | Encoder A           |
| A         | Switching Output (NO)                      | Ū     | Test Input inverted            | ENb                                | Encoder B           |
| Ā         | Switching Output (NC)                      | W     | Trigger Input                  | AMIN                               | Digital output MIN  |
| V         | Contamination/Error Output (NO)            | W-    | Ground for the Trigger Input   | AMAX                               | Digital output MAX  |
| Ū         | Contamination/Error Output (NC)            | O     | Analog Output                  | AOK                                | Digital output OK   |
| E         | Input (analog or digital)                  | O-    | Ground for the Analog Output   | SY In                              | Synchronization In  |
| T         | Teach Input                                | BZ    | Block Discharge                | SY OUT                             | Synchronization OUT |
| Z         | Time Delay (activation)                    | AMV   | Valve Output                   | OLt                                | Brightness output   |
| S         | Shielding                                  | a     | Valve Control Output +         | M                                  | Maintenance         |
| RxD       | Interface Receive Path                     | b     | Valve Control Output 0 V       | rsv                                | reserved            |
| TxD       | Interface Send Path                        | SY    | Synchronization                | Wire Colors according to IEC 60757 |                     |
| RDY       | Ready                                      | SY-   | Ground for the Synchronization | BK                                 | Black               |
| GND       | Ground                                     | E+    | Receiver-Line                  | BN                                 | Brown               |
| CL        | Clock                                      | S+    | Emitter-Line                   | RD                                 | Red                 |
| E/A       | Output/Input programmable                  | ±     | Grounding                      | OG                                 | Orange              |
| IO-Link   | IO-Link                                    | SnR   | Switching Distance Reduction   | YE                                 | Yellow              |
| PoE       | Power over Ethernet                        | Rx+/- | Ethernet Receive Path          | GN                                 | Green               |
| IN        | Safety Input                               | Tx+/- | Ethernet Send Path             | BU                                 | Blue                |
| OSSD      | Safety Output                              | Bus   | Interfaces-Bus A(+)/B(-)       | VT                                 | Violet              |
| Signal    | Signal Output                              | La    | Emitted Light disengageable    | GY                                 | Grey                |
| BL-D+/-   | Ethernet Gigabit bidirect. data line (A-D) | Mag   | Magnet activation              | WH                                 | White               |
| EN0 r5422 | Encoder 0-pulse 0-0 (TTL)                  | RES   | Input confirmation             | PK                                 | Pink                |
|           |                                            | EDM   | Contacting Monitoring          | GNYE                               | Green/Yellow        |

**Table 1**

| Working Distance | 20 mm      | 100 mm     | 200 mm      |
|------------------|------------|------------|-------------|
| Visual Field     | 24 x 16 mm | 74 x 48 mm | 145 x 94 mm |

