

Barcode Raster Scanner

FIS-0003-0105

LASER

Part Number




- Adjustable scanning width
- Diagnosis functions
- Min. readable barcode density: 0,084 mm
- Teach-in

This barcode scanner is suitable for reading very high density barcodes. An auto-calibration mode can be started with the teach-in key. The scanner automatically adapts the barcode type, the sample rate and the scanning width to the respective application in this operating mode. Thanks to its compact design, the scanner requires only minimal installation space.

Readable code types:

Code39, Code93, Code128, Codabar, Interleaved 2 of 5, Pharmacode, UPC/EAN.

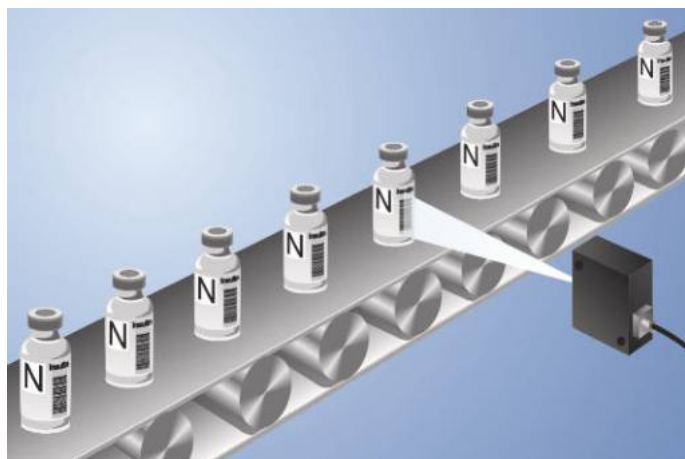

Technical Data

Optical Data

Barcode Density	Low density
Deflection Angle	3 °
Number of Raster Scan Lines	7
Read Range	51...254 mm
Light Source	Laser (red)
Wavelength	650 nm
Service Life (T = +25 °C)	40000 h
Laser Class (EN 60825-1)	2
Max. Ambient Light	8600 Lux
Opening Angle	70 °
Barcode Printing Contrast	> 25 %

Electrical Data

Supply Voltage	5 V DC
Power Consumption	1300 mW
Scan Rate	350...1000 scans/sec
On-/Off-Delay (RS-232)	0...65 s
Temperature Range	0...50 °C
Switching Output	TTL
Number of Switching Outputs	3
Switching Output/Switching Current	2 mA
Network Possibilities	Daisy Chain, Multidrop
Interface	RS-232/422/485
Baud Rate	115200 Bd
Trigger Input	NPN
Signal Input	NPN
Number of Signal Inputs	1
Acoustic signal	yes
FDA Accession Number	9921562-003

Mechanical Data

Housing Material	Metal
Weight	57 g
Degree of Protection	IP54
Connection	SubD 15-pin
Cable Length	90 cm

TTL positive/negative switchable

Connection Table No.

09

Control Panel No.

Ba6

Suitable Connection Equipment No.

16 | 74

Suitable Mounting Technology No.

430


Complementary Products

Connection Box AB-0003-1

Fieldbus Gateway ZAGxxxN01, EPGG001


Protective Housing ZSV-0x-01

Software


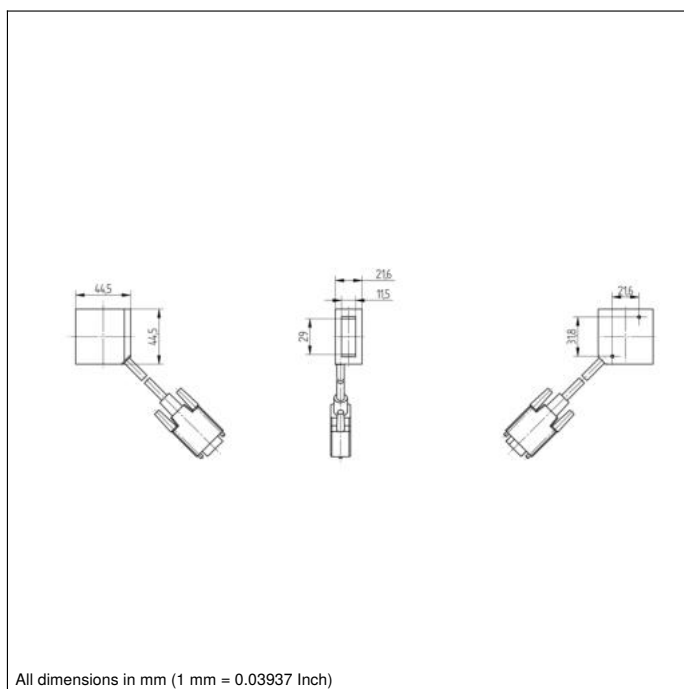


All dimensions in mm (1 mm = 0.03937 Inch)

Ctrl. Panel



- 04 = Function Indicator
- 06 = Teach Button
- 42 = Reading Performance 100 %/Good Read
- 43 = Reading Performance 80 %/Status/Trigger
- 44 = Reading Performance 60 %
- 45 = Reading Performance 40 %
- 46 = Reading Performance 20 %

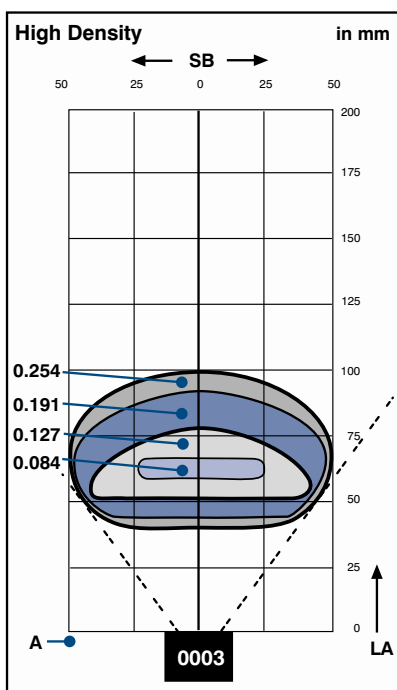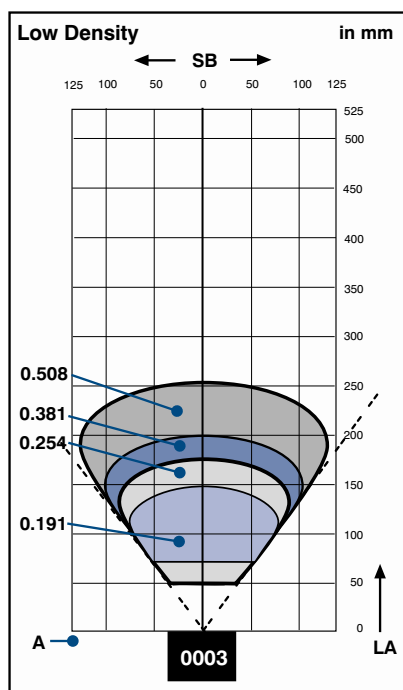

A = Resolution SB = Scan Width LA = Read Range

