


Temperature Sensor


FXDD004

Part Number

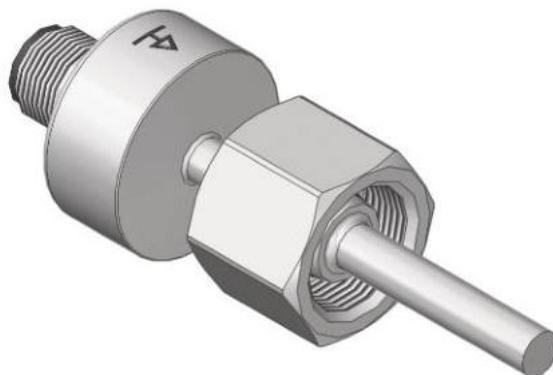

- **FDA compliant**
- **Response time T90: < 2 seconds**
- **Robust stainless steel housing with IP69K**
- **Temperature measuring range: -50 ... +200° C**

weFlux² Temperature Sensors ensure precise temperature measurement of liquids and gases in closed piping systems. It's easy to incorporate the standardized PT100/PT1000 resistance value into the controller. The compact housing with a diameter of just 27 mm is made of V4A stainless steel and features an easy-to-clean surface. Thanks to their rugged housing and functional design, the Temperature Sensors are FDA compliant.

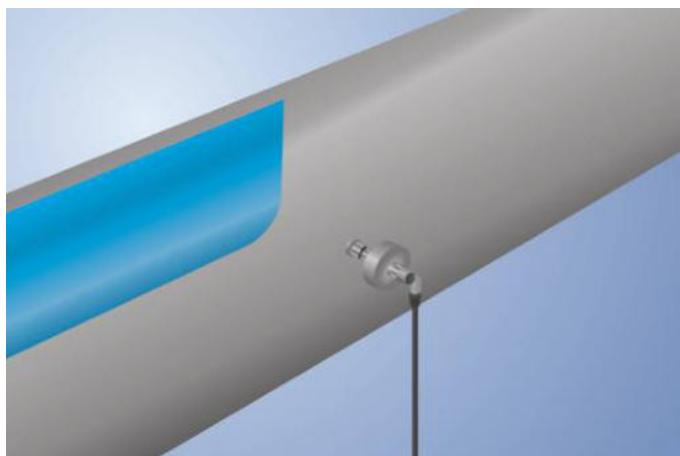

Technical Data

Sensor-specific data

| | |
|-------------------------------|----------------|
| Sensor element | PT100, Class B |
| Temperature Measurement Range | -50...200 °C |
| Medium | Liquids, gases |
| Response Time | < 2 s |

Environmental conditions

| | |
|-----------------------|--------------|
| Temperature of medium | -50...200 °C |
| Ambient temperature | -25...80 °C |
| Storage temperature | -25...80 °C |
| Pressure Resistance | 100 bar |
| Shock Resistance | IEC 60751 |
| Vibration resistance | IEC 60751 |


Mechanical Data

| | |
|---------------------------------|------------------------|
| Housing Material | 1.4404 |
| Material in contact with media | 1.4404 |
| Degree of Protection | IP68/IP69K * |
| Connection | M12 x 1; 4-pin |
| Process Connection | Sealing cone M18 x 1,5 |
| Process Connection Length (PCL) | 64 mm |
| Probe Length (PL) | 32 mm |


PT100

| | |
|-----------------------------------|-----------|
| Connection Diagram No. | 140 |
| Suitable Connection Equipment No. | 2 |
| Suitable Mounting Technology No. | 900 901 |

* Tested by wenglor

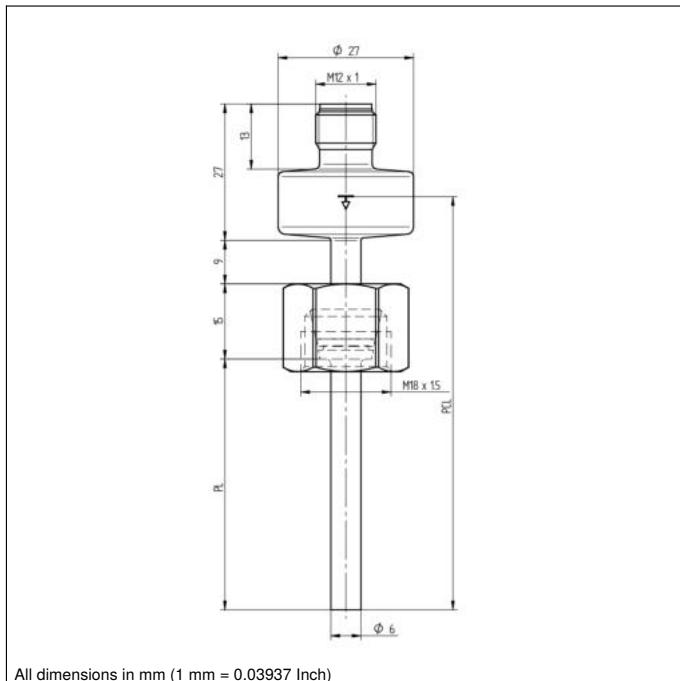

All dimensions in mm (1 mm = 0.03937 Inch)

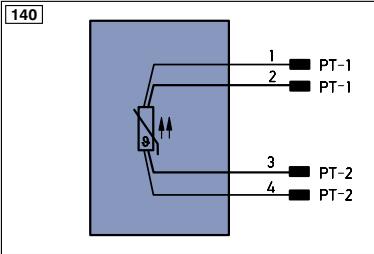
Legend

| | |
|------------------------------------|--|
| PT | Platinum measuring resistor |
| nc | not connected |
| U | Test Input |
| Ü | Test Input inverted |
| W | Trigger Input |
| W - | Ground for the Trigger Input |
| O | Analog Output |
| O - | Ground for the Analog Output |
| BZ | Block Discharge |
| Awv | Valve Output |
| a | Valve Control Output + |
| b | Valve Control Output 0 V |
| SY | Synchronization |
| SY - | Ground for the Synchronization |
| E+ | Receiver-Line |
| E- | Emitter-Line |
| ± | Grounding |
| SnR | Switching Distance Reduction |
| RxD | Interface Receive Path |
| TxD | Interface Send Path |
| RDY | Ready |
| GND | Ground |
| CL | Clock |
| E/A | Output/Input programmable |
| IO-Link | IO-Link |
| PoE | Power over Ethernet |
| IN | Safety Input |
| SSO | Safety Output |
| Signal | Signal Output |
| BL-D | Ethernet Gigabit bidirect. data line (A-D) |
| EN0542 | Encoder 0-pulse 0-0 (TTL) |
| ENARS42 | Encoder A/Ā (TTL) |
| ENBRS42 | Encoder B/Ā (TTL) |
| ENA | Encoder A |
| ENB | Encoder B |
| AMIN | Digital output MIN |
| AMAX | Digital output MAX |
| AOK | Digital output OK |
| SY IN | Synchronization IN |
| SY OUT | Synchronization OUT |
| OLT | Brightness output |
| M | Maintenance |
| rsv | reserved |
| Wire Colors according to IEC 60757 | |
| BK | Black |
| BN | Brown |
| RD | Red |
| OG | Orange |
| YE | Yellow |
| GN | Green |
| BU | Blue |
| VT | Violet |
| GY | Grey |
| WH | White |
| PK | Pink |
| GNYE | Green/Yellow |

