

# Retro-Reflex Sensor

## Universal

# LB66PC7K

Part Number



- Contamination warning
- Glossy objects can be detected
- Integrated output
- Micro-design

## Technical Data

### Optical Data

|                                    |           |
|------------------------------------|-----------|
| Range                              | 1300 mm   |
| Reference Reflector/Reflector Foil | RQ100BA   |
| Switching Hysteresis               | < 15 %    |
| Light Source                       | Red Light |
| Polarization Filter                | yes       |
| Service Life (T = +25 °C)          | 100000 h  |
| Max. Ambient Light                 | 10000 Lux |
| Light Spot Diameter                | see Table |
| Two-Lens Optic                     | yes       |

### Electrical Data

|                                             |              |
|---------------------------------------------|--------------|
| Supply Voltage                              | 10...30 V DC |
| Current Consumption (U <sub>b</sub> = 24 V) | < 20 mA      |
| Switching Frequency                         | 1800 Hz      |
| Response Time                               | 270 µs       |
| Temperature Drift                           | < 10 %       |
| Temperature Range                           | -10...60 °C  |
| Switching Output Voltage Drop               | < 2,5 V      |
| PNP Switching Output/Switching Current      | 100 mA       |
| Residual Current Switching Output           | < 50 µA      |
| Short Circuit Protection                    | yes          |
| Reverse Polarity Protection                 | yes          |
| Overload Protection                         | yes          |
| Protection Class                            | III          |

### Mechanical Data

|                      |                 |
|----------------------|-----------------|
| Housing Material     | Stainless Steel |
| Degree of Protection | IP67            |
| Connection           | M8 × 1; 4-pin   |
| Cable Length         | 20 cm           |

PNP NO

Connection Diagram No.

175

Control Panel No.

B2


Suitable Connection Equipment No.

7

Suitable Mounting Technology No.

200


A reflector must be used in combination with these sensors. They can be installed in all kinds of industrial environments thanks to ample functional reserve. Even reflective objects can be reliably recognized through the use of polarized light.

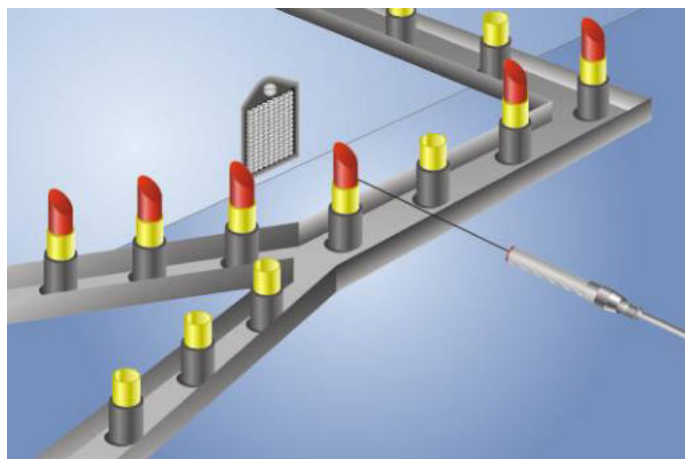

## Complementary Products

PNP-NPN Converter BG7V1P-N-2M

Reflector, Reflector Foil

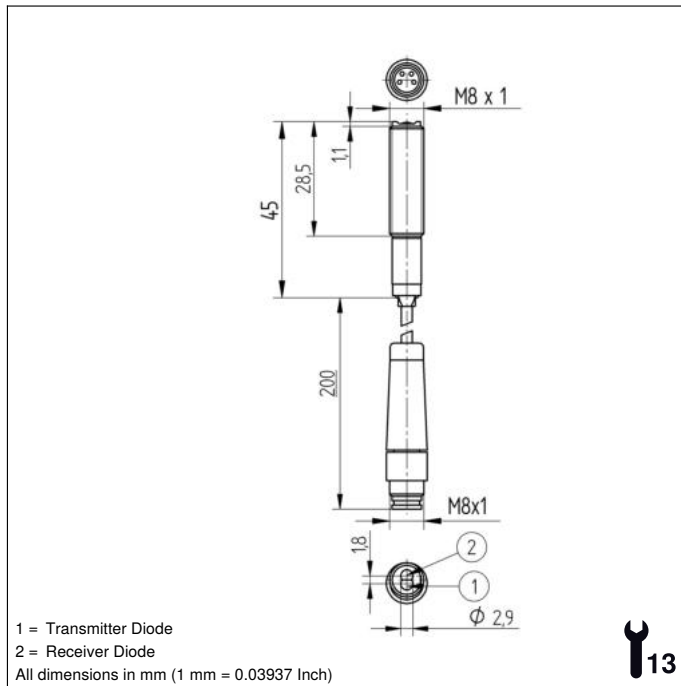


## Ctrl. Panel

B2



30 = Switching Status/Contamination Warning

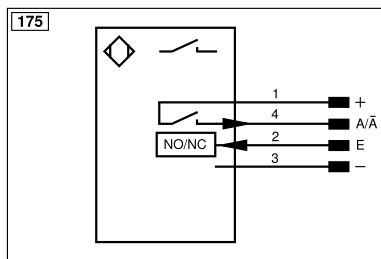

| Legend    |                                            |                                        |                                |
|-----------|--------------------------------------------|----------------------------------------|--------------------------------|
| +         | Supply Voltage +                           | nc                                     | Not connected                  |
| -         | Supply Voltage 0 V                         | U                                      | Test Input                     |
| ~         | Supply Voltage (AC Voltage)                | Ů                                      | Test Input inverted            |
| A         | Switching Output (NO)                      | W                                      | Trigger Input                  |
| Ā         | Switching Output (NC)                      | W-                                     | Ground for the Trigger Input   |
| V         | Contamination/Error Output (NO)            | O                                      | Analog Output                  |
| Ȳ         | Contamination/Error Output (NC)            | O-                                     | Ground for the Analog Output   |
| E         | Input (analog or digital)                  | BZ                                     | Block Discharge                |
| T         | Teach Input                                | Amv                                    | Valve Output                   |
| Z         | Time Delay (activation)                    | a                                      | Valve Control Output +         |
| S         | Shielding                                  | b                                      | Valve Control Output 0 V       |
| RxD       | Interface Receive Path                     | SY                                     | Synchronization                |
| TxD       | Interface Send Path                        | SY-                                    | Ground for the Synchronization |
| RDY       | Ready                                      | E+                                     | Receiver-Line                  |
| GND       | Ground                                     | S+                                     | Emitter-Line                   |
| CL        | Clock                                      | ±                                      | Grounding                      |
| E/A       | Output/Input programmable                  | SnR                                    | Switching Distance Reduction   |
| IO-Link   |                                            | Rx+/-                                  | Ethernet Receive Path          |
| PoE       | Power over Ethernet                        | Tx+/-                                  | Ethernet Send Path             |
| IN        | Safety Input                               | Bus                                    | Interfaces-Bus A(+)/B(-)       |
| OSSD      | Safety Output                              | La                                     | Emitted Light disengageable    |
| Signal    | Signal Output                              | Mag                                    | Magnet activation              |
| BI_D+/-   | Ethernet Gigabit bidirect. data line (A-D) | RES                                    | Input confirmation             |
| ENo RS422 | Encoder 0-pulse 0/0 (TTL)                  | EDM                                    | Contact Monitoring             |
| PT        | Platinum measuring resistor                | ENARs422                               | Encoder A/A (TTL)              |
|           |                                            | ENBrs422                               | Encoder B/B (TTL)              |
|           |                                            | ENA                                    | Encoder A                      |
|           |                                            | ENb                                    | Encoder B                      |
|           |                                            | AMIN                                   | Digital output MIN             |
|           |                                            | AMAX                                   | Digital output MAX             |
|           |                                            | ACK                                    | Digital output OK              |
|           |                                            | SY In                                  | Synchronization In             |
|           |                                            | SY OUT                                 | Synchronization OUT            |
|           |                                            | OLT                                    | Brightness output              |
|           |                                            | M                                      | Maintenance                    |
|           |                                            | rsv                                    | Reserved                       |
|           |                                            | Wire Colors according to DIN IEC 60757 |                                |
|           |                                            | BK                                     | Black                          |
|           |                                            | BN                                     | Brown                          |
|           |                                            | RD                                     | Red                            |
|           |                                            | OG                                     | Orange                         |
|           |                                            | YE                                     | Yellow                         |
|           |                                            | GN                                     | Green                          |
|           |                                            | BU                                     | Blue                           |
|           |                                            | VT                                     | Violet                         |
|           |                                            | GY                                     | Grey                           |
|           |                                            | WH                                     | White                          |
|           |                                            | PK                                     | Pink                           |
|           |                                            | GNYE                                   | Green/Yellow                   |

Table 1

| Working Distance    | 200 mm | 500 mm | 1000 mm |
|---------------------|--------|--------|---------|
| Light Spot Diameter | 35 mm  | 80 mm  | 160 mm  |

## Feasible reflector distance

Reflector type, mounting distance

|           |              |           |               |
|-----------|--------------|-----------|---------------|
| RQ100BA   | 0,02...1,3 m | RR25_M    | 0,01...0,4 m  |
| RE18040BA | 0,02...1 m   | RR25KP    | 0,01...0,25 m |
| RQ84BA    | 0,01...1,1 m | RR21_M    | 0,01...0,25 m |
| RR84BA    | 0,02...1 m   | ZRAE02B01 | 0,02...0,6 m  |
| RE9538BA  | 0,01...0,6 m | ZRME01B01 | 0,01...0,2 m  |
| RE6151BM  | 0...1,1 m    | ZRME03B01 | 0,02...0,6 m  |
| RE6151BH  | 0,02...0,6 m | ZRMR02K01 | 0,01...0,25 m |
| RR50_A    | 0...0,8 m    | ZRMS02_01 | 0,01...0,3 m  |
| RE6040BA  | 0,01...0,8 m | RF505     | 0,02...0,4 m  |
| RE8222BA  | 0,02...0,7 m | RF255     | 0,02...0,3 m  |
| RR34_M    | 0,01...0,5 m | RF508     | 0,03...0,5 m  |
| RE3220BM  | 0...0,5 m    | RF258     | 0,03...0,4 m  |
| RE6210BM  | 0,01...0,3 m | ZRDF_K01  | 0,03...1 m    |

