

2D/3D Profile Sensor

MLSL245 LASER


Part Number

weCat3D



- Compact, lightweight design – even suitable for robot applications
- Precise measuring range resolution X (> 1200 measuring points)
- Up to 3.6 million measuring points per second

2D/3D Profile Sensors project a laser line onto the object to be detected and generate an accurate, linearized height profile with an internal camera which is set up at a triangulation angle. Thanks to its uniform, open interface, the weCat3D series can be incorporated by means of the DLL program library or the GigE Vision standard without an additional control unit. Alternatively, wenglor offers its own software packages for implementing your application.

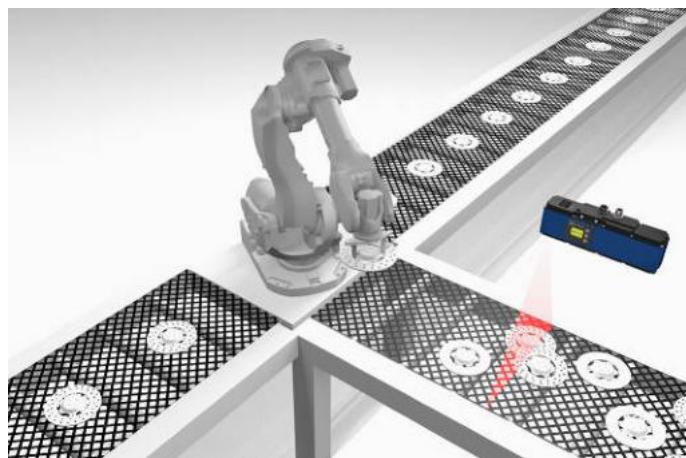

Technical Data

Optical Data

Working range Z	280...1280 mm
Measuring range Z	1000 mm
Measuring range X	200...850 mm
Linearity Deviation	500 µm
Resolution Z	40...570 µm
Resolution X	190...760 µm
Light Source	Laser (red)
Wavelength	660 nm
Laser Class (EN 60825-1)	3R
Max. Ambient Light	5000 Lux

Electrical Data

Supply Voltage	18...30 V DC
Current Consumption (Ub = 24 V)	300 mA
Measuring Rate	200...4000 /s
Subsampling	800...4000 /s
Temperature Range	0...45 °C
Storage temperature	-20...70 °C
Inputs/Outputs	4
Switching Output Voltage Drop	< 1,5 V
Switching Output/Switching Current	100 mA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Interface	Ethernet TCP/IP
Baud Rate	100/1000 Mbit/s
Protection Class	III
FDA Accession Number	1710963-000


Mechanical Data

Housing Material	Aluminium; Plastic
Degree of Protection	IP67
Connection	M12 x 1; 12-pin
Type of Connection Ethernet	M12 x 1; 8-pin, X-cod.
Connection: external 24 V laser circuit	M12 x 1; 8-pin
Optic Cover	Plastic
Weight	550 g
Web server	yes
Configurable as PNP/NPN/Push-Pull	
Switchable to NC/NO	● ●
Connection Diagram No.	1022 1025 1034
Control Panel No.	X2 A26
Suitable Connection Equipment No.	50 87 89
Suitable Mounting Technology No.	343


Display brightness may decrease with age. This does not result in any impairment of the sensor function.

Complementary Products


Control Unit
Cooling Unit ZLSK001
Protective Screen Retainer ZLSS002
Software
Switch EHSS001

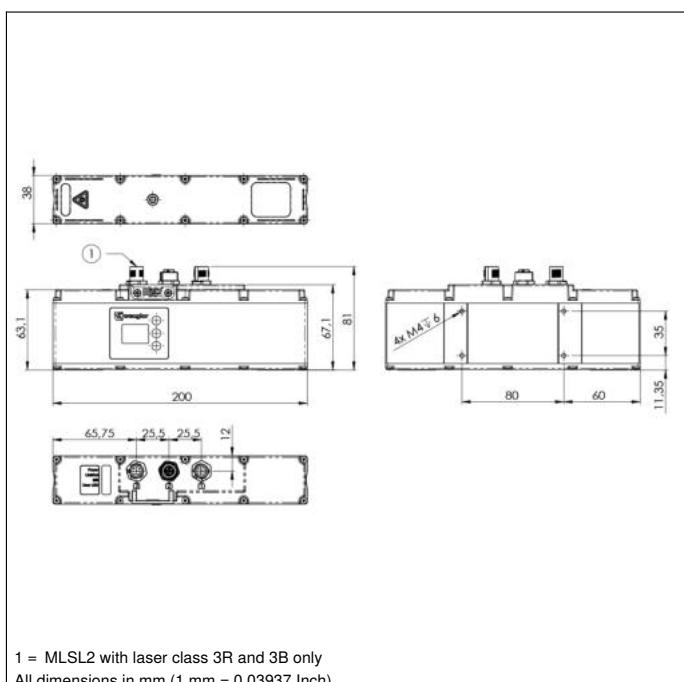

Ctrl. Panel



20 = Enter Button
22 = UP Button
23 = Down Button
4a = User LED
60 = Display
68 = Supply Voltage Indicator
78 = Module status
7a = Laser (MLSL2 with laser class 3R and 3B only)
85 = Link/Act LED

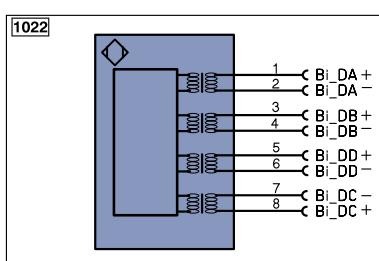

Legend



+	Supply Voltage +
-	Supply Voltage 0 V
~	Supply Voltage (AC Voltage)
A	Switching Output (NO)
Ā	Switching Output (NC)
V	Contamination/Error Output (NO)
ĀV	Contamination/Error Output (NC)
E	Input (analog or digital)
T	Teach Input
Z	Time Delay (activation)
S	Shielding
RxD	Interface Receive Path
TxD	Interface Send Path
RDY	Ready
GND	Ground
CL	Clock
E/A	Output/Input programmable
IO-Link	IO-Link
PoE	Power over Ethernet
IN	Safety Input
DSO	Safety Output
Signal	Signal Output
BL-D	Ethernet Gigabit bidirec. data line (A-D)
EN _{RS422}	Encoder 0-pulse 0-0 (TTL)

PT	Platinum measuring resistor
nc	not connected
U	Test Input
ĀU	Test Input inverted
W	Trigger Input
W-	Ground for the Trigger Input
O	Analog Output
O-	Ground for the Analog Output
BZ	Block Discharge
AVV	Valve Output
a	Valve Control Output +
b	Valve Control Output 0 V
SY	Synchronization
SY-	Ground for the Synchronization
E+	Receiver-Line
S+	Emitter-Line
±	Grounding
SnR	Switching Distance Reduction
Rx+/-	Ethernet Receive Path
Tx+/-	Ethernet Send Path
Bus	Interfaces-Bus A(+)/B(-)
La	Emitted Light disengageable
Mag	Magnet activation
RES	Input confirmation
EDM	Contactor Monitoring

EN_{RS422} Encoder A/Ā (TTL)
EN_{BR422} Encoder B/Ā (TTL)
ENA Encoder A
ENB Encoder B
AMIN Digital output MIN
AMAX Digital output MAX
AOK Digital output OK
SY IN Synchronization IN
SY OUT Synchronization OUT
OLT Brightness output
M Maintenance
rsv reserved


Wire Colors according to IEC 60757

BK	Black
BN	Brown
RD	Red
OG	Orange
YE	Yellow
GN	Green
BU	Blue
VT	Violet
GY	Grey
WH	White
PK	Pink
GNYE	Green/Yellow

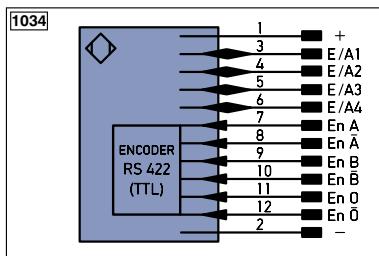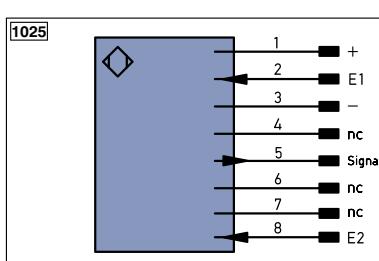

Measuring field X, Z

MLSL2x5

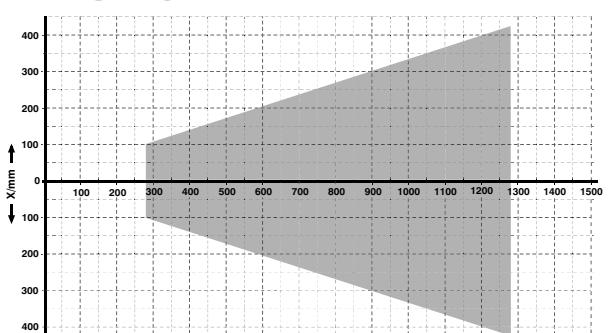

Z = Working distance

X = Measuring Range

