

Light Curtain for Measuring Tasks

OSEI152Z0103

Part Number



● Test input

Technical Data

Optical Data

Range	2000 mm
Measurement Field Height (MFH)	150 mm
Beam Distance	2 mm
Light Source	Infrared Light
Service Life (T = +25 °C)	100000 h

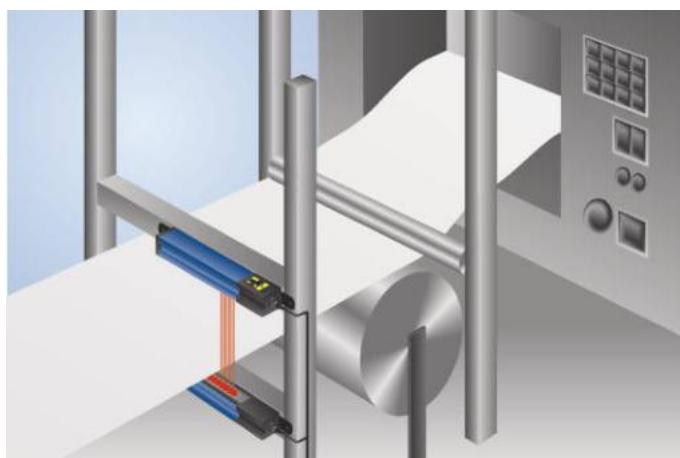
Electrical Data

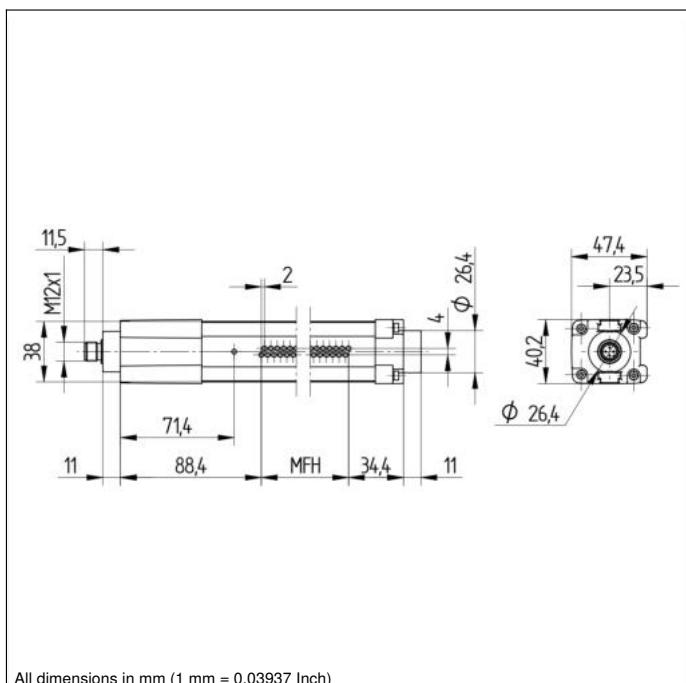

Sensor Type	Emitter
Supply Voltage	18...30 V DC
Current Consumption (Ub = 24 V)	< 60 mA
Temperature Drift	< 10 %
Temperature Range	-25...60 °C
Reverse Polarity Protection	yes
Test input	yes
Protection Class	III
Mechanical Data	
Housing Material	Aluminum
Degree of Protection	IP65
Connection	M12 x 1; 4-pin
Connection Diagram No.	1018
Control Panel No.	K3
Suitable Connection Equipment No.	2
Suitable Mounting Technology No.	700

Suitable Receiver

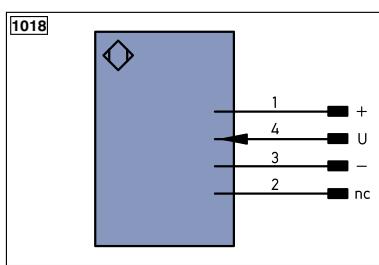
OEEI152U0135

As these light curtains for measurement task are equipped with an integrated evaluation unit, external connection units are not needed. Objects are both recognized (via the digital output) and measured (via the analog output). The light curtains can be set up easily using the menu-controlled graphic display. Convenient parametrization and quick diagnosis is possible via the IO-Link interface. The adequate mounting angle BEF-SET-33 is included in the delivery.




Ctrl. Panel


04 = Function Indicator


Legend

+	Supply Voltage +	PT	Platinum measuring resistor
-	Supply Voltage 0 V	nc	not connected
~	Supply Voltage (AC Voltage)	U	Test Input
A	Switching Output (NO)	Ü	Test Input inverted
Å	Switching Output (NC)	W	Trigger Input
V	Contamination/Error Output (NO)	W-	Ground for the Trigger Input
Å	Contamination/Error Output (NC)	O	Analog Output
E	Input (analog or digital)	O-	Ground for the Analog Output
T	Teach Input	BZ	Block Discharge
Z	Time Delay (activation)	Awv	Valve Output
S	Shielding	a	Valve Control Output +
RxD	Interface Receive Path	b	Valve Control Output 0 V
TxD	Interface Send Path	SY	Synchronization
RDY	Ready	SY-	Ground for the Synchronization
GND	Ground	E+	Receiver-Line
CL	Clock	E-	Emitter-Line
E/A	Output/Input programmable	±	Grounding
IO-Link		SnR	Switching Distance Reduction
PoE	Power over Ethernet	Rx+/-	Ethernet Receive Path
IN	Safety Input	Tx+/-	Ethernet Send Path
SSD	Safety Output	Bus	Interfaces-Bus A(+)/B(-)
Signal	Signal Output	La	Emitted Light disengageable
BLD	Ethernet Gigabit bidirect. data line (A-D)	Mag	Magnet activation
EN0RS422	Encoder 0-pulse 0-0 (TTL)	RES	Input confirmation
		EDM	Contactor Monitoring

EN0RS422 Encoder A/Ä (TTL)

EN0RS422 Encoder B/ß (TTL)

ENA Encoder A

ENB Encoder B

AMIN Digital output MIN

AMAX Digital output MAX

AOK Digital output OK

SY IN Synchronization IN

SY OUT Synchronization OUT

OLT Brightness output

M Maintenance

rsv reserved

Wire Colors according to DIN IEC 757

BK Black

BN Brown

RD Red

OG Orange

YE Yellow

GN Green

BU Blue

VT Violet

GY Grey

WH White

PK Pink

GNYE Green/Yellow

