

Through-Beam Sensor

OSII403Z0103

Part Number



- **Hygienic design makes it easy to clean**
- **Made with food safe materials that are FDA approved**
- **Touch teach-in, external teach-in**
- **Waterproof (IP68/IP69K)**

Technical Data

Optical Data

Range	4000 mm
Light Source	Red Light
Service Life (T = +25 °C)	100000 h
Opening Angle	3 °

Electrical Data

Sensor Type	Emitter
Supply Voltage	10...30 V DC
Current Consumption (Ub = 24 V)	< 40 mA
Temperature Drift	< 10 %
Temperature Range	-25...60 °C
Reverse Polarity Protection	yes
Overload Protection	yes
Teach Mode	NT, MT, XT
Test input	yes
Protection Class	III

Mechanical Data

Setting Method	Teach-In
Housing Material	Stainless steel 316L
Degree of Protection	IP68/IP69K
Connection	M12 x 1; 4-pin
Optic Cover	PMMA (FDA)
Material Control Panel	PC (FDA)

Connection Diagram No. **1018**

Control Panel No. **II2**


Suitable Connection Equipment No. **2**

Suitable Mounting Technology No. **140 | 490**

Suitable Receiver

OEII403C0103

InoxSens is the hygiene series from wenglor. The innovative design of InoxSens sensors allows contamination and cleaning agents to flow off by themselves. A variety of components form a complete system which integrates seamlessly into the machine. The laser welded stainless steel housing made of V4A (1.4404/316L) is corrosion-free and resistant to cleaning agents. Gap-free mounting with InoxLock and the captive optics further contribute to these sensors' optimal suitability for cleaning-heavy environments. The InoxSens sensors are set up with the help of touch teach-in and is made possible by the hermetically sealed housing.

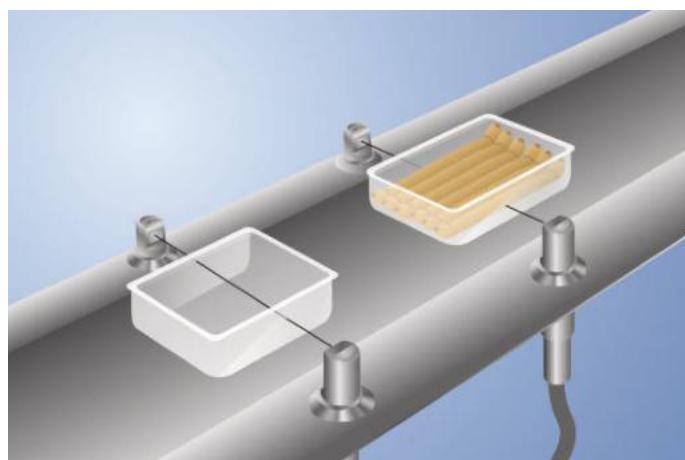


Complementary Products

Adapterbox A232

Ctrl. Panel


112

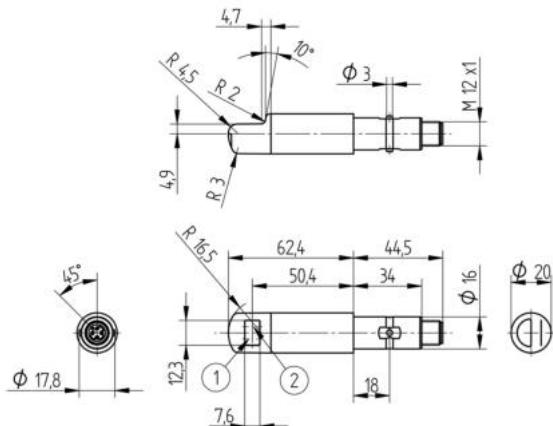

1 = Emitter

2 = no function

All dimensions in mm (1 mm = 0.03937 Inch)

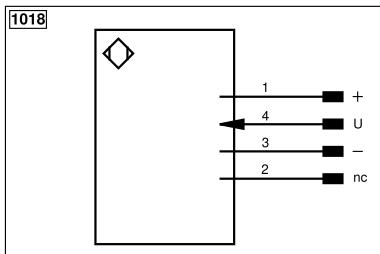

Legend

+	Supply Voltage +	nc	Not connected	EN _{BRs422}	Encoder B/Ā (TTL)
-	Supply Voltage 0 V	U	Test Input	ENA	Encoder A
~	Supply Voltage (AC Voltage)	Ū	Test Input inverted	ENb	Encoder B
A	Switching Output (NO)	W	Trigger Input	AMIN	Digital output MIN
Ā	Switching Output (NC)	W-	Ground for the Trigger Input	AMAX	Digital output MAX
V	Contamination/Error Output (NO)	O	Analog Output	AOK	Digital output OK
Ā	Contamination/Error Output (NC)	O-	Ground for the Analog Output	SY IN	Synchronization In
E	Input (analog or digital)	BZ	Block Discharge	SY OUT	Synchronization OUT
T	Teach Input	AMV	Valve Output	OLT	Brightness output
Z	Time Delay (activation)	a	Valve Control Output +	M	Maintenance
S	Shielding	b	Valve Control Output 0 V	rsv	Reserved
RxD	Interface Receive Path	SY	Synchronization	Wire Colors according to DIN IEC 60757	
TxD	Interface Send Path	SY-	Ground for the Synchronization	BK	Black
RDY	Ready	E+	Receiver-Line	BN	Brown
GND	Ground	S+	Emitter-Line	RD	Red
CL	Clock	÷	Grounding	OG	Orange
E/A	Output/Input programmable	SnR	Switching Distance Reduction	YE	Yellow
IO-Link	over EtherNet	Rx+/-	Ethernet Receive Path	GN	Green
PoE	over EtherNet	Tx+/-	Ethernet Send Path	BU	Blue
IN	Safety Input	Bus	Interfaces-Bus A(+)/B(-)	VT	Violet
OSSD	Safety Output	La	Emitted Light disengageable	GY	Grey
Signal	Signal Output	Mag	Magnet activation	WH	White
BI_D+/-	Ethernet Gigabit bidirect. data line (A-D)	RES	Input confirmation	PK	Pink
EN _{RS422}	Encoder 0-pulse 0/0 (TTL)	EDM	Contactor Monitoring	GNYE	Green/Yellow
PT	Platinum measuring resistor	FNAs _{RS422}	Encoder A/Ā (TTL)		