

# Reflex Sensor with Background Suppression


## P2KH004

Part Number



- Condition monitoring
- Low switching distance deviation for black/white
- Reliably detect objects against any background
- Robust stainless steel housing with IP69K

The reflex sensor with background suppression works with red light according to the angle measurement principle and is suitable for the detection of objects against any background. The sensor always has the same switching distance, regardless of the color, shape, and surface of the objects. Minimal height differences can be detected with the sensors and, for example, various parts can be reliably differentiated from each other. The IO-Link interface can be used to configure retro-reflex sensors (PNP/NPN, NC/NO, switching distance), as well as to output switching statuses and distance values. The robust V4A (1.4404/316L) stainless steel housing is resistant to oils and coolants, as well as cleaning agent.

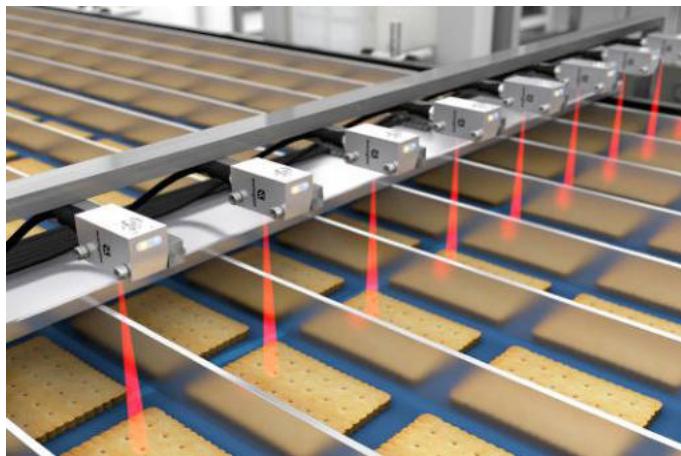

### Technical Data

#### Optical Data

|                           |             |
|---------------------------|-------------|
| Range                     | 150 mm      |
| Adjustable Range          | 30...150 mm |
| Switching Hysteresis      | < 10 %      |
| Light Source              | Red Light   |
| Service Life (T = +25 °C) | 100000 h    |
| Max. Ambient Light        | 10000 Lux   |
| Light Spot Diameter       | see Table 1 |

#### Electrical Data

|  |              |
|--|--------------|
| Supply Voltage                               | 10...30 V DC |
| Supply Voltage with IO-Link                  | 18...30 V DC |
| Current Consumption (Ub = 24 V)              | < 20 mA      |
| Switching Frequency                          | 1000 Hz      |
| Switching Frequency (interference-free mode) | 500 Hz       |
| Response Time                                | 0,5 ms       |
| Response time (interference-free mode)       | 1 ms         |
| Temperature Drift                            | < 5 %        |
| Temperature Range                            | -40...60 °C  |
| Switching Output Voltage Drop                | < 2 V        |
| Switching Output/Switching Current           | 100 mA       |
| Residual Current Switching Output            | < 50 µA      |
| Short Circuit and Overload Protection        | yes          |
| Reverse Polarity Protection                  | yes          |
| Lockable                                     | yes          |
| Interface                                    | IO-Link V1.1 |
| Protection Class                             | III          |

#### Mechanical Data


|                      |                      |
|----------------------|----------------------|
| Setting Method       | Potentiometer        |
| Housing Material     | Stainless steel 316L |
| Degree of Protection | IP68/IP69K           |
| Connection           | M8 x 1; 3-pin        |
| Optic Cover          | PMMA                 |
| Ecolab               | yes                  |

#### Safety-relevant Data

|                                   |           |
|-----------------------------------|-----------|
| MTTFd (EN ISO 13849-1)            | 1705,77 a |
| PNP NO                            | ●         |
| IO-Link                           | ●         |
| Connection Diagram No.            | 216       |
| Control Panel No.                 | 1K1       |
| Suitable Connection Equipment No. | 8         |
| Suitable Mounting Technology No.  | 400       |


### Complementary Products

IO-Link Master  
Software

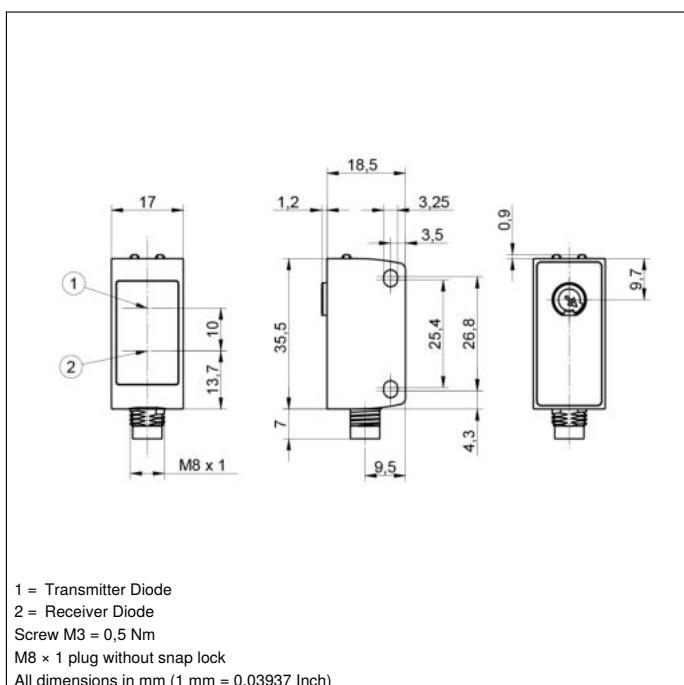


### Ctrl. Panel

1K1



05 = Switching Distance Adjuster  
30 = Switching Status/Contamination Warning  
68 = supply voltage indicator

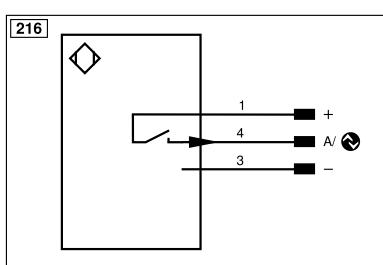

#### Legend

|           |  |          |                                |  |                     |
|-----------|--|----------|--------------------------------|--|---------------------|
| +         | Supply Voltage +                           | nc       | Not connected                  | ENB <sub>RS422</sub>                   | Encoder B/B (TTL)   |
| -         | Supply Voltage 0 V                         | U        | Test Input                     | ENA                                    | Encoder A           |
| ~         | Supply Voltage (AC Voltage)                | Ü        | Test Input inverted            | ENB                                    | Encoder B           |
| A         | Switching Output (NO)                      | W        | Trigger Input                  | AMIN                                   | Digital output MIN  |
| Ä         | Switching Output (NC)                      | W-       | Ground for the Trigger Input   | AMAX                                   | Digital output MAX  |
| V         | Contamination/Error Output (NO)            | O        | Analog Output                  | Aok                                    | Digital output OK   |
| Ý         | Contamination/Error Output (NC)            | O-       | Ground for the Analog Output   | SY In                                  | Synchronization In  |
| E         | Input (analog or digital)                  | BZ       | Block Discharge                | SY OUT                                 | Synchronization OUT |
| T         | Teach Input                                | AMV      | Valve Output                   | Ol                                     | Brightness output   |
| Z         | Time Delay (activation)                    | a        | Valve Control Output +         | M                                      | Maintenance         |
| S         | Shielding                                  | b        | Valve Control Output 0 V       | rsv                                    | Reserved            |
| RxD       | Interface Receive Path                     | SY       | Synchronization                | Wire Colors according to DIN IEC 60757 |                     |
| TxD       | Interface Send Path                        | SY-      | Ground for the Synchronization | BK                                     | Black               |
| RDY       | Ready                                      | E+       | Receiver-Line                  | BN                                     | Brown               |
| GND       | Ground                                     | S+       | Emitter-Line                   | RD                                     | Red                 |
| CL        | Clock                                      | ±        | Grounding                      | OG                                     | Orange              |
| E/A       | Output/Input programmable                  | SnR      | Switching Distance Reduction   | YE                                     | Yellow              |
| IO-Link   |  | Rx+/-    | Ethernet Receive Path          | GN                                     | Green               |
| PoE       | Power over Ethernet                        | Tx+/-    | Ethernet Send Path             | BU                                     | Blue                |
| IN        | Safety Input                               | Bus      | Interfaces-Bus A(+)/B(-)       | VT                                     | Violet              |
| OSSD      | Safety Output                              | La       | Emitted Light disengageable    | GY                                     | Grey                |
| Signal    | Signal Output                              | Mag      | Magnet activation              | WH                                     | White               |
| BI_D+/-   | Ethernet Gigabit bidirect. data line (A-D) | RES      | Input confirmation             | PK                                     | Pink                |
| EN0 RS422 | Encoder 0-pulse 0/Ü (TTL)                  | EDM      | Contactor Monitoring           | GNYE                                   | Green/Yellow        |
| PT        | Platinum measuring resistor                | ENARS422 | Encoder A/A (TTL)              |  |                     |


Table 1

| Detection Range     | 50 mm | 100 mm | 150 mm |
|---------------------|-------|--------|--------|
| Light Spot Diameter | 5 mm  | 7 mm   | 10 mm  |

### Switching Distance Deviation

Typical characteristic curve based on white, 90 % remission

PxKH

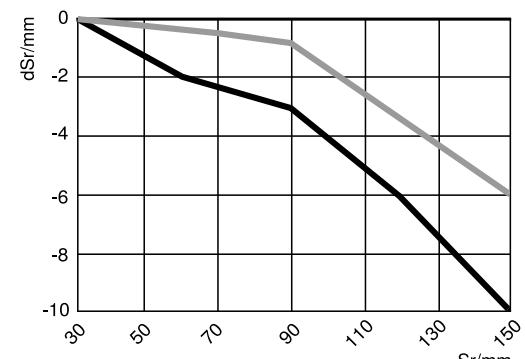

Sr = Switching Distance

dSr = Switching Distance Change

