

Laser Distance Sensor

Long-Range


P2PY105 LASER

Part Number



- 2 mutually independent switching outputs
- Interchangeable optical lens
- Robust stainless steel housing with IP69K
- Wide working range and precise detection thanks to DS technology

The sensors function in accordance with the time-of-flight principle with laser class 1. The wintec with Dynamic Sensitivity technology (DS) enables previously unattainable reception sensitivity even with very weak signals. As a result, the sensors have a large working range of up to 10 m and can reliably detect dark or shiny objects even at extreme angles. The wintec also works very well in adverse ambient conditions, e.g., ambient light or dirt. The robust 316L stainless steel housing (1.4404) is resistant to oils and coolants. The optical lens is easy to replace after wear, caused, for example, by welding spatter or sparks.

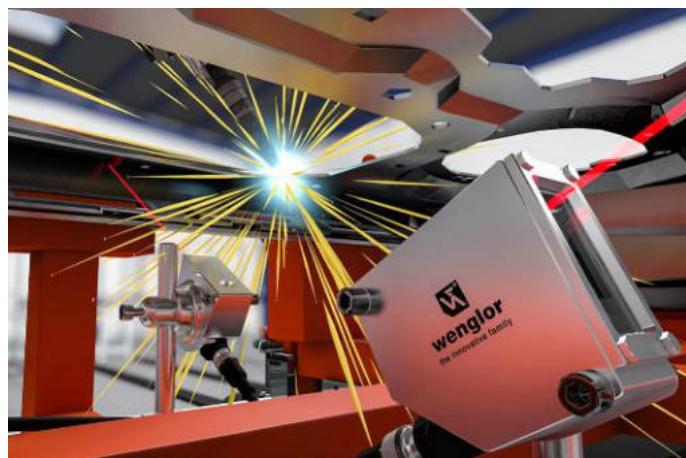

PNG//smart, der wintec.

Technical Data

Optical Data

Working Range	0...10000 mm
Adjustable Range	50...10000 mm
Reproducibility maximum	3 mm*
Linearity Deviation	10 mm*
Switching Hysteresis	< 15 mm
Light Source	Laser (red)
Wavelength	660 nm
Service Life (T = +25 °C)	100000 h
Laser Class (EN 60825-1)	1
Beam Divergence	< 2 mrad
Max. Ambient Light	100000 Lux
Light Spot Diameter	see Table 1

Electrical Data

Supply Voltage	18...30 V DC
Current Consumption (Ub = 24 V)	< 35 mA
Switching Frequency	50 Hz*
Switching Frequency (max.)	250 Hz*
Response Time	15 ms *
Response Time (min.)	4,7 ms *
Temperature Drift	< 0,4 mm/K
Temperature Range	-40...55 °C
Number of Switching Outputs	2
Switching Output Voltage Drop	< 2,5 V
Switching Output/Switching Current	100 mA
Reverse Polarity and Overload Protection	yes
Short Circuit Protection	yes
Interface	IO-Link V1.1
Baud Rate	COM3
Protection Class	III

Mechanical Data

Setting Method	Teach-In
Housing Material	Stainless steel 316L
Optic Cover	PMMA
Degree of Protection	IP68/IP69K
Connection	M12 x 1; 4/5-pin

Safety-relevant Data



MTTFd (EN ISO 13849-1)	543,71 a
PNP NO	●
IO-Link	●
Acceleration sensor	●
Connection Diagram No.	243
Control Panel No.	II6
Suitable Connection Equipment No.	2 35
Suitable Mounting Technology No.	380

* Depends on mode, see table 2


Complementary Products

IO-Link Master

Software

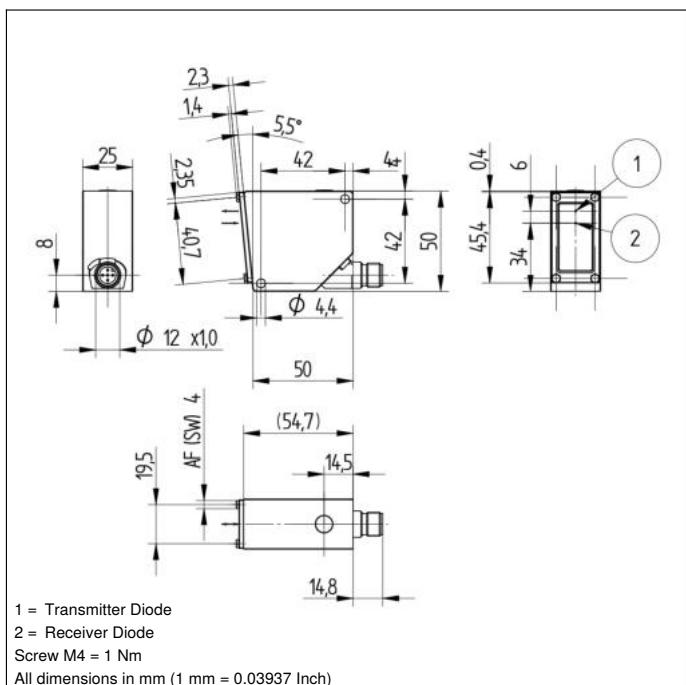
Ctrl. Panel
II6


06 = Teach Button
5a = Switching Status Display, O1
68 = supply voltage indicator
6a = Switching Status Display, O2

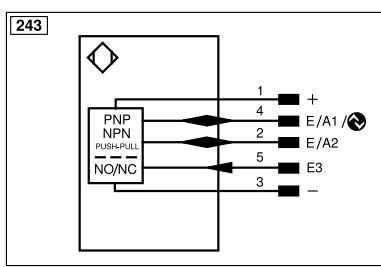


Mode	White working range	Gray working range	Black working range	Switching frequency	Response time	Maximum reproducibility	Linearity deviation	Low signal detection
Speed	0...10000 mm	0...9000 mm	0...7000 mm	250 Hz	4.7 ms	5 mm	15 mm	+
Precision (default)	0...10000 mm	0...10000 mm	0...8000 mm	50 Hz	15 ms	3 mm	10 mm	++
Precision Plus	0...10000 mm	0...10000 mm	0...8000 mm	25 Hz	28.7 ms	3 mm	10 mm	+++

Table 2
Table 1

Working Distance	0 m	5 m	10 m
Light Spot Diameter	5 mm	10 mm	15 mm

Switching Distance Deviation

Typical characteristic curve based on white, 90 % remission

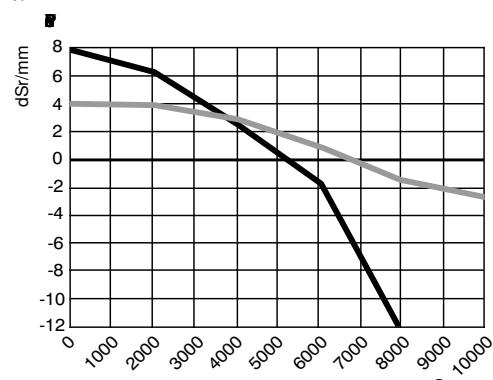

Sr = Switching Distance

dSr = Switching Distance Change

black 6 % remission

grey 18 % remission

