

# Laser Distance Sensor

## Long-Range

### P2PY107 LASER

Part Number



- **Analog output 0...10 V**
- **No interactive influence**
- **Robust stainless steel housing with IP69K**
- **Wide working range and precise detection thanks to DS technology**

The sensors function in accordance with the principle of transit time measurement with laser class 1. The wintec with "Dynamic Sensitivity" technology (DS) enables previously unattainable reception sensitivity even with very weak signals. As a result, the sensors have a large working range of up to 10 m and can reliably detect dark or shiny objects even at extremely inclined angles. The wintec also works very reliably in disturbing ambient conditions, e.g. due to ambient light or dirt. Extensive condition monitoring functions also enable predictive maintenance and trouble-free operation. The robust V4A (1.4404/316L) stainless steel housing is resistant to oils and coolants, as well as cleaning agent.

PNG//smart, der wintec.

#### Technical Data

##### Optical Data

Working Range	0...10000 mm
Adjustable Range	50...10000 mm
Reproducibility maximum	3 mm
Linearity Deviation	10 mm
Switching Hysteresis	< 15 mm
Light Source	Laser (red)
Wavelength	660 nm
Service Life (T = +25 °C)	100000 h
Laser Class (EN 60825-1)	1
Beam Divergence	< 2 mrad
Max. Ambient Light	100000 Lux
Light Spot Diameter	see Table 1

##### Electrical Data

Supply Voltage	18...30 V DC
Current Consumption (Ub = 24 V)	< 40 mA
Measuring Rate	100 /s*
Measuring Rate (max.)	500 /s*
Temperature Drift	< 0,4 mm/K
Temperature Range	-40...55 °C
Analog Output	0...10 V
Reverse Polarity and Overload Protection	yes
Short Circuit Protection	yes
Interface	IO-Link V1.1
Baud Rate	COM3
Protection Class	III
FDA Accession Number	2110079-000


##### Mechanical Data

Setting Method	Teach-In
Housing Material	Stainless steel 316L
Optic Cover	PMMA
Degree of Protection	IP68/IP69K
Connection	M12 x 1; 4/5-pin
Ecolab	yes
FDA compliant	yes

##### Safety-relevant Data

MTTFd (EN ISO 13849-1)	502,44 a
Error Output	●
Analog Output	●
IO-Link	●
Acceleration sensor	●
Connection Diagram No.	241
Control Panel No.	II7
Suitable Connection Equipment No.	2   35
Suitable Mounting Technology No.	380



\* Depends on mode, see table 2

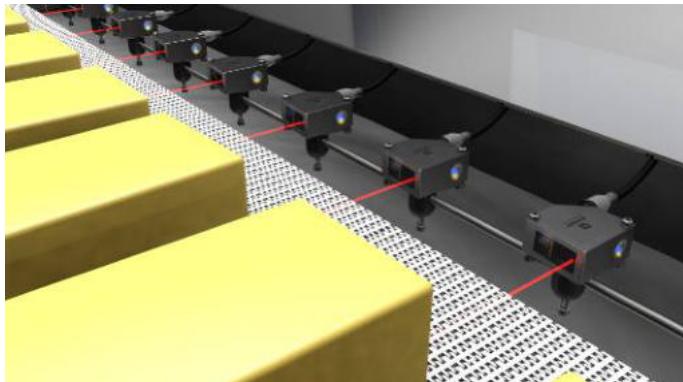


#### Complementary Products

IO-Link Master

Software

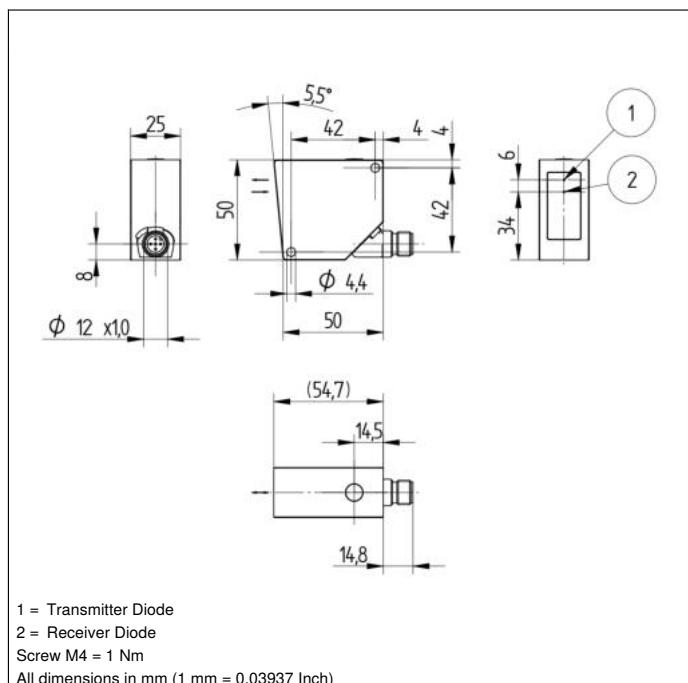
**Ctrl. Panel**
**II7**


06 = Teach Button  
12 = Analog Output Indicator  
5a = Switching Status Display, O1  
68 = supply voltage indicator

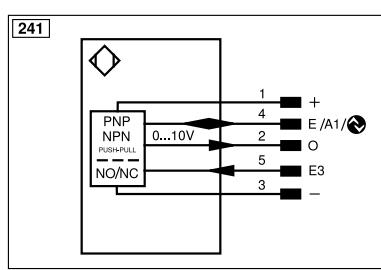

- = supply voltage 0 V  
+ = supply voltage +  
E/A1 = programmable input/output / IO-Link  
E3 = input  
O = analog output

Mode	White working range	Gray working range	Black working range	Measuring rate	Maximum reproducibility	Linearity deviation	Low signal detection
Speed	0...10000 mm	0...9000 mm	0...7000 mm	500/s	5 mm	15 mm	+
Precision (default)	0...10000 mm	0...10000 mm	0...8000 mm	100/s	3 mm	10 mm	++
Precision Plus	0...10000 mm	0...10000 mm	0...8000 mm	50/s	3 mm	10 mm	+++

**Table 2**
**Table 1**

Working Distance	0 m	5 m	10 m
Light Spot Diameter	5 mm	10 mm	15 mm

