

Enabling Switch

S2DF004

Part Number



Technical Data

Electrical Data

Temperature Range	-5..60 °C
-------------------	-----------

Mechanical Data

Housing Material	Plastic
Service Life	1000000 Switching Cycles
Degree of Protection	IP54
Connection	Coil cable, 12-wire, 5 m

Safety-relevant Data

B10d Switching Cycles	100 000
-----------------------	---------

Changeover Contacts	3
---------------------	---

Function

3-stage	yes
---------	-----

Connection Diagram No.	861
------------------------	-----

Control Panel No.	FP2
-------------------	-----

Suitable Mounting Technology No.	840
----------------------------------	-----

- One-hand operation thanks to ergonomic design
- Rubberized enabling switch


The 3-stage enabling switch is very well suited to extensive commissioning or service work thanks to the special design. The ergonomic design prevents fatigue and makes work easier.

Complementary Products


Safety Relay SR4B3B01S, SR4D3B01S

Software

Safety Technology

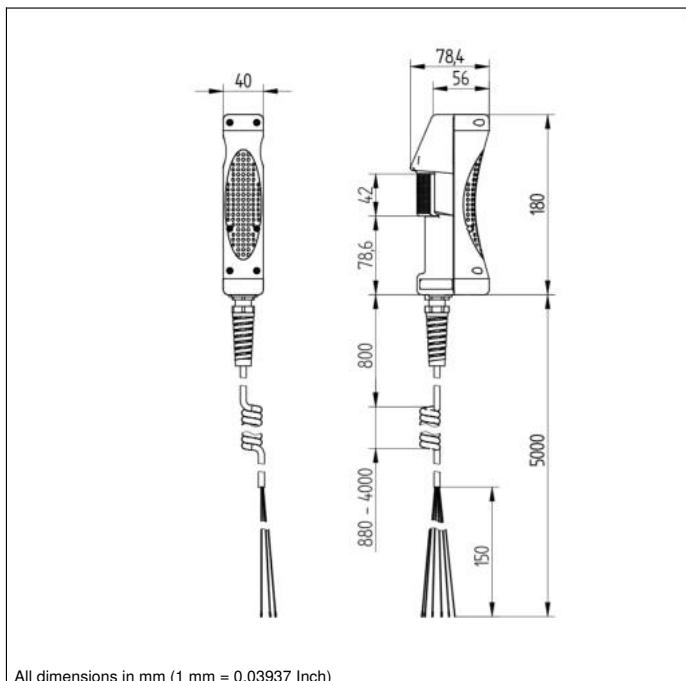

Ctrl. Panel



93 = Confirmation key

