



- Adjustable detection range
- Stainless steel housing

## Technical Data

### Optical Data

|                           |                |
|---------------------------|----------------|
| Range                     | 500 mm         |
| Switching Hysteresis      | < 15 %         |
| Light Source              | Infrared Light |
| Service Life (T = +25 °C) | 100000 h       |
| Max. Ambient Light        | 10000 Lux      |
| Opening Angle             | 12 °           |

### Electrical Data

|                                             |              |
|---------------------------------------------|--------------|
| Supply Voltage                              | 10...30 V DC |
| Current Consumption (U <sub>b</sub> = 24 V) | < 40 mA      |
| Switching Frequency                         | 2 kHz        |
| Response Time                               | 250 µs       |
| Temperature Drift                           | < 10 %       |
| Temperature Range                           | -25...60 °C  |
| Switching Output Voltage Drop               | < 2,5 V      |
| NPN Switching Output/Switching Current      | 100 mA       |
| Residual Current Switching Output           | < 50 µA      |
| Short Circuit Protection                    | yes          |
| Reverse Polarity Protection                 | yes          |
| Overload Protection                         | yes          |
| Protection Class                            | III          |

### Mechanical Data

|                      |                 |
|----------------------|-----------------|
| Setting Method       | Potentiometer   |
| Housing Material     | Stainless Steel |
| Full Encapsulation   | yes             |
| Degree of Protection | IP67            |
| Connection           | M12 × 1; 4-pin  |

NPN NO/NC antivalent



Connection Diagram No.

**301**

Control Panel No.

**D6**


Suitable Connection Equipment No.

**2**

Suitable Mounting Technology No.

**150**

The transmitter and receiver in these sensors are located in a single housing. The sensor evaluates transmitted light reflected back from the object. The output is switched as soon as an object passes the selected range. Bright objects reflect more light than dark objects, and can thus be recognized from greater distances.

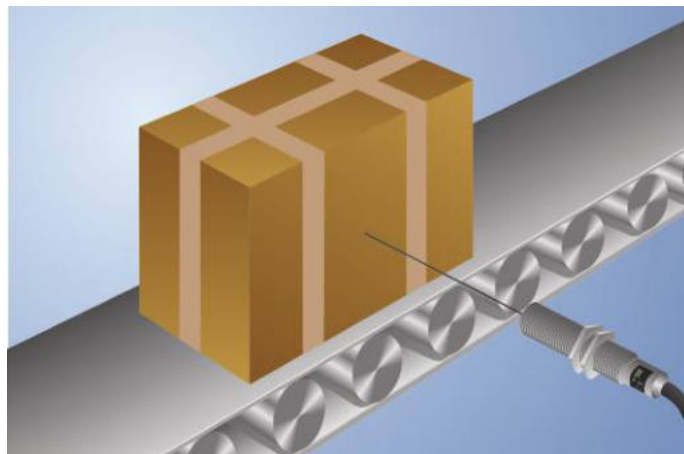

## Complementary Products


Dust Extraction Tube STAUBTUBUS-01

Ctrl. Panel

D6




01 = Switching Status Indicator  
02 = Contamination Warning  
05 = Switching Distance Adjuster

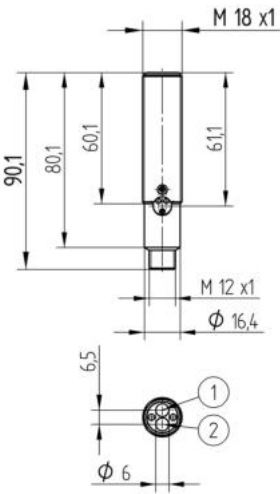

1 = Receiver Diode  
2 = Transmitter Diode  
All dimensions in mm (1 mm = 0.03937 Inch)



301



| Legend    |                                            |           |                                |                                        |                     |
|-----------|--------------------------------------------|-----------|--------------------------------|----------------------------------------|---------------------|
| +         | Supply Voltage +                           | nc        | Not connected                  | ENBRS422                               | Encoder B/B (TTL)   |
| -         | Supply Voltage 0 V                         | U         | Test Input                     | ENA                                    | Encoder A           |
| ~         | Supply Voltage (AC Voltage)                | Ü         | Test Input inverted            | ENB                                    | Encoder B           |
| A         | Switching Output (NO)                      | W         | Trigger Input                  | AMIN                                   | Digital output MIN  |
| Ä         | Switching Output (NC)                      | W-        | Ground for the Trigger Input   | AMAX                                   | Digital output MAX  |
| V         | Contamination/Error Output (NO)            | O         | Analog Output                  | AOK                                    | Digital output OK   |
| Y         | Contamination/Error Output (NC)            | O-        | Ground for the Analog Output   | SY In                                  | Synchronization In  |
| E         | Input (analog or digital)                  | BZ        | Block Discharge                | SY OUT                                 | Synchronization OUT |
| T         | Teach Input                                | Amv       | Valve Output                   | OLT                                    | Brightness output   |
| Z         | Time Delay (activation)                    | a         | Valve Control Output +         | M                                      | Maintenance         |
| S         | Shielding                                  | b         | Valve Control Output 0 V       | rsv                                    | Reserved            |
| RxD       | Interface Receive Path                     | SY        | Synchronization                | Wire Colors according to DIN IEC 60757 |                     |
| TxD       | Interface Send Path                        | SY-       | Ground for the Synchronization | BK                                     | Black               |
| RDY       | Ready                                      | E+        | Receiver-Line                  | BN                                     | Brown               |
| GND       | Ground                                     | S+        | Emitter-Line                   | RD                                     | Red                 |
| CL        | Clock                                      | ±         | Grounding                      | OG                                     | Orange              |
| E/A       | Output/Input programmable                  | SnR       | Switching Distance Reduction   | YE                                     | Yellow              |
| IO-Link   | IO-Link                                    | Rx+/-     | Ethernet Receive Path          | GN                                     | Green               |
| PoE       | Power over Ethernet                        | Tx+/-     | Ethernet Send Path             | BU                                     | Blue                |
| IN        | Safety Input                               | Bus       | Interfaces-Bus A(+)/B(-)       | VT                                     | Violet              |
| OSSD      | Safety Output                              | La        | Emitted Light disengageable    | GY                                     | Grey                |
| Signal    | Signal Output                              | Mag       | Magnet activation              | WH                                     | White               |
| BL_D+/-   | Ethernet Gigabit bidirect. data line (A-D) | RES       | Input confirmation             | PK                                     | Pink                |
| ENo RS422 | Encoder 0-pulse 0/Ü (TTL)                  | EDM       | Contact Monitoring             | GNYE                                   | Green/Yellow        |
| PT        | Platinum measuring resistor                | ENARIS422 | Encoder A/A (TTL)              |                                        |                     |