

Print Mark Reader

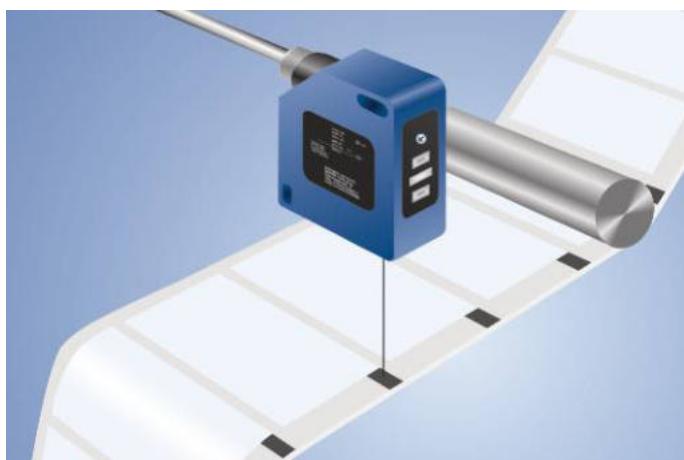
WP04NAT80

Part Number



- Digital read-out of gray-scale values via the RS-232 interface
- Teach-in, dynamic teach-in, external teach-in, RS-232 interface
- Very high contrast resolution
- Very small light spot: 1,4 × 4 mm

These sensors have been specially designed to recognize print marks. They have a very small spot and use a white light LED with long service life. Only one sensor is required for the recognition of all color combinations, as well as the difference in brightness between print marks and the background.



Technical Data

Optical Data

Working Range	30...40 mm
Working Distance	35 mm
Resolution	100 Gray Scale
Switching Hysteresis	< 1 %
Light Source	White Light
Wavelength	400...700 nm
Service Life (T = +25 °C)	100000 h
Max. Ambient Light	10000 Lux
Light Spot Diameter	1,4 × 4 mm

Electrical Data

Supply Voltage	10...30 V
Current Consumption (Ub = 24 V)	< 50 mA
Switching Frequency	25 kHz
Response Time	20 µs
On-/Off-Delay	0...100 ms
Temperature Drift	< 1 %
Temperature Range	-25...60 °C
Number of Switching Outputs	2
Switching Output Voltage Drop	1,5 V
Switching Output/Switching Current	100 mA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Lockable	yes
Teach Mode	ZT, DT, TP
Interface	RS-232
Baud Rate	38400 Bd
Number of Digital Inputs	2
Protection Class	III

Mechanical Data

Setting Method	Teach-In
Housing Material	Plastic
Degree of Protection	IP67
Connection	M12 × 1; 8-pin

Safety-relevant Data

MTTFd (EN ISO 13849-1)	1007,52 a
NPN NO/NC antivalent	●
RS-232 Interface	●
Connection Diagram No.	357
Control Panel No.	P6
Suitable Connection Equipment No.	80
Suitable Mounting Technology No.	380

Complementary Products

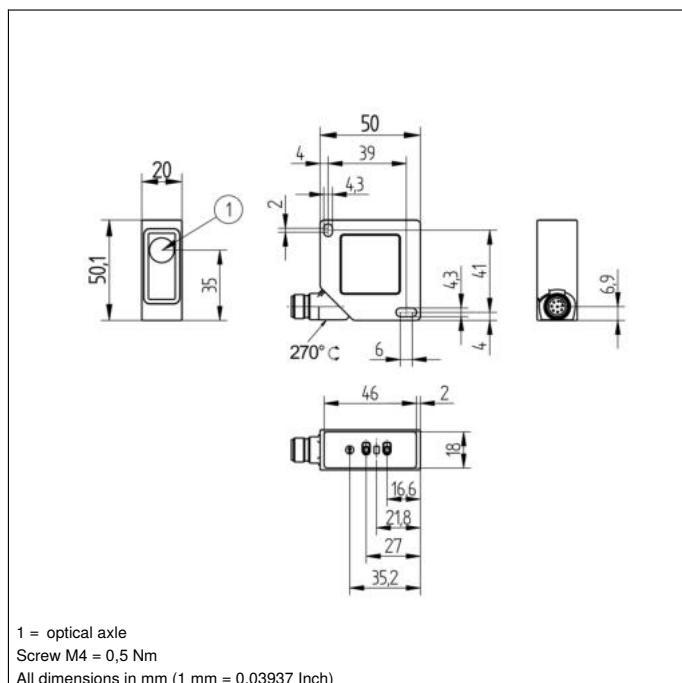
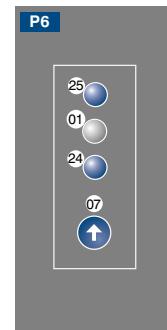
Fieldbus Gateway ZAGxxxN01, EPGG001

Interface Cable S232W3

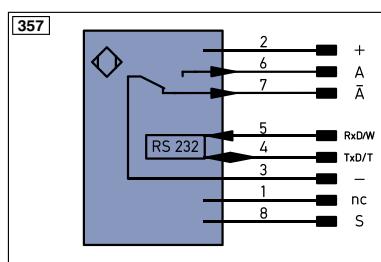
Protective Housing ZSV-0x-01

Set Protective Housing ZSP-NN-02

Software

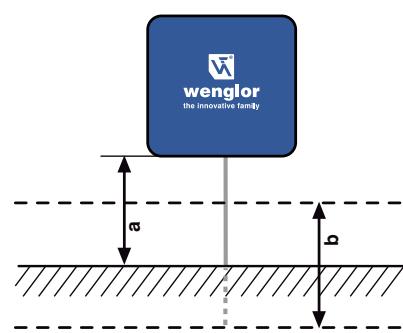

Ctrl. Panel


01 = Switching Status Indicator
07 = Selector Switch
24 = Plus Button
25 = Minus Button


Legend

+	Supply Voltage +	PT	Platinum measuring resistor
-	Supply Voltage 0 V	nc	not connected
~	Supply Voltage (AC Voltage)	U	Test Input
A	Switching Output (NO)	Ü	Test Input inverted
Ā	Switching Output (NC)	W	Trigger Input
V	Contamination/Error Output (NO)	W-	Ground for the Trigger Input
Ā	Contamination/Error Output (NC)	O	Analog Output
E	Input (analog or digital)	O-	Ground for the Analog Output
T	Teach Input	BZ	Block Discharge
Z	Time Delay (activation)	Awv	Valve Output
S	Shielding	a	Valve Control Output +
RxD	Interface Receive Path	b	Valve Control Output 0 V
TxD	Interface Send Path	SY	Synchronization
RDY	Ready	SY-	Ground for the Synchronization
GND	Ground	E+	Receiver-Line
CL	Clock	E-	Emitter-Line
E/A	Output/Input programmable	±	Grounding
IO-Link		SnR	Switching Distance Reduction
PoE	Power over Ethernet	Rx+/-	Ethernet Receive Path
IN	Safety Input	Tx+/-	Ethernet Send Path
SSD	Safety Output	Bus	Interfaces-Bus A(+)/B(-)
Signal	Signal Output	La	Emitted Light disengageable
BLD	Ethernet Gigabit bidirect. data line (A-D)	Mag	Magnet activation
EN _{RS422}	Encoder 0-pulse 0-0 (TTL)	RES	Input confirmation
		EDM	Contactor Monitoring

EN _{RS422}	Encoder A/Ā (TTL)
EN _{BR422}	Encoder B/Ā (TTL)
EN _A	Encoder A
EN _B	Encoder B
AMIN	Digital output MIN
AMAX	Digital output MAX
AOK	Digital output OK
SY IN	Synchronization IN
SY OUT	Synchronization OUT
OLT	Brightness output
M	Maintenance
rsv	reserved
Wire Colors according to DIN IEC 757	
BK	Black
BN	Brown
RD	Red
OG	Orange
YE	Yellow
GN	Green
BU	Blue
VT	Violet
GY	Grey
WH	White
PK	Pink
GNYE	Green/Yellow

Ideal Working Distance


a = Working Distance
b = Working Range

