

# Laser Distance Sensor

## Long-Range

# Y1TA100QXT3


## LASER

Part Number



- 2 mutually independent switching outputs
- Graphical display for easy operation
- Switching output A1 as analog output switchable (0...10 V/4...20 mA)
- Temperature drift eliminable

These sensors have scratch-resistant optics and the emitted light can be switched off. They use the transit time measurement principle to measure the distance between the sensor and the object. For this reason, the object's color, shape and surface characteristics have practically no influence on measurement results. Even dark objects can be reliably recognized.

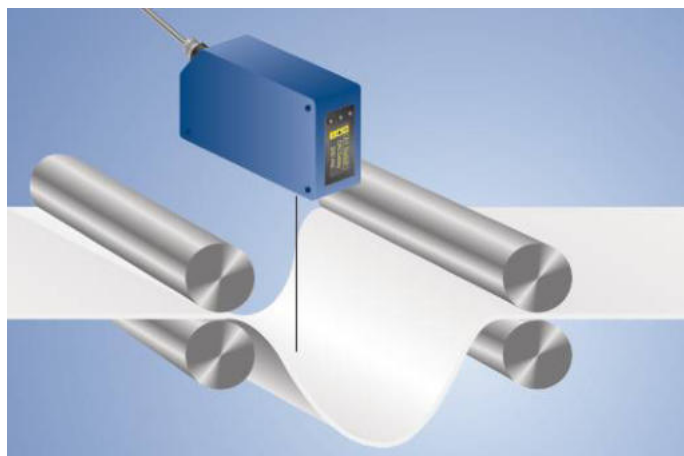

### Technical Data

#### Optical Data

|                           |              |
|---------------------------|--------------|
| Working Range             | 0,1...10,1 m |
| Measuring Range           | 10 m         |
| Resolution                | 1...12 mm    |
| Linearity                 | 0,5 %        |
| Linearity Deviation       | 50 mm        |
| Switching Hysteresis      | 3...20 mm    |
| Light Source              | Laser (red)  |
| Wavelength                | 660 nm       |
| Service Life (T = +25 °C) | 100000 h     |
| Laser Class (EN 60825-1)  | 2            |
| Max. Ambient Light        | 10000 Lux    |
| Beam Divergence           | < 2 mrad     |
| Light Spot Diameter       | see Table 1  |

#### Electrical Data

|                                                                     |              |
|---------------------------------------------------------------------|--------------|
| Supply Voltage                                                      | 18...30 V DC |
| Current Consumption (U <sub>b</sub> = 24 V)                         | < 100 mA     |
| Switching Frequency                                                 | 50 Hz        |
| Measuring Rate                                                      | 1...100 /s   |
| Response Time                                                       | 10...200 ms  |
| On-/Off-Delay                                                       | 0...10000 ms |
| Temperature Drift (-10 °C < T <sub>u</sub> < 50 °C)                 | < 0,2 mm/K   |
| Temperature Drift (T <sub>u</sub> < -10 °C, T <sub>u</sub> > 50 °C) | < 0,4 mm/K   |
| Temperature Range                                                   | -25...60 °C  |
| Number of Switching Outputs                                         | 2            |
| Switching Output Voltage Drop                                       | < 2,5 V      |
| Switching Output/Switching Current                                  | 200 mA       |
| Analog Output                                                       | 0...10 V     |
| Short Circuit Protection                                            | yes          |
| Reverse Polarity and Overload Protection                            | yes          |
| Protection Class                                                    | III          |
| FDA Accession Number                                                | 0710891-002  |

#### Mechanical Data

|                      |                |
|----------------------|----------------|
| Setting Method       | Menu (OLED)    |
| Housing Material     | Plastic        |
| Degree of Protection | IP68           |
| Connection           | M12 × 1; 4-pin |


#### Safety-relevant Data

|                                   |          |
|-----------------------------------|----------|
| MTTFd (EN ISO 13849-1)            | 346,68 a |
| Error Output                      | ●        |
| PNP NO                            | ●        |
| Configurable as PNP/NPN/Push-Pull | ●        |
| Analog Output                     | ●        |
| Connection Diagram No.            | 755      |
| Control Panel No.                 | TA1      |
| Suitable Connection Equipment No. | 2        |
| Suitable Mounting Technology No.  | 340      |


Display brightness may decrease with age. This does not result in any impairment of the sensor function.

### Complementary Products


|                                  |
|----------------------------------|
| Analog Evaluation Unit AW02      |
| Set Protective Housing ZST-NN-02 |

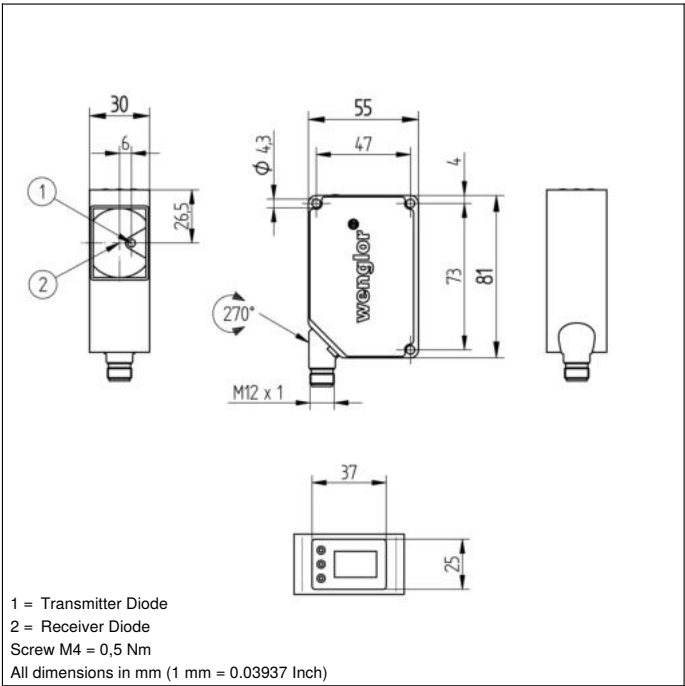

### Ctrl. Panel



21 = Mode Button  
60 = display

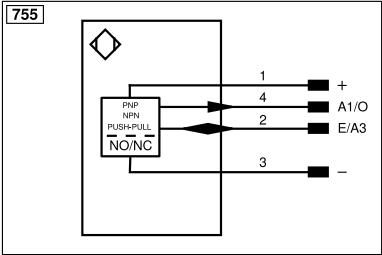

| Legend                                 |                                            |         |                                |
|----------------------------------------|--------------------------------------------|---------|--------------------------------|
| +                                      | Supply Voltage +                           | nc      | Not connected                  |
| -                                      | Supply Voltage 0 V                         | U       | Test Input                     |
| ~                                      | Supply Voltage (AC Voltage)                | Ū       | Test Input inverted            |
| A                                      | Switching Output (NO)                      | W       | Trigger Input                  |
| Ā                                      | Switching Output (NC)                      | W-      | Ground for the Trigger Input   |
| V                                      | Contamination/Error Output (NO)            | O       | Analog Output                  |
| Ȳ                                      | Contamination/Error Output (NC)            | O-      | Ground for the Analog Output   |
| E                                      | Input (analog or digital)                  | BZ      | Block Discharge                |
| T                                      | Teach Input                                | Amv     | Valve Output                   |
| Z                                      | Time Delay (activation)                    | a       | Valve Control Output +         |
| S                                      | Shielding                                  | b       | Valve Control Output 0 V       |
| RxD                                    | Interface Receive Path                     | SY      | Synchronization                |
| TxD                                    | Interface Send Path                        | SY-     | Ground for the Synchronization |
| RDY                                    | Ready                                      | E+      | Receiver-Line                  |
| GND                                    | Ground                                     | S+      | Emitter-Line                   |
| CL                                     | Clock                                      | ⊕       | Grounding                      |
| E/A                                    | Output/Input programmable                  | SnR     | Switching Distance Reduction   |
| IO-Link                                | IO-Link                                    | Rx+/-   | Ethernet Receive Path          |
| PoE                                    | Power over Ethernet                        | Tx+/-   | Ethernet Send Path             |
| IN                                     | Safety Input                               | Bus     | Interfaces-Bus A(+)/B(-)       |
| OSSD                                   | Safety Output                              | La      | Emitted Light disengageable    |
| Signal                                 | Signal Output                              | Mag     | Magnet activation              |
| BL_D+/-                                | Ethernet Gigabit bidirect. data line (A-D) | RES     | Input confirmation             |
| ENo RS422                              | Encoder 0-pulse 0/0 (TTL)                  | EDM     | Contact Monitoring             |
| PT                                     | Platinum measuring resistor                | ENAR422 | Encoder A/A (TTL)              |
| ENBR422                                | Encoder B/B (TTL)                          | ENA     | Encoder A                      |
| ENB                                    | Encoder B                                  | AMIN    | Digital output MIN             |
| AMAX                                   | Digital output MAX                         | AOK     | Digital output OK              |
| SY In                                  | Synchronization In                         | SY OUT  | Synchronization OUT            |
| OLT                                    | Brightness output                          | M       | Maintenance                    |
| rsv                                    | Reserved                                   |         |                                |
| Wire Colors according to DIN IEC 60757 |                                            |         |                                |
| BK                                     | Black                                      |         |                                |
| BN                                     | Brown                                      |         |                                |
| RD                                     | Red                                        |         |                                |
| OG                                     | Orange                                     |         |                                |
| YE                                     | Yellow                                     |         |                                |
| GN                                     | Green                                      |         |                                |
| BU                                     | Blue                                       |         |                                |
| VT                                     | Violet                                     |         |                                |
| GY                                     | Grey                                       |         |                                |
| WH                                     | White                                      |         |                                |
| PK                                     | Pink                                       |         |                                |
| GNYE                                   | Green/Yellow                               |         |                                |

Table 1

| Working Distance    | 0 m  | 10 m    |
|---------------------|------|---------|
| Light Spot Diameter | 5 mm | < 20 mm |

