

Connection Box
for FIS-0830/FIS-0870/FIS-680x

ZAA12NN01


Part Number



Technical Data

Electrical Data	
Supply Voltage	18...28 V DC
Mechanical Data	
Degree of Protection	IP65
Packaging unit	1 Piece
Connection Table No.	40
Suitable Connection Equipment No.	12

- Protection mode IP65

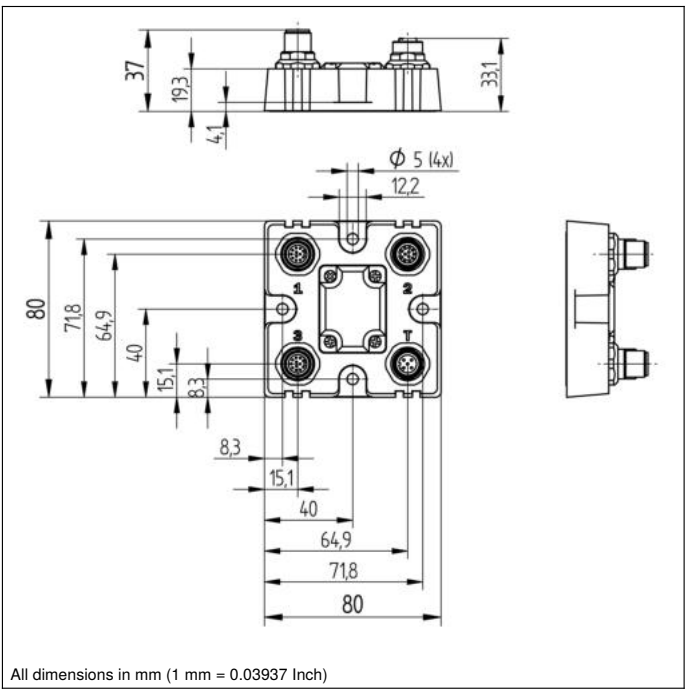


Connector 1,2,3


PIN	Signal	In/Out
1	Trigger	In
2	Power	
3	Default	
4	New Master	
5	Output 1	Out
6	Output 3	Out
7	Ground	
8	Input Commen	
9	Receive Data (RS-232)	In
10	Transmit Data (RS-232)	Out
11	Output 2	Out
12	Output Commen	Out

Connector T


PIN	Signal
1	Power 10...28 V DC
2	Trigger/New Master/Input 1 Commen
3	Ground
4	Trigger

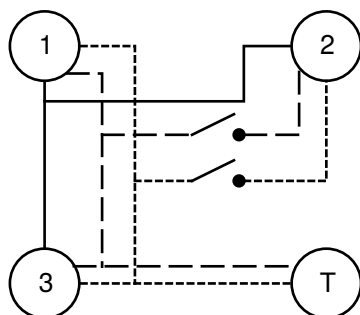

— COMM-I/O - - - - TRIGGER
- - - - POWER



1, 2, 3



T