

XMEP5K0PT130

Electronic pressure sensors, Pressure sensors
XM, transmitter, XMEP, 5000 PSI, 1/4"18NPT,
0,5...4,5 V, Deutsch, set 1



Main

| | |
|---------------------------|--|
| Range of product | Telemecanique Pressure sensors XM |
| Product or component type | Electronic pressure sensors |
| Pressure sensor type | Pressure transmitter |
| Pressure sensor name | XMEP |
| Electrical circuit type | Control circuit |
| Pressure rating | 34473.8 kPa |
| Local display | Without |
| Controlled fluid | Fresh water (0...125 °C) Air (-40...125 °C) Hydraulic oil (-40...125 °C) |
| Fluid connection type | 1/4" - 18 NPT (male) |
| Electrical connection | DEUTSCH connector DT04-3P 3 pins |
| [Us] rated supply voltage | 5 V DC SELV (voltage limits: 4.5...5.5 V) |
| Current consumption | < 7 mA |
| Type of output signal | Analogue |
| Analogue output function | 0.5...4.5 V, 3-wire |
| Quantity per set | Set of 1 |
| Type of packing | Individual |

Complementary

| | |
|---|---|
| Pressure setting range | 0.00...34473.78 kPa |
| Maximum permissible accidental pressure | 103421.36 kPa |
| Destruction pressure | 206842.71 kPa |
| Materials in contact with fluid | Stainless steel AISI 316L |
| Operating position | Any position |
| Protection type | Reverse polarity Load short-circuit |
| Electromagnetic compatibility | Electrostatic discharge immunity test conforming to ISO 10605 criteria A 15 kV air, 15 kV contact Susceptibility to electromagnetic fields conforming to ISO 11452-2 criteria A 100 V/m 200...2000 MHz Susceptibility to electromagnetic fields conforming to ISO 11452-4 criteria A 100 mA 20...400 MHz Susceptibility to conducted disturbances conforming to EN/IEC 61000-4-6 criteria A 30 V 0.15...80 MHz Electrical fast transient/burst immunity test conforming to EN/IEC 61000-4-4 criteria A 4 kV Susceptibility to conducted transient disturbances conforming to ISO 7637-2 criteria B level 3 |
| [Uiimp] rated impulse withstand voltage | 0.5 kV |
| Response time on output | <= 2 ms 10...90 % of full scale |
| Measurement accuracy | +/- 0.5 % of the measuring range |
| Resolution | 0.1 % of the measuring range |
| Drift of the sensitivity | +/- 0.02 % of measuring range/°K |
| Drift of the zero point | +/- 0.02 % of measuring range/°K |
| Long term stability | +/- 0.5 % of the measuring range |
| Mechanical durability | 10000000 cycles |
| Net weight | 0.098 kg |

| | |
|----------|---------|
| Diameter | 26 mm |
| Length | 63.4 mm |

Environment

| | |
|---------------------------------------|--|
| Standards | UL 61010-1 ECE 10R-5 ISO 14982 EN/IEC 61326-2-3 ISO 13766 EN 13309 |
| Product certifications | CE[RETURN]E2[RETURN]cULus |
| Ambient air temperature for operation | -40...100 °C |
| Ambient air temperature for storage | -50...100 °C |
| Vibration resistance | 12 gn sinus (f = 20...520 Hz) test 4 conforming to ISO 16750-3 18 gn random (f = 10...2000 Hz) test 4 conforming to ISO 16750-3 |
| Shock resistance | 50 gn for 11 ms conforming to EN/IEC 60068-2-27 |
| IP degree of protection | IP65 conforming to EN/IEC 60529 IP67 conforming to EN/IEC 60529 IP69K conforming to EN/IEC 60529 |


Packing Units

| | |
|------------------------------|---------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 4.32 cm |
| Package 1 Width | 4.83 cm |
| Package 1 Length | 8.64 cm |
| Package 1 Weight | 0.1 kg |

Offer Sustainability

| | |
|--|---|
| Sustainable offer status | Green Premium product |
| Circularity Profile | No need of specific recycling operations |
| California proposition 65 | WARNING: This product can expose you to chemicals including: Diisobutyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |
| For all Reach Rohs enquiries contact us at | sustainability@tesensors.com |


Dimensions

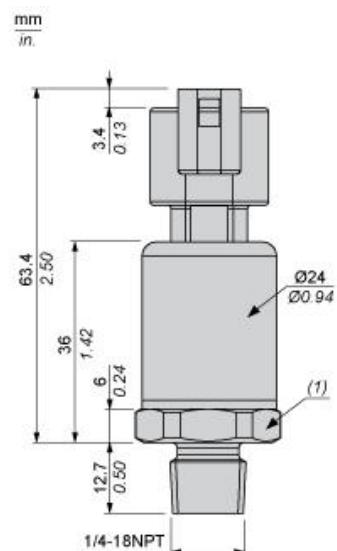

(1) SW24, tightening torque 24 N·m / 212 lb-in

Connections and Schema

Connector Wiring



(1) V out

Performance Curves

Curves

