

# XS218BLPAM12

inductive sensor XS2 M18, L64mm, brass,  
Sn8mm, 12..24VDC, M12



## Main

|                               |                                                      |
|-------------------------------|------------------------------------------------------|
| Range of product              | Telemecanique Inductive proximity sensors XS         |
| Series name                   | General purpose                                      |
| Sensor type                   | Inductive proximity sensor                           |
| Sensor name                   | XS2                                                  |
| Sensor design                 | Cylindrical M18                                      |
| Size                          | 64 mm                                                |
| Body type                     | Fixed                                                |
| Enclosure material            | Nickel plated brass                                  |
| Type of output signal         | Discrete                                             |
| Wiring technique              | 3-wire                                               |
| [Sn] nominal sensing distance | 8 mm                                                 |
| Discrete output function      | 1 NO                                                 |
| Discrete output type          | PNP                                                  |
| Electrical connection         | Male connector M12, 4 pins                           |
| [Us] rated supply voltage     | 12...24 V DC with reverse polarity protection        |
| Switching capacity in mA      | <= 200 mA with overload and short-circuit protection |
| IP degree of protection       | IP67 conforming to IEC 60529                         |

## Complementary

|                                    |                              |
|------------------------------------|------------------------------|
| ISO thread                         | M18 x 1                      |
| Detection face                     | Frontal                      |
| Detector flush mounting acceptance | Non flush mountable          |
| Material                           | Metal                        |
| Front material                     | PBT                          |
| Operating zone                     | 0...6.4 mm                   |
| Differential travel                | 1...15% of Sr                |
| Output circuit type                | DC                           |
| Status LED                         | Output state: 1 LED (yellow) |
| Supply voltage limits              | 10...36 V DC                 |
| Switching frequency                | <= 500 Hz                    |
| Maximum voltage drop               | <2 V (closed)                |
| Current consumption                | <= 10 mA no-load             |
| Maximum delay first up             | 15 ms                        |
| Maximum delay response             | 0.1 ms                       |
| Maximum delay recovery             | 1 ms                         |
| Marking                            | CE                           |
| Threaded length                    | 35 mm                        |
| Length                             | 64 mm                        |
| Net weight                         | 0.035 kg                     |

The information provided in this documentation contains general descriptions and/or technical characteristics of the products of the company mentioned herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither TWSS Holding nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Environment

|                                       |                                                                         |
|---------------------------------------|-------------------------------------------------------------------------|
| Product certifications                | CSA[RETURN]UL                                                           |
| Ambient air temperature for operation | -25...70 °C                                                             |
| Ambient air temperature for storage   | -40...85 °C                                                             |
| Vibration resistance                  | 25 gn amplitude = +/- 2 mm (f = 10...55 Hz) conforming to IEC 60068-2-6 |
| Shock resistance                      | 50 gn for 11 ms conforming to IEC 60068-2-27                            |

## Packing Units

|                              |           |
|------------------------------|-----------|
| Unit Type of Package 1       | PCE       |
| Number of Units in Package 1 | 1         |
| Package 1 Height             | 2.700 cm  |
| Package 1 Width              | 6.000 cm  |
| Package 1 Length             | 9.900 cm  |
| Package 1 Weight             | 63.000 g  |
| Unit Type of Package 2       | S02       |
| Number of Units in Package 2 | 48        |
| Package 2 Height             | 15.000 cm |
| Package 2 Width              | 30.000 cm |
| Package 2 Length             | 40.000 cm |
| Package 2 Weight             | 3.504 kg  |


## Offer Sustainability

|                                            |                                                                                                                                                                                                                                                                                                                                                                                   |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sustainable offer status                   | Green Premium product                                                                                                                                                                                                                                                                                                                                                             |
| Circularity Profile                        |  <a href="#">End of Life Information</a>                                                                                                                                                                                                                                                       |
| California proposition 65                  | WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> |
| For all Reach Rohs enquiries contact us at | <a href="mailto:sustainability@tesensors.com">sustainability@tesensors.com</a>                                                                                                                                                                                                                                                                                                    |

## Contractual warranty


|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

## Dimensions

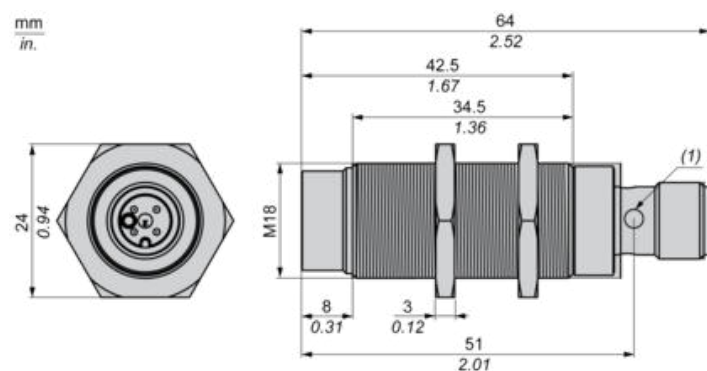


## Minimum Mounting Distances

Side by side




$e (1) \geq 32 \text{ mm}/1.26 \text{ in.}$

Face to face




$e (2) \geq 96 \text{ mm}/3.78 \text{ in.}$

Facing a metal object



$e (3) \geq 24 \text{ mm}/0.94 \text{ in.}$

Mounted in a metal support



$d \geq 56 \text{ mm}/2.20 \text{ in.}$


$h \geq 16 \text{ mm}/0.63 \text{ in.}$

---


## Wiring Schemes

---

M12 connector



PNP



1 : (+)

2 : Not connected

3 : (-)


4 : NO Output

---

Performance Curves

---

Standard Steel Target : 24x24x1 mm

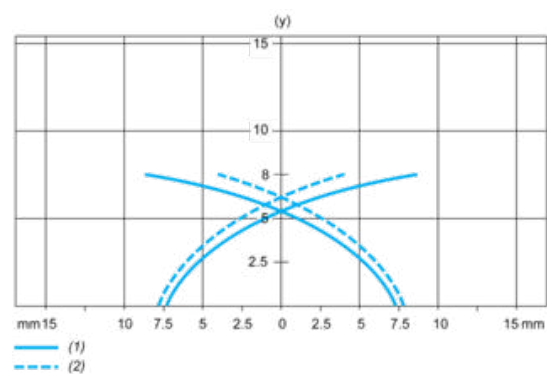

(1) Pick-up points

(2) Drop-out points (object approaching from the side)

(y) Sensing distance in mm