

Inductive sensor XS4 M12, L52mm, PPS,  
Sn4mm, 24...240VAC/DC, cable 2 m



**Main**

Size	52 mm
[Sn] nominal sensing distance	4 mm
Electrical connection	Cable
[Us] rated supply voltage	24...240 V AC/DC 50/60 Hz
Switching capacity in mA	5...200 mA AC/DC
IP degree of protection	IP68 double insulation conforming to IEC 60529

**Complementary**

Front material	PPS
Status LED	Output state: 1 LED (yellow)
Supply voltage limits	20...264 V AC/DC
Maximum residual current	0.6 mA open state
Switching frequency	<= 25 Hz AC <= 3000 Hz DC
Maximum voltage drop	<5.5 V (closed)
Marking	CE
Threaded length	42 mm
Length	52 mm

**Environment**

Product certifications	CSA[RETURN]Ecolab[RETURN]UL
Vibration resistance	25 gn amplitude = +/- 2 mm (f = 10...55 Hz) conforming to IEC 60068-2-6
Shock resistance	50 gn for 11 ms conforming to IEC 60068-2-27

**Packing Units**

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4.200 cm
Package 1 Width	13.000 cm
Package 1 Length	9.600 cm
Package 1 Weight	62.000 g
Unit Type of Package 2	S03
Number of Units in Package 2	44
Package 2 Height	30 cm
Package 2 Width	30 cm
Package 2 Length	40 cm
Package 2 Weight	3.223 kg

## Offer Sustainability

Sustainable offer status	Green Premium product
Circularity Profile	 <a href="#">End of Life Information</a>
California proposition 65	WARNING: This product can expose you to chemicals including: Diisobutyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
For all Reach Rohs enquiries contact us at	<a href="mailto:sustainability@tesensors.com">sustainability@tesensors.com</a>


## Contractual warranty

Warranty	18 months
----------	-----------

---

Dimensions

---

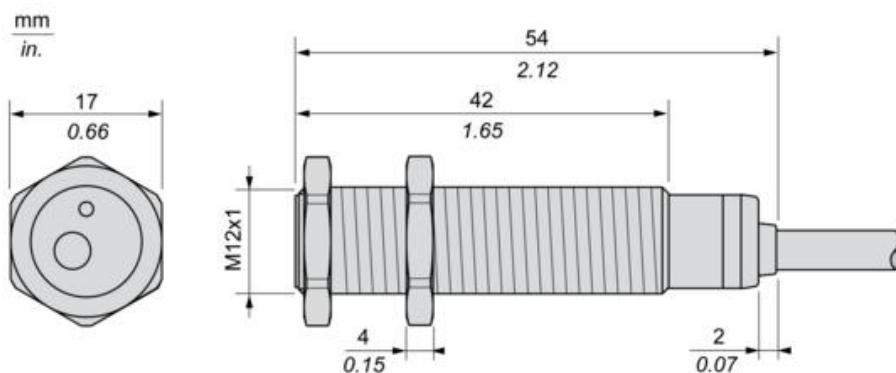


---

### Minimum Mounting Distances


---

Side by side

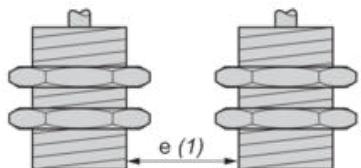


$e (1) \geq 16 \text{ mm/0.63 in.}$

Face to face

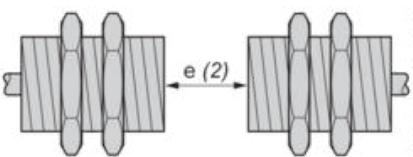


$e (2) \geq 48 \text{ mm/1.89 in.}$

Facing a metal object

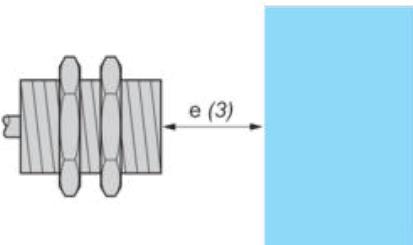

$e (3) \geq 12 \text{ mm/0.47 in.}$

Mounted in a metal support

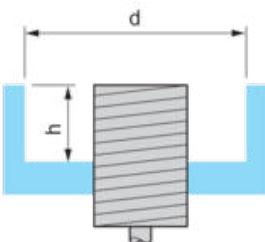


$d \geq 36 \text{ mm/1.42 in.}$

$h \geq 8 \text{ mm/0.31 in.}$

---

### Mounting

---

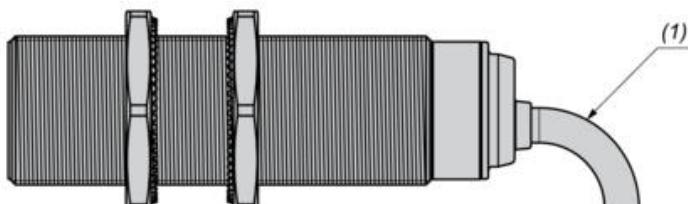

$(1)$  Bending cable:  $4 \times$  external cable diameter


---

### Wiring Schemes

---

#### 2-Wire AC or DC

NO output

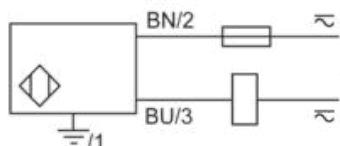

BU : Blue


BN : Brown

---

Performance Curves

---

Standard Steel Target : 12x12x1 mm

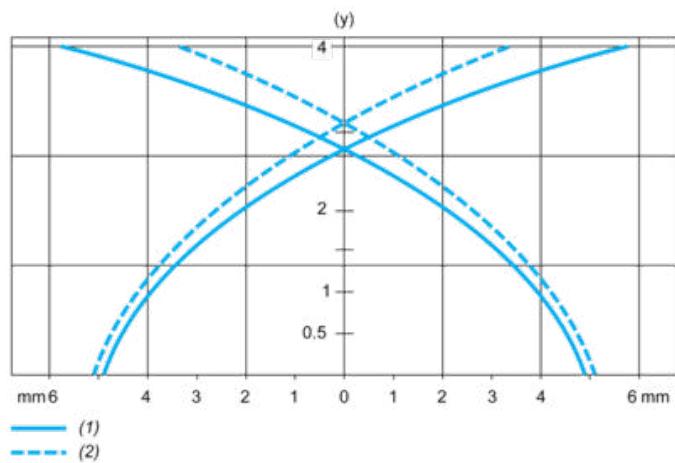

- (1) Pick-up points
- (2) Drop-out points (object approaching from the side)
- (y) Sensing distance in mm