

# XS4P30PB340D

Inductive proximity sensors XS, inductive sensor XS4 M30, L50mm, PPS, Sn15mm, 12...24 VDC, M12



## Main

|                                    |                                                         |
|------------------------------------|---------------------------------------------------------|
| Range of product                   | Telemecanique Inductive proximity sensors XS            |
| Series name                        | General purpose                                         |
| Sensor type                        | Inductive proximity sensor                              |
| Sensor name                        | XS4                                                     |
| Sensor design                      | Cylindrical M30                                         |
| Size                               | 50 mm                                                   |
| Body type                          | Fixed                                                   |
| Detector flush mounting acceptance | Non flush mountable                                     |
| Material                           | Plastic                                                 |
| Type of output signal              | Discrete                                                |
| Wiring technique                   | 3-wire                                                  |
| [Sn] nominal sensing distance      | 15 mm                                                   |
| Discrete output function           | 1 NC                                                    |
| Output circuit type                | DC                                                      |
| Discrete output type               | PNP                                                     |
| Electrical connection              | Male connector M12, 4 pins                              |
| [Us] rated supply voltage          | 12...24 V DC with reverse polarity protection           |
| Switching capacity in mA           | <= 200 mA DC with overload and short-circuit protection |
| IP degree of protection            | IP67 conforming to IEC 60529                            |

## Complementary

|                        |                              |
|------------------------|------------------------------|
| Thread type            | M30 x 1.5                    |
| Detection face         | Frontal                      |
| Front material         | PPS                          |
| Enclosure material     | PPS                          |
| Operating zone         | 0...12 mm                    |
| Differential travel    | 1...15% of Sr                |
| Status LED             | Output state: 1 LED (yellow) |
| Supply voltage limits  | 10...36 V DC                 |
| Switching frequency    | <= 1000 Hz                   |
| Maximum voltage drop   | <2 V (closed)                |
| Current consumption    | <= 10 mA no-load             |
| Maximum delay first up | 10 ms                        |
| Maximum delay response | 0.3 ms                       |
| Maximum delay recovery | 0.7 ms                       |
| Marking                | CE                           |
| Threaded length        | 34 mm                        |
| Height                 | 30 mm                        |
| Length                 | 50 mm                        |
| Net weight             | 0.12 kg                      |

## Environment

|                                       |                                                                         |
|---------------------------------------|-------------------------------------------------------------------------|
| Product certifications                | UL[RETURN]CSA                                                           |
| Ambient air temperature for operation | -25...70 °C                                                             |
| Ambient air temperature for storage   | -40...85 °C                                                             |
| Vibration resistance                  | 25 gn amplitude = +/- 2 mm (f = 10...55 Hz) conforming to IEC 60068-2-6 |
| Shock resistance                      | 50 gn for 11 ms conforming to IEC 60068-2-27                            |

## Packing Units

|                              |         |
|------------------------------|---------|
| Unit Type of Package 1       | PCE     |
| Number of Units in Package 1 | 1       |
| Package 1 Height             | 4.5 cm  |
| Package 1 Width              | 8.0 cm  |
| Package 1 Length             | 14.8 cm |
| Package 1 Weight             | 145.0 g |


## Offer Sustainability

|                                            |                                                                                                                                                                                                                                                                                                                                                                                   |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sustainable offer status                   | Green Premium product                                                                                                                                                                                                                                                                                                                                                             |
| Circularity Profile                        |  <a href="#">End of Life Information</a>                                                                                                                                                                                                                                                         |
| California proposition 65                  | WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> |
| For all Reach Rohs enquiries contact us at | <a href="mailto:sustainability@tesensors.com">sustainability@tesensors.com</a>                                                                                                                                                                                                                                                                                                    |

## Contractual warranty


|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Dimensions

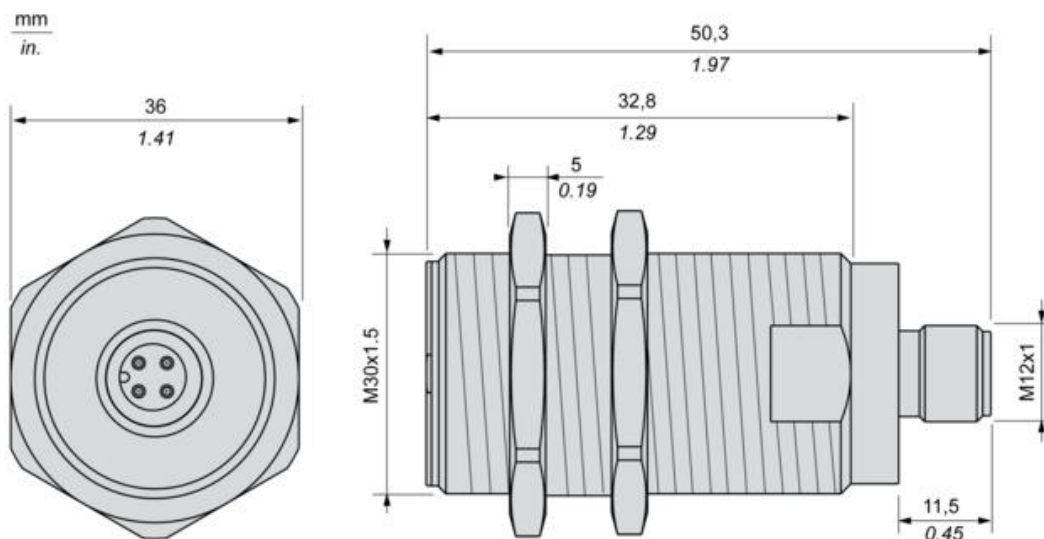


## Minimum Mounting Distances

Side by side

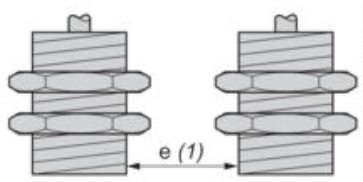


$e (1) \geq 60 \text{ mm}/2.36 \text{ in.}$

Face to face

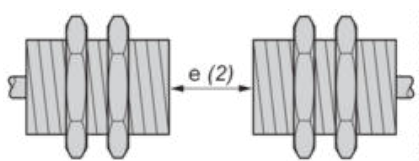


$e (2) \geq 180 \text{ mm}/7.09 \text{ in.}$

Facing a metal object

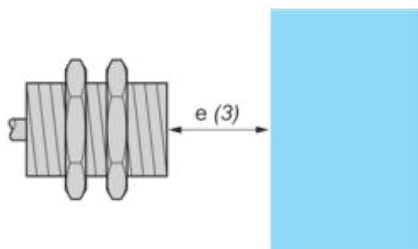

$e (3) \geq 45 \text{ mm}/1.77 \text{ in.}$

Mounted in a metal support



$d \geq 90 \text{ mm}/3.54 \text{ in.}$


$h \geq 30 \text{ mm}/1.18 \text{ in.}$

---


## Wiring Schemes

---

M12 connector



PNP

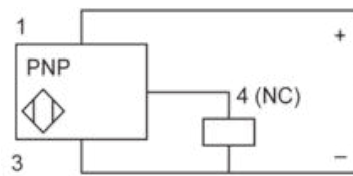

1 : (+)

2 : NC Output

3 : (-)


4 : Not connected

---

Performance Curves

---

Standard Steel Target : 45x45x1 mm

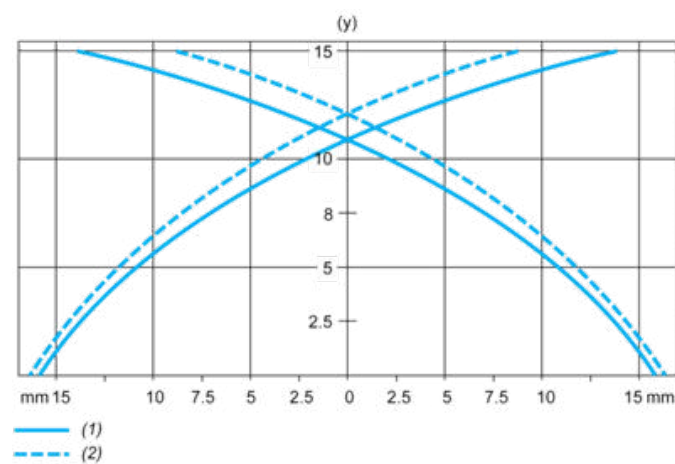

(1) Pick-up points

(2) Drop-out points (object approaching from the side)

(y) Sensing distance in mm