

XUK8ARCTL2

Photoelectric sensors XU, XUK, BGS, Sn 0.7
m, 24...240VAC/DC, cable 2 m

Main

| | |
|-------------------------------|--|
| Range of product | Telemecanique Photoelectric sensors XU |
| Series name | General purpose single mode |
| Electronic sensor type | Photo-electric sensor |
| Sensor name | XUK |
| Sensor design | Compact 50 x 50 |
| Detection system | Diffuse with background suppression |
| Material | Plastic |
| Type of output signal | Discrete |
| Supply circuit type | AC/DC |
| Wiring technique | 5-wire |
| Discrete output function | 1 C/O |
| Electrical connection | Cable |
| Cable length | 2 m |
| Product specific application | - |
| Emission | Infrared diffuse with background suppression |
| [Sn] nominal sensing distance | 0.75 m diffuse with background suppression |

Complementary

| | |
|--------------------------------|---|
| Enclosure material | PBT |
| Lens material | PMMA |
| Maximum sensing distance | 0.75 m diffuse with background suppression |
| Output type | Relay |
| Cable composition | 5 x 0.34 mm ² |
| Wire insulation material | PVC |
| Cable outer diameter | 6 mm |
| Status LED | 1 LED (green) for supply on 1 LED (yellow) for output state |
| [Us] rated supply voltage | 24...240 V AC/DC |
| Supply voltage limits | 20...264 V AC 20...264 V DC |
| Switching capacity in mA | 3 A (cos φ = 1 for 0.5 million cycles at 1 operating cycle per second at 250 V) |
| Switching frequency | <= 20 Hz |
| Maximum voltage drop | <1.5 V (closed state) |
| Current consumption | <= 35 mA no-load |
| Maximum power consumption in W | 2 W AC |
| Maximum delay first up | 60 ms |
| Maximum delay response | 25 ms |
| Maximum delay recovery | 25 ms |
| Setting-up | Self teaching |
| Electrical durability | 500000 cycles, cos f = 1, operating rate <60 cyc/mn at 250 V |
| Depth | 50 mm |
| Height | 50 mm |
| Width | 18 mm |
| Net weight | 0.15 kg |

Environment

| | |
|---------------------------------------|--|
| Product certifications | CE[RETURN]Ecolab |
| Ambient air temperature for operation | -20...60 °C |
| Ambient air temperature for storage | -30...70 °C |
| Vibration resistance | 7 gn (f = 10...55 Hz) conforming to IEC 60068-2-6 |
| Shock resistance | 30 gn (duration = 11 ms) conforming to IEC 60947-5-2 |
| IP degree of protection | IP65 double insulation conforming to IEC 60529 |

Packing Units

| | |
|------------------------------|---------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 4.0 cm |
| Package 1 Width | 9.5 cm |
| Package 1 Length | 13.2 cm |
| Package 1 Weight | 181.0 g |
| Unit Type of Package 2 | S02 |
| Number of Units in Package 2 | 22 |
| Package 2 Height | 15.0 cm |
| Package 2 Width | 30.0 cm |
| Package 2 Length | 40.0 cm |
| Package 2 Weight | 4.46 kg |


Offer Sustainability

| | |
|--|---|
| California proposition 65 | WARNING: This product can expose you to chemicals including: Diisobutyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |
| For all Reach Rohs enquiries contact us at | sustainability@tesensors.com |


Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Dimensions

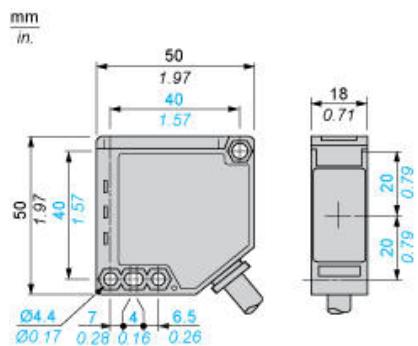


With cover open

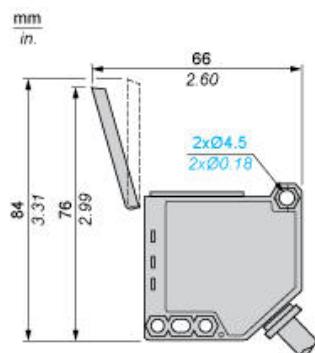

Connections and Schemes

Cable Connection, Relay Output

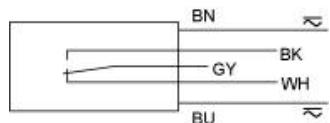

AC/ BN (Blue)

DC :

AC/ BN (Brown)

DC :

RelayGY (Grey)

common :


NO : BK (Black), detection of object

NC : WH (White), detection of object absence


Detection Curves

Variation of Usable Sensing Distance Su

Adjustment at 10 cm

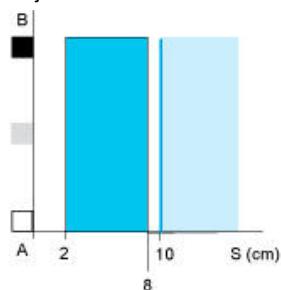


Adjustment at 1 m

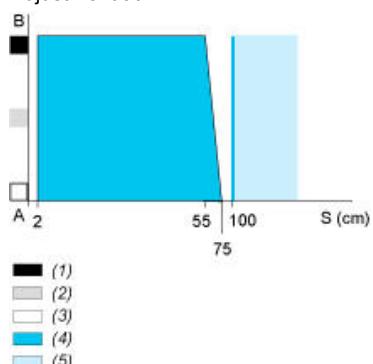

A-B : Object reflection coefficient

- (1) Black 6%
- (2) Grey 18%
- (3) White 90%
- (4) Sensing range
- (5) Non sensing zone (matt surfaces)

Detection Curves

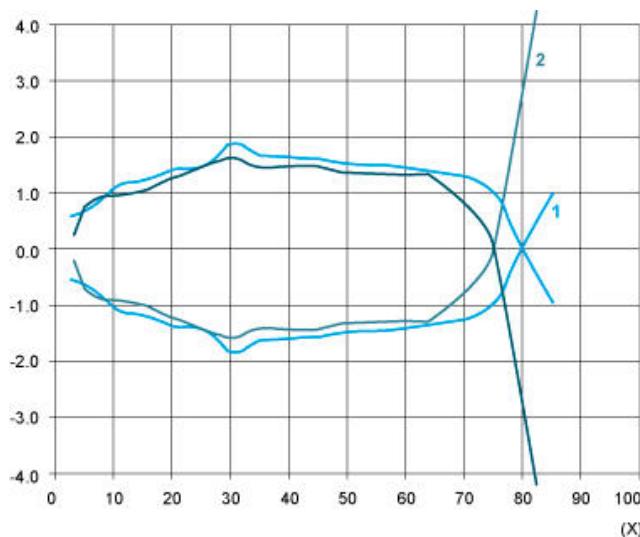


1 : White 90%

2 : Grey 18%

Screen: 20 x 20 cm

Relative Difference in Sensing Distances According to Object Colour

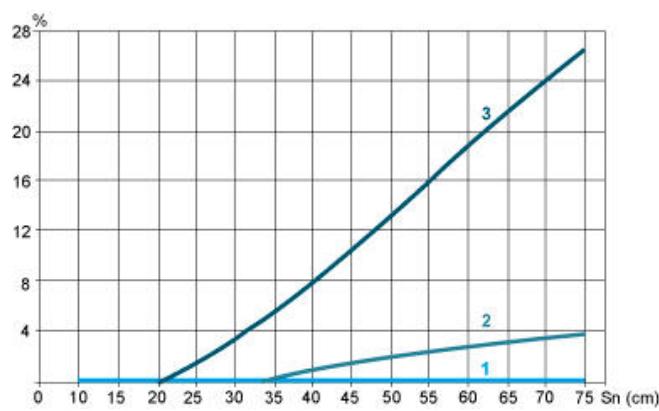

1 : White 90%

2 : Grey 18%

3 : Black 6%