



**Main**

Range of product	Telemecanique Cabling components
Accessory / separate part categor	Cabling accessories
Accessory / separate part type	Connector
Electrical connection	Straight male connector M12, 5 pins
Collar material	Metal
Status LED	Without
Cable connection	Spring / wire size <0.5 mm <sup>2</sup> / clamping capacity 4...8 mm

**Complementary**

Cable connector fixing	Screw-on
[Ue] rated operational voltage	30 V AC 36 V DC
[In] rated current	4 A
Enclosure material	Metal
Minimum insulating resistance	1000 GΩ
Contact resistance	8000 µOhm
Net weight	0.02 kg

**Environment**

IP degree of protection	IP67
Ambient air temperature for operation	-40...85 °C

**Packing Units**

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.000 cm
Package 1 Width	3.500 cm
Package 1 Length	5.000 cm
Package 1 Weight	38.000 g
Unit Type of Package 2	S02
Number of Units in Package 2	100
Package 2 Height	15 cm
Package 2 Width	30 cm
Package 2 Length	40 cm
Package 2 Weight	4.099 kg

**Offer Sustainability**

Toxic heavy metal free	Yes
California proposition 65	WARNING: This product can expose you to chemicals including: Diisobutyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
For all Reach RoHS enquiries contact us at	<a href="mailto:sustainability@tesensors.com">sustainability@tesensors.com</a>

## Contractual warranty

---


Warranty	18 months
----------	-----------

---

---

Dimensions

---

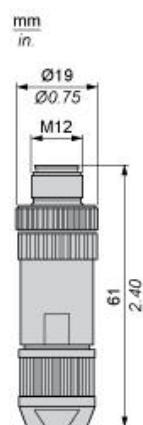

(1) Cable gland : no. 7 plastic (Pg 7)

---

Connections and Schemes

---

