

## Main

|                                   |                                  |
|-----------------------------------|----------------------------------|
| Range of product                  | Telemecanique Cabling components |
| Accessory / separate part categor | Cabling accessory                |
| Accessory / separate part type    | Pre-wired connectors             |
| Series name                       | Application                      |

## Complementary

|                                |                                       |
|--------------------------------|---------------------------------------|
| Electrical connection          | Straight female connector M12, 4 pins |
| Cable connector fixing         | Screw-on                              |
| Collar material                | Metal                                 |
| Status LED                     | Without                               |
| Cable length                   | 10 m                                  |
| Cable outer diameter           | 5.9 mm                                |
| Cable composition              | 4 x 0.34 mm <sup>2</sup>              |
| Wire insulation material       | PUR (shielded cable)                  |
| [Ue] rated operational voltage | 250 V AC<br>300 V DC                  |
| [In] rated current             | 4 A                                   |
| Contact resistance             | 5000 µOhm                             |
| Minimum insulating resistance  | 1 GΩ                                  |
| Net weight                     | 0.6 kg                                |

## Environment

|                                       |                    |
|---------------------------------------|--------------------|
| IP degree of protection               | IP65<br>IP67       |
| Ambient air temperature for operation | -25...80 °C static |
| Ambient air temperature for storage   | -25...80 °C        |

## Packing Units

|                              |           |
|------------------------------|-----------|
| Unit Type of Package 1       | PCE       |
| Number of Units in Package 1 | 1         |
| Package 1 Height             | 4.000 cm  |
| Package 1 Width              | 18.000 cm |
| Package 1 Length             | 19.000 cm |
| Package 1 Weight             | 433.000 g |
| Unit Type of Package 2       | S02       |
| Number of Units in Package 2 | 5         |
| Package 2 Height             | 15 cm     |
| Package 2 Width              | 30 cm     |
| Package 2 Length             | 40 cm     |
| Package 2 Weight             | 2.497 kg  |

## Offer Sustainability


California proposition 65

WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Diisodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

For all Reach Rohs enquiries contact us at

[sustainability@tesensors.com](mailto:sustainability@tesensors.com)

## Dimensions

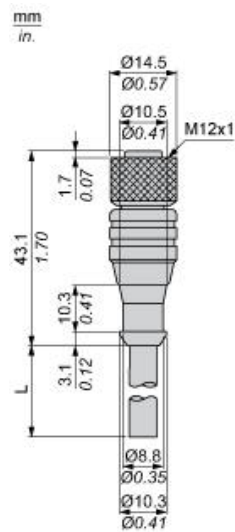


L : Length of cable

---

## Connections and Schemes

---

### Connector



BN : Brown  
BK : Black  
BU : Blue  
WH : White