

Pre wired connectors XZ, elbows female, M12  
4 pins, shielded cable PUR 2 m



## Main

|                                   |                                  |
|-----------------------------------|----------------------------------|
| Range of product                  | Telemecanique Cabling components |
| Accessory / separate part categor | Cabling accessory                |
| Accessory / separate part type    | Pre-wired connectors             |
| Series name                       | Application                      |

## Complementary

|                                |                                      |
|--------------------------------|--------------------------------------|
| Electrical connection          | Elbowed female connector M12, 4 pins |
| Cable connector fixing         | Screw-on                             |
| Collar material                | Metal                                |
| Status LED                     | Without                              |
| Cable length                   | 2 m                                  |
| Cable outer diameter           | 5.9 mm                               |
| Cable composition              | 4 x 0.34 mm <sup>2</sup>             |
| Wire insulation material       | PUR (shielded cable)                 |
| [Ue] rated operational voltage | 250 V AC<br>300 V DC                 |
| [In] rated current             | 4 A                                  |
| Contact resistance             | 5000 µOhm                            |
| Minimum insulating resistance  | 1 GΩ                                 |
| Net weight                     | 0.2 kg                               |

## Environment

|                                       |                    |
|---------------------------------------|--------------------|
| IP degree of protection               | IP67<br>IP65       |
| Ambient air temperature for operation | -25...80 °C static |
| Ambient air temperature for storage   | -25...80 °C        |

## Packing Units

|                              |           |
|------------------------------|-----------|
| Unit Type of Package 1       | PCE       |
| Number of Units in Package 1 | 1         |
| Package 1 Height             | 1.500 cm  |
| Package 1 Width              | 16.000 cm |
| Package 1 Length             | 16.000 cm |
| Package 1 Weight             | 111.000 g |
| Unit Type of Package 2       | S02       |
| Number of Units in Package 2 | 15        |
| Package 2 Height             | 15 cm     |
| Package 2 Width              | 30 cm     |
| Package 2 Length             | 40 cm     |
| Package 2 Weight             | 1.984 kg  |

## Offer Sustainability


California proposition 65

WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

For all Reach Rohs enquiries contact us at

[sustainability@tesensors.com](mailto:sustainability@tesensors.com)

## Dimensions

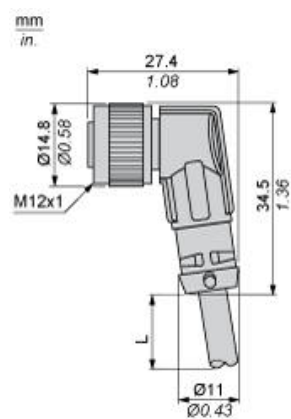


L : Length of cable

---

## Connections and Schemes

---

### Connector



BN : Brown  
BK : Black  
BU : Blue  
WH : White