

Product data sheet  
Characteristics

## XZCPV0566L10

Pre wired connectors XZ, straight female, M8,  
3 pins, cable PVC 10 m

## Main

Range of product	Telemecanique Cabling components
Accessory / separate part categor	Cabling accessory
Accessory / separate part type	Pre-wired connectors
Series name	General purpose

## Complementary

Electrical connection	Straight female connector M8, 3 pins
Cable connector fixing	Screw-on
Collar material	Metal
Status LED	Without
Cable length	10 m
Cable outer diameter	4.6 mm
Cable composition	3 x 0.25 mm <sup>2</sup>
Wire insulation material	PVC
[Ue] rated operational voltage	60 V AC 75 V DC
[In] rated current	3 A
Contact resistance	5000 µOhm
Minimum insulating resistance	1 GΩ
Net weight	0.316 kg

## Environment

IP degree of protection	IP67 IP65
Product certifications	cULus
Ambient air temperature for operation	-25...80 °C static
Ambient air temperature for storage	-25...80 °C

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.500 cm
Package 1 Width	18.000 cm
Package 1 Length	18.000 cm
Package 1 Weight	289.000 g
Unit Type of Package 2	S02
Number of Units in Package 2	10
Package 2 Height	15.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	3.232 kg

Unit Type of Package 3	P06
Number of Units in Package 3	160
Package 3 Height	75.000 cm
Package 3 Width	60.000 cm
Package 3 Length	80.000 cm
Package 3 Weight	62.500 kg

### Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Diisobutyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
For all Reach Rohs enquiries contact us at	<a href="mailto:sustainability@tesensors.com">sustainability@tesensors.com</a>


### Contractual warranty

Warranty	18 months
----------	-----------

---

Dimensions

---

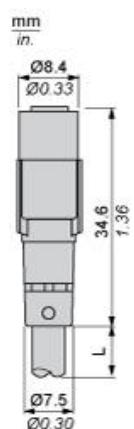


L : Length of cable

---

Connections and Schemes

---

Connector



BU : Blue

BN : Brown

BK : Black