

Product data sheet

Characteristics

XZCPV11V12L10

Pre wired connectors XZ, straight female, M12,
5 pins, cable PVC 10 m



Main

Range of product	Telemecanique Cabling components
Accessory / separate part categor	Cabling accessory
Accessory / separate part type	Pre-wired connectors
Series name	General purpose

Complementary

Electrical connection	Straight female connector M12, 5 pins
Cable connector fixing	Screw-on
Collar material	Metal
Status LED	Without
Cable length	10 m
Cable outer diameter	5.2 mm
Cable composition	5 x 0.34 mm ²
Wire insulation material	PVC
[Ue] rated operational voltage	60 V AC 75 V DC
[In] rated current	3 A
Contact resistance	5000 µOhm
Minimum insulating resistance	1 GΩ
Net weight	0.36 kg

Environment

IP degree of protection	IP65 IP67
Product certifications	cULus
Ambient air temperature for operation	-25...80 °C static
Ambient air temperature for storage	-25...80 °C

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4.000 cm
Package 1 Width	18.000 cm
Package 1 Length	18.000 cm
Package 1 Weight	368.000 g
Unit Type of Package 2	S02
Number of Units in Package 2	10
Package 2 Height	15.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	3.940 kg

Offer Sustainability

California proposition 65

WARNING: This product can expose you to chemicals including: Diisobutyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

For all Reach Rohs enquiries contact us at


sustainability@tesensors.com

Contractual warranty

Warranty

18 months


Dimensions

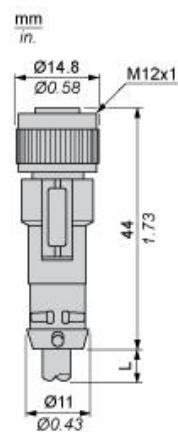

L : Length of cable

Connections and Schemes

Connectors



BU : Blue

BN : Brown

BK : Black

GY : Grey

BK/ Black / White

WH :