

Jumper cable XZ, male straight M12 3 pin, female elbowed DIN 43650 A, PUR 1 m



**Main**

Accessory / separate part categor	Cabling accessory Connection accessory
Accessory / separate part type	Jumper cable

**Complementary**

Jumper cable end 1	M12 male 3 pins straight connector with screw-on
Jumper cable end 2	DIN 43650 A elbowed connector with screw-on
Cable composition	3 x 0.75 mm <sup>2</sup>
Cable length	1 m
Wire insulation material	PUR
Cable outer diameter	6 mm
[Ue] rated operational voltage	30 V AC 36 V DC
[In] rated current	4 A
Insulation resistance	>= 1000 MΩ
Maximum resistance across terminals	5000 mΩ
Net weight	0.065 kg

**Environment**

IP degree of protection	IP69K IP67 IP65
Product certifications	cULus
Ambient air temperature for operation	-35...90 °C static -5...90 °C flexing
Ambient air temperature for storage	-35...100 °C

**Packing Units**

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4.000 cm
Package 1 Width	20.000 cm
Package 1 Length	20.000 cm
Package 1 Weight	80.000 g
Unit Type of Package 2	S02
Number of Units in Package 2	20
Package 2 Height	15.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	1.932 kg

## Offer Sustainability

---

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Diisobutyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
For all Reach Rohs enquiries contact us at	<a href="mailto:sustainability@tesensors.com">sustainability@tesensors.com</a>

## Contractual warranty


---

Warranty	18 months
----------	-----------

---

Dimensions

---

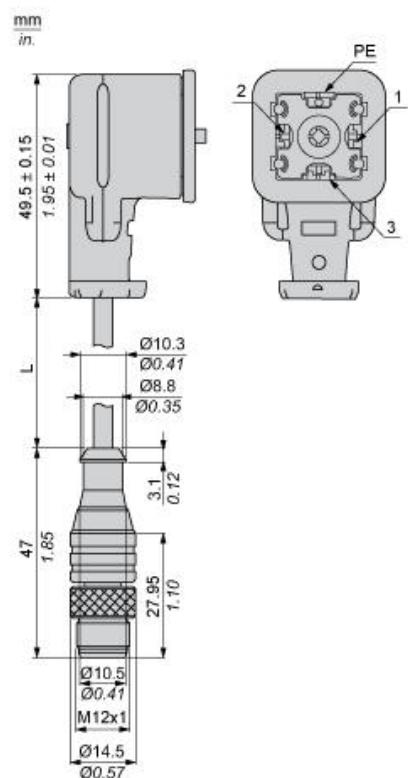

L : Length of cable

---

Connections and Schemes

---

