

Jumper cable, male straight M12 4 pin female  
straight M12 4 pin PUR shielded 2 m



**Main**

Accessory / separate part categor	Cabling accessory
Accessory / separate part type	Jumper cable

**Complementary**

Jumper cable end 1	M12 male 4 pins straight connector with screw-on
Jumper cable end 2	M12 female 4 pins straight connector with screw-on
Collar material	Metal
Cable composition	4 x 0.34 mm <sup>2</sup>
Cable length	2 m
Wire insulation material	PUR (shielded cable)
Cable outer diameter	5.9 mm
[Ue] rated operational voltage	250 V AC 300 V DC
[In] rated current	4 A
Insulation resistance	>= 1000 MΩ
Maximum resistance across terminals	5000 mΩ
Net weight	0.3 kg

**Environment**

IP degree of protection	IP65 IP67
Ambient air temperature for operation	-25...80 °C static
Ambient air temperature for storage	-25...80 °C

**Packing Units**

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.000 cm
Package 1 Width	16.500 cm
Package 1 Length	18.000 cm
Package 1 Weight	125.000 g
Unit Type of Package 2	S02
Number of Units in Package 2	40
Package 2 Height	15 cm
Package 2 Width	30 cm
Package 2 Length	40 cm
Package 2 Weight	5.358 kg

## Offer Sustainability

California proposition 65

WARNING: This product can expose you to chemicals including: Diisobutyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)


For all Reach Rohs enquiries contact us at

[sustainability@tesensors.com](mailto:sustainability@tesensors.com)

---

Dimensions

---

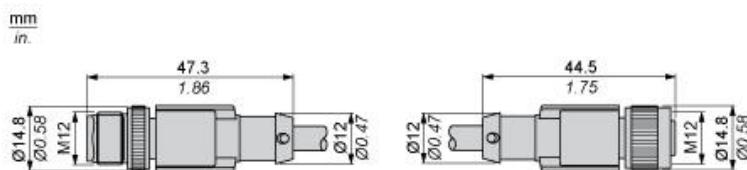

---

Connections and Schemes

---

