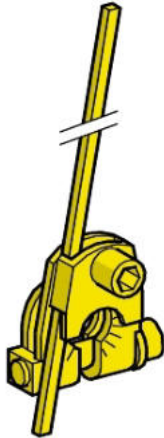# Product data sheet
Characteristics

ZC2JY513

Limit switch lever, Limit switches XC Standard, ZC2JY, stainless steel square rod 3 mm, corrosive

Main

Range of product	OsiSense XC
Series name	Special format
Product or component type	Limit switch lever
Device short name	ZC2J
Product compatibility	XC2J
Associated head	ZC2JE07 ZC2JE01 ZC2JE05 ZC2JE02 ZC2JE06 ZC2JE03 ZC2JE04
Movement of operating head	Rotary
Type of operator	Rod lever spring return metal (square rod 3 mm, L = 125 mm)
Type of approach	Lateral approach

Complementary

Switch actuation	By any moving part
Positive opening	Without

Environment

Ambient air temperature for operation	-25…70 °C for standard environment -40…70 °C for low temperature 10…120 °C for high temperature
Ambient air temperature for storage	-40…70 °C standard environment -40…70 °C low temperature 10…120 °C high temperature
Environmental characteristic	Low temperature High temperature Corrosive

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.0 cm
Package 1 Width	3.0 cm
Package 1 Length	12.5 cm
Package 1 Weight	35.0 g

Offer Sustainability

Sustainable offer status	Green Premium product
Circularity Profile	No need of specific recycling operations
California proposition 65	WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
For all Reach Rohs enquiries contact us at	sustainability@tesensors.com

Telemecanique Sensors

Contractual warranty

Warranty	18 months

Telemecanique
Sensors