


4 Characteristics diagrams

Switching losses (typical), MOSFET

$$E = f(R_G)$$


$V_{DD} = 600 \text{ V}$, $I_D = 420 \text{ A}$, $V_{GS} = -3/18 \text{ V}$

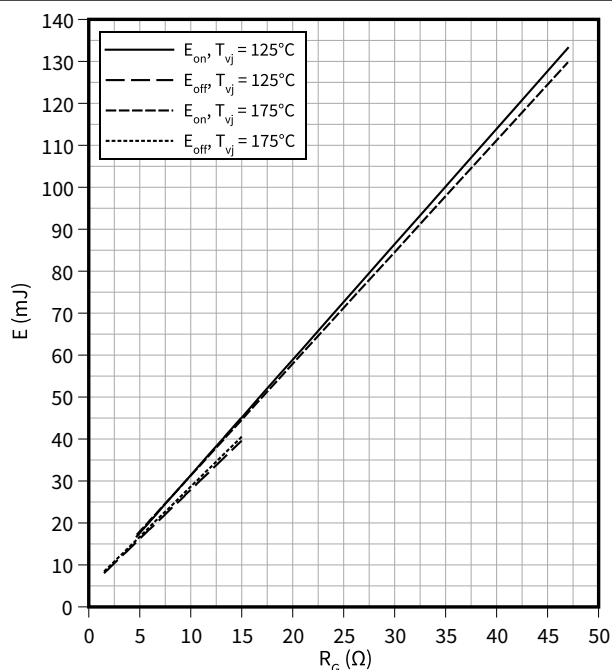

Switching times (typical), MOSFET

$$t = f(I_D)$$


$R_{Goff} = 1.5 \text{ } \Omega$, $R_{Gon} = 4.7 \text{ } \Omega$, $V_{DD} = 600 \text{ V}$, $T_{vj} = 175 \text{ } ^\circ\text{C}$, $V_{GS} = -3/18 \text{ V}$

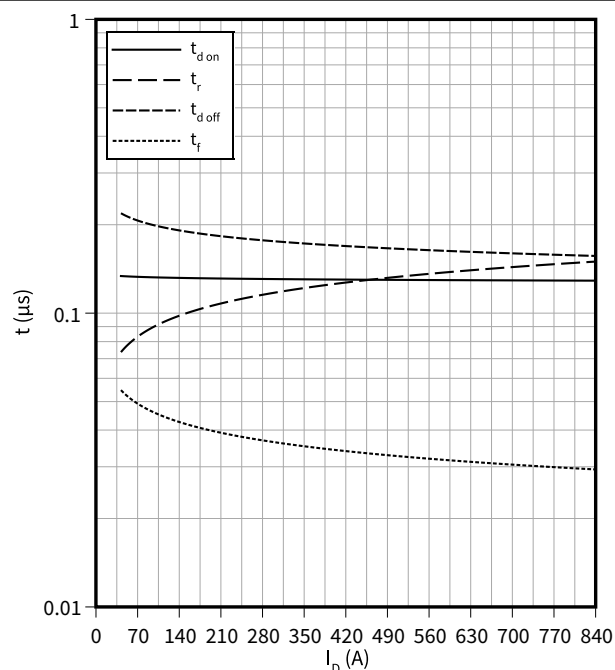

Switching times (typical), MOSFET

$$t = f(R_G)$$


$V_{DD} = 600 \text{ V}$, $I_D = 420 \text{ A}$, $T_{vj} = 175 \text{ } ^\circ\text{C}$, $V_{GS} = -3/18 \text{ V}$

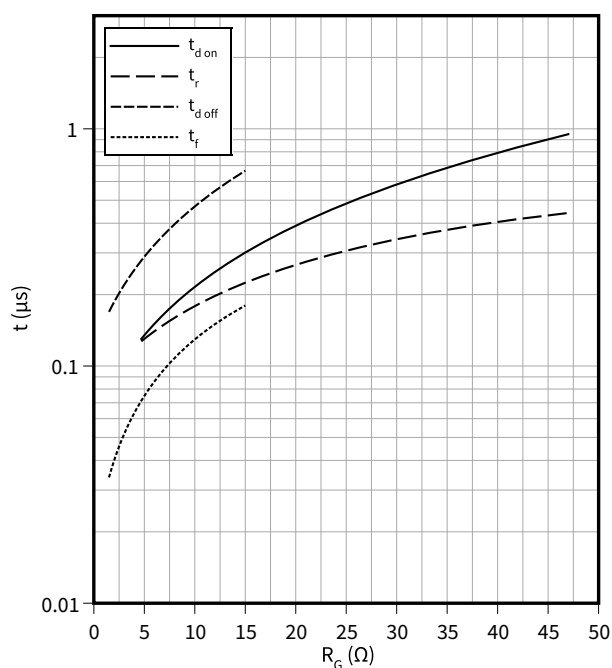

Current slope (typical), MOSFET

$$di/dt = f(R_G)$$

$V_{DD} = 600 \text{ V}$, $I_D = 420 \text{ A}$, $V_{GS} = -3/18 \text{ V}$

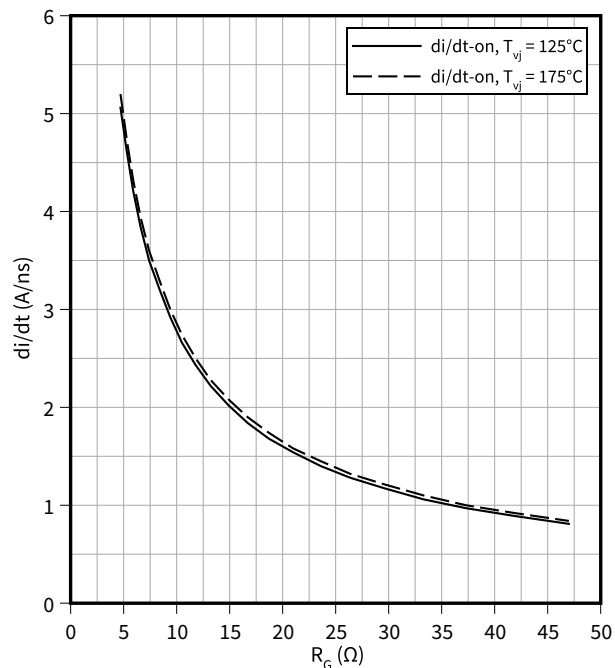


4 Characteristics diagrams

Voltage slope (typical), MOSFET

$dv/dt = f(R_G)$


$V_{DD} = 600\text{ V}, I_D = 420\text{ A}, V_{GS} = -3/18\text{ V}$

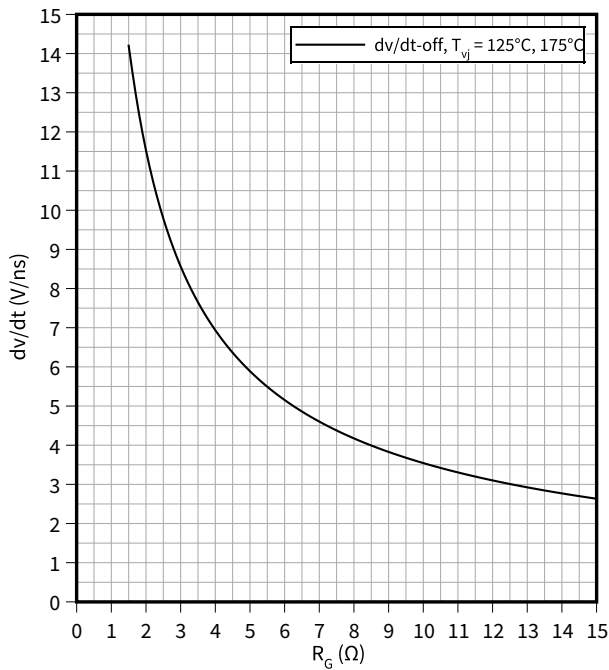

Reverse bias safe operating area (RBSOA), MOSFET


$I_D = f(V_{DS})$

$R_{Goff} = 1.5\ \Omega, T_{vj} = 175^\circ\text{C}, V_{GS} = -3/18\text{ V}$

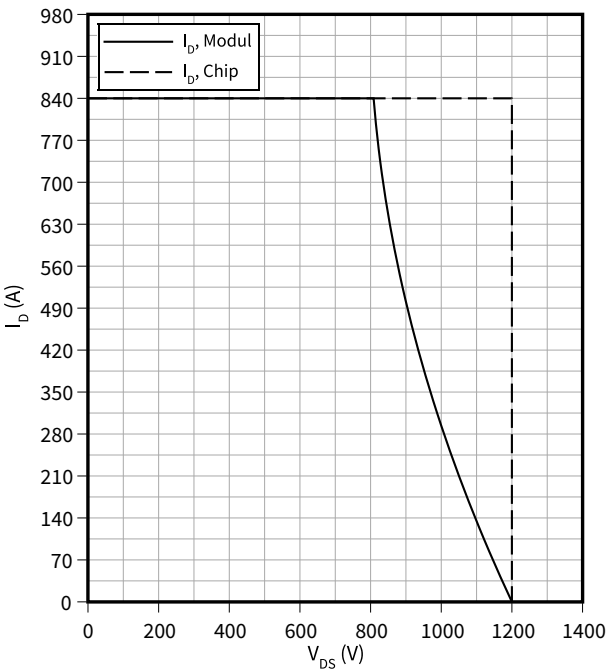

Transient thermal impedance, MOSFET

$Z_{th} = f(t)$

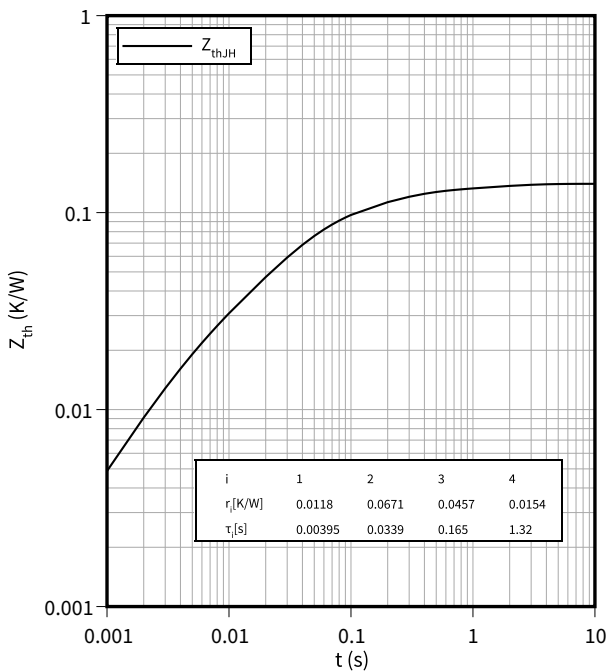

7 Module label code

Module label code			
Code format	Data Matrix		Barcode Code128
Encoding	ASCII text		Code Set A
Symbol size	16x16		23 digits
Standard	IEC24720 and IEC16022		IEC8859-1
Code content	<i>Content</i>	<i>Digit</i>	<i>Example</i>
	Module serial number	1 – 5	71549
	Module material number	6 - 11	142846
	Production order number	12 - 19	55054991
	Date code (production year)	20 – 21	15
	Date code (production week)	22 – 23	30
Example	 71549142846550549911530  71549142846550549911530		

Figure 3

Revision history

Document revision	Date of release	Description of changes
0.10	2023-01-20	Initial version
0.20	2023-03-03	Preliminary datasheet

