


10542000	<b>DATA SHEET</b>	
Valid from: 18.09.2020	<b>EPIC<sup>®</sup> H-A 32 SS / H-A 32 BS</b>	

## Description

- H-A inserts with screw termination up to 2.5 mm<sup>2</sup> wire cross section.
- Slim connector insert for standard application.
- Easy to service screw connection.
- Universal for current and voltage transmission.

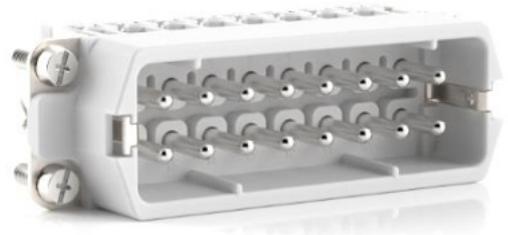

## General Characteristics

Series	H-A 32
Version	Male/Female(Article 10531000)
Wire Protection	No
Number of Contacts	32 + 2 PE
Termination Methods	Screw termination: 0.5 - 2.5 mm <sup>2</sup> (2.5 mm <sup>2</sup> with conductor end sleeves depending on the crimping profile)
Temperature Range	-40°C to +100°C, short-term up to +125°C

## Mechanical Characteristics

Cycle of mechanical operation	100
-------------------------------	-----

## Electrical Characteristics

Rated Voltage, IEC	400 V
Rated Voltage, UL	600 V
Rated Voltage, CSA	600 V
Rated Impulse Voltage	4 kV
Rated Current, IEC	16 A
Rated Current, UL	14 A
Rated Current, CSA	16 A
Contact Resistance	1,5 - 4 mOhm
Degree of Soiling	3

## Materials and Surfaces

Contacts	Copper alloy, hard silver-plated
Insulating Body	PBT
Flammability Class according to UL 94	V0

## Approvals

UL-Approval, E-File-Number	E75770
----------------------------	--------

## Standard



Safety Standard	IEC 61984, UL 1977, CSA-C22.2 182.3
-----------------	-------------------------------------

AbN  
automation

Creator: STKU3/PDP Released: IVSE1/PDP	Document: DB10542000EN Version: 02	Page 1 of 3
---	---------------------------------------	-------------

10542000	<b>DATA SHEET</b>	
Valid from: 18.09.2020	EPIC® H-A 32 SS / H-A 32 BS	

### Technical Drawings

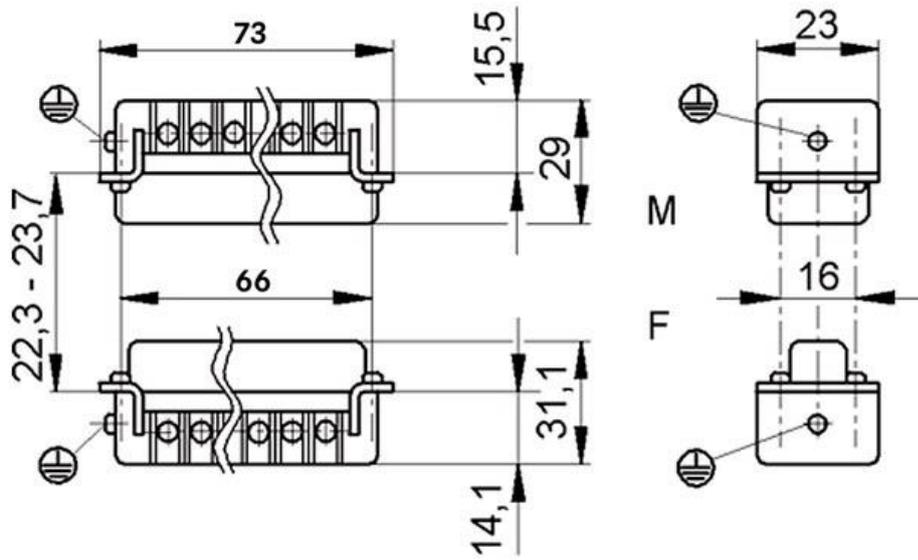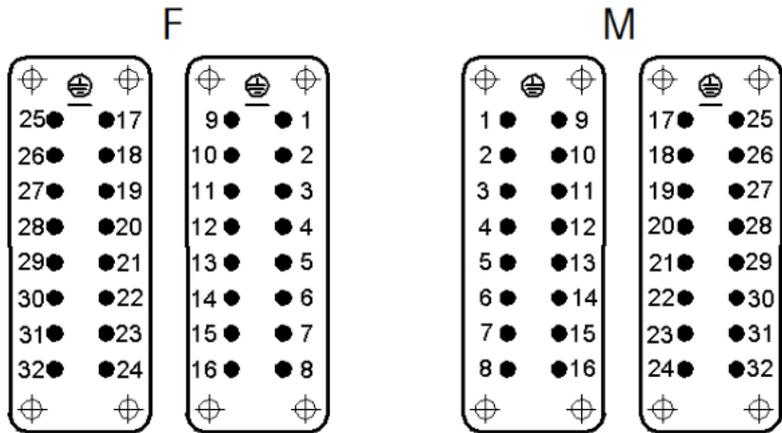

10542000	<b>DATA SHEET</b>	
Valid from: 18.09.2020	EPIC <sup>®</sup> H-A 32 SS / H-A 32 BS	



Industrial machinery and plant engineering



Assembly time



Space requirement

#### Info

Slim standard insert, easy to connect by screw  
Universal for current and voltage transmission

#### Application range

Machine and equipment manufacturings  
Control engineering

#### Remark

Photographs are not to scale and do not represent detailed images of the respective products.

AbN  
automation

Creator: STKU3/PDP Released: IVSE1/PDP	Document: DB10542000EN Version: 02	Page 3 of 3
---	---------------------------------------	-------------