

1 1250000	<b>DATA SHEET</b>	
Valid from: 12.06.2024	<b>EPIC® H-D 15 SCG / H-D 15 BCG stamped</b>	

## Description

- H-D inserts for stamped and machined crimp contacts
- Inserts of the connector series H-D are designed for applications in which a high number of contacts are required.



## General Characteristics

Series	H-D 15
Version	Male (Article 11255000)/ Female (Article 11256000)
Number of Contacts	15 + PE
Termination Methods	Crimp termination: 0.14 - 2.5 mm <sup>2</sup>
Temperature Range	-40°C to +100°C, short-term up to +125°C

## Mechanical Characteristics

Cycle of mechanical operation	100
-------------------------------	-----

## Electrical Characteristics

Rated Voltage, IEC	250 V
Rated Voltage, UL	600 V
Rated Impulse Voltage	2.5 kV
Rated Current, IEC	10 A
Rated Current, UL	10 A
Contact Resistance	< 2 mOhm
Degree of Soiling	3

## Materials and Surfaces

Contacts	Copper alloy, hard silver/gold-plated
Insulating Body	PC
Flammability Class according to UL 94	V0

## Approvals

UL-Approval, E-File-Number	E75770
VDE-Approval, VDE-REG.-Nr.	B437

## Standard

Safety Standard	IEC 61984, UL 1977
-----------------	--------------------

AbN  
automation




Creator: MANA2/PDP Released: IVSE1/PDP	Document: DB11255000EN Version: 04	Page 1 of 2
---	---------------------------------------	-------------

### Technical Drawings



**M**

**F**

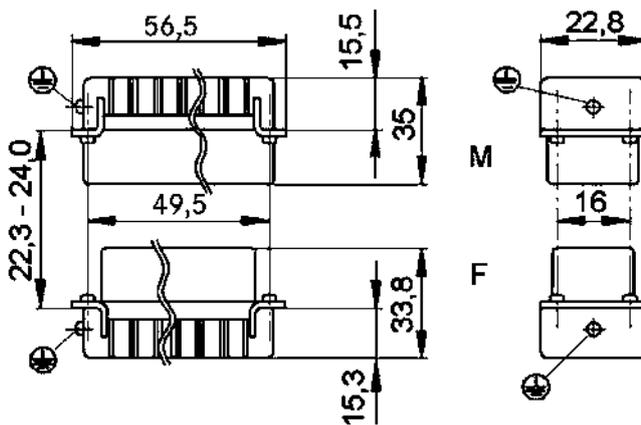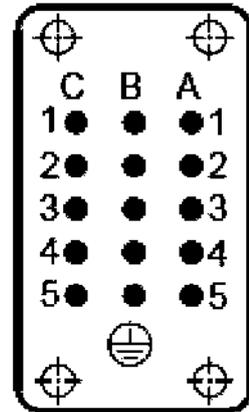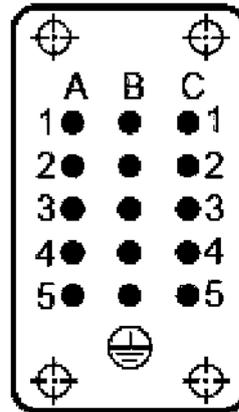

Industrial machinery and plant engineering

#### Application range

Machine and equipment manufacturing  
Control engineering

#### Remark

Photographs are not to scale and do not represent detailed images of the respective products.