


2170345	DATA SHEET	
valid from: 2025-11-06	UNITRONIC BUS DN THIN FD P 1x2x24/19AWG + 1x2x22/19AWG	

Application

Field of use:	Field bus cable for DeviceNet applications based on CAN technology standardized in IEC/EN 62026-3. For links between industrial devices such as sensors and actuators and higher-level devices such as PLCs and PCs. Suitable for highly flexible applications in power chains and permanent moved machine parts.
Performance:	Screened foiled twisted pair cable, having a nominal impedance of 120 Ω. Designed for transmission rates of 125 Kbit/s up to 500 Kbit/s. For cable lengths up to 100 m. The cable consists of two wires for data transmission and two wires for power supply (24 V DC).
Characteristics:	flame retardant, UV resistant, halogen free
Applications:	for use as trunk cable or as drop cable in DeviceNet networks

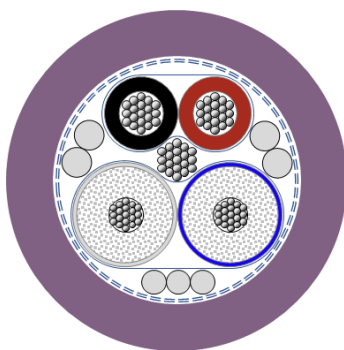

Design

Certification	E224262 (UL) CL2X SUN RES acc. to. UL 13 E236660 c(UL)us CMX 75°C acc. to. UL 444 and CSA C22.2 No. 214
Conductor	data pair: fine-wire stranded tinned copper 24/19 AWG conductor diameter: nom. 0.63 mm power pair: fine-wire stranded tinned copper 22/19 AWG conductor diameter: nom. 0.8 mm
Insulation	data pair: foamed polyolefine core diameter: nom. 2.0 mm power pair: polyolefine core diameter: nom. 1.4 mm
Core identification code	data pair: white/blue power pair: red/black
Stranding	data pair: data cores twisted to pair power pair: power cores stranded to pair overall assembly: screened data pair and screened power pair stranded around a central drain wire
Screen	data pair: plastic laminated aluminum foil power pair: plastic laminated aluminium foil overall assembly: braid of tinned copper wires (coverage 80 % ± 5 %) drain wire: fine-wire stranded tinned copper (22/19 AWG)
Taping	overall assembly: non-woven tape
Outer sheath	TPU violet, similar RAL 4001 outer diameter: 6.8 mm ± 0.3 mm

Electrical properties at 20 °C

Conductor resistance	data pair: loop resistance: max. 181.8 Ω/km power pair: loop resistance: max. 114.8 Ω/km screen: DC resistance: nom. 10.5 Ω/km
Insulation resistance	data pair: core/core: ≥ 5 GΩ×km power pair: core/core: ≥ 200 MΩ×km
Mutual capacitance	data pair: core/core: nom. 39.37 nF/km (1 kHz) core/screen: nom. 78.74 nF/km (1 kHz)

Creator: TOGO / PDC	Document: DB2170345EN	Page 1 of 2
Released: ALTE / PDC	Version: 6	

2170345	DATA SHEET	
valid from: 2025-11-06	UNITRONIC BUS DN THIN FD P 1x2x24/19AWG + 1x2x22/19AWG	

Capacitance unbalance	data pair:	core/core:	nom. 3937 pF/km (1 kHz)
Characteristic impedance	data pair:	1 MHz:	120 $\Omega \pm 12 \Omega$
Attenuation	data pair:	125 kHz:	nom. 0.95 dB/100m
		500 kHz:	nom. 1.64 dB/100m
		1 MHz:	nom. 2.3 dB/100m
Signal propagation time	data pair:	1 MHz:	nom. 4.8 ns/m
Maximum operating voltage	overall assembly:	EN/IEC:	300 V (not intended to be used in conjunction with low impedance sources, such as power grids)
Nominal voltage	power pair:	EN/IEC:	24 V DC
Rated voltage	overall assembly:	UL/CSA:	300 V
Test voltage	overall assembly:	core/core:	2000 V
		core/screen:	2000 V

Mechanical and thermal properties

Minimum bending radius	overall assembly:	fixed installation:	8 × outer diameter
		continuous flexing:	15 × outer diameter
Temperature range	overall assembly:	fixed installation:	-40 °C up to +80 °C
		continuous flexing:	-30 °C up to +70 °C
		UL/CSA:	75 °C
Flammability	VW-1 acc. to UL 13 §27		
Halogen free	acc. to. IEC 60754-1 resp. EN 60754-1		
Weather and UV resistance	SUN RES acc. to UL 13 §29		
General requirements	These cables are conform to the EU-Directive 2011/65/EU (RoHS, Restriction of the use of certain hazardous substances) and the LV-Directive 2014/35/EU (Low voltage Directive).		
Environmental information	These cables meet the substance-specific requirements of the EU Directive 2011/65/EU (RoHS).		

Creator:	TOGO / PDC	Document:	DB2170345EN	Page 2 of 2
Released:	ALTE / PDC	Version:	6	