


2170483	DATA SHEET	
valid from: 01.01.2019	ETHERLINE® TORSION P CAT6A 4 x 2 x AWG24/7	

Application

ETHERLINE® TORSION P Cat. 6A is CATEGORY 6A high speed data cable off halogen free materials for industrial usage. The screening ensures high transmission reliability in areas with a high load of electromagnetic capacity. The PUR jacket is resistant against mineral oils and abrasion. The cable is designed for applications with torsional stress in dry and damp areas.

Design

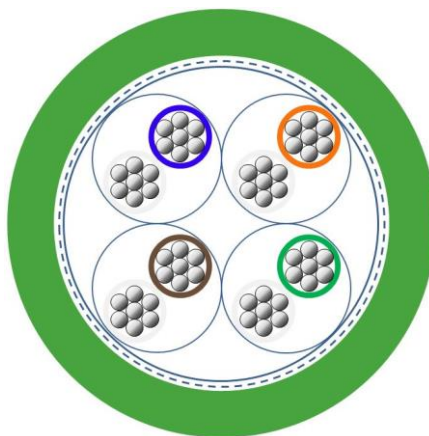

Certification	c(UL)us type CMX acc. to UL 444; UL AWM styles 11117 and 21576 (1000 V, 80 °C) acc. to UL 758 cRU AWM I/II A/B (FT2) acc. to CSA C22.2 No.210-05
Conductor	fine-stranded, tinned copper wires, AWG24/7 or approx. 0.22 mm ²
Insulation	foam-skin polyolefin, outer Ø approx. 1.3 mm
Core identification code	pair 1: white-blue, pair 2: white-orange, pair 3: white-green, pair 4: white-brown
Stranding	2 cores twisted to pairs Pair screening with aluminium laminated foil 4 screened pairs twisted around central core element and shielded with aluminium laminated foil
Screen	braid of tinned copper wires, coverage approx. 85 %
Taping	thin non-woven tape (optional)
Outer sheath	PUR compound, Colour: green similar RAL 6018, outer Ø: approx. 8.9 mm

Electrical properties at 20°C

Loop resistance	max. 175.2 Ω/km
Insulation resistance	min. 5 GΩxkm
Mutual capacitance	nom. 50 nF/km
Characteristic impedance	nom. 100 Ω acc. to IEC 61156-6
Peak operating voltage	125 V
Test voltage	conductor/conductor 750 V conductor/screen 750 V

AbN
automation

Creator: TOST / PDC	Document: DB2170483EN	Page 1 of 2
Released: ALTE / PDC	Version: 04	

2170483	DATA SHEET	
valid from: 01.01.2019	ETHERLINE® TORSION P CAT6A 4 x 2 x AWG24/7	

Electrical transmission properties at 20°C

f [MHz]	Attenuation [dB/100m] standard	NEXT [dB] standard	EL FEXT [dB] standard	Return Loss [dB] standard
4	5,7	66,3	56	23
10	9,5	59,5	46,4	25
16	11,5	57,1	44,1	25
31,25	15,8	53,1	38	23,3
62,5	22,4	48,4	32,2	20,8
100	29	45,2	27,8	19
200	41,1	40,8	22	17,3
250	46,6	39,3	20,1	17,3
300	51,4	38,2	18,5	17,3
350	55,8	37,1	17,1	17,3
500	67,9	34,8	14	17,3

Mechanical and thermal properties

Minimum bending radius	moved: 15 x cable Ø fixed installation: 8 x cable Ø
Temperature range	moved: -30° C up to +70° C fixed installation: -40° C up to +80° C
Torsional stress	min. 1.000.000 cycles ±180 °/m
Flammability	flame retardant acc. to IEC 60332-1-2, VW-1 acc. to UL 1581
Halogen free	acc. to VDE 0472-815
Oil resistance	acc. to IEC 60811-2-1
General requirements	This cable is conform to the EU-Directive 2011/65/EU (RoHS, Restriction of the use of certain hazardous substances).

Creator: TOST / PDC	Document: DB2170483EN	Page 2 of 2
Released: ALTE / PDC	Version: 04	