

24420055

**DATA SHEET**Valid from:  
28.07.2021**EPIC® SIGNAL M23 A3 N****LAPP****Description**

- Circular connectors for servo cables and encoders
- Housings are very flexible - cable connectors with wide clamping range, receptacle housings for assembling the inserts from the front and rear
- Permanent vibration protection

**General characteristics**

Series	SIGNAL M23
Version	panel-mount connector, angled, rotatable, front wall mounting
Protection rating	IP 65
Temperature range	-25 °C to +125 °C

**Product variations**

Article number	Coding	Fastening type	PU
24420055	black (N)	Ø2,7mm (4x)	5
24420054	black (N)	Ø2,7mm (4x)	20

**Materials and surfaces**

Housing	Blue chromated (CrVI free), zinc die-casting
Sealing	FPM/FKM

**Approvals**

UL File Number	E249137
----------------	---------

**Standard**

Safety Standard	IEC 61984; UL 2238; CSA 22.2 182.3
-----------------	------------------------------------

AbN  
automation

Creator: STKU3/PDP Released: IVSE1/PDP	Document: DB24420055EN Version: 05	Page 1 of 3
---	---------------------------------------	-------------

We reserve all rights according to DIN ISO 16016.

PD 0019/05\_04.18EN

24420055


# DATA SHEET

Valid from:  
28.07.2021


EPIC® SIGNAL M23 A3 N



## Drawings

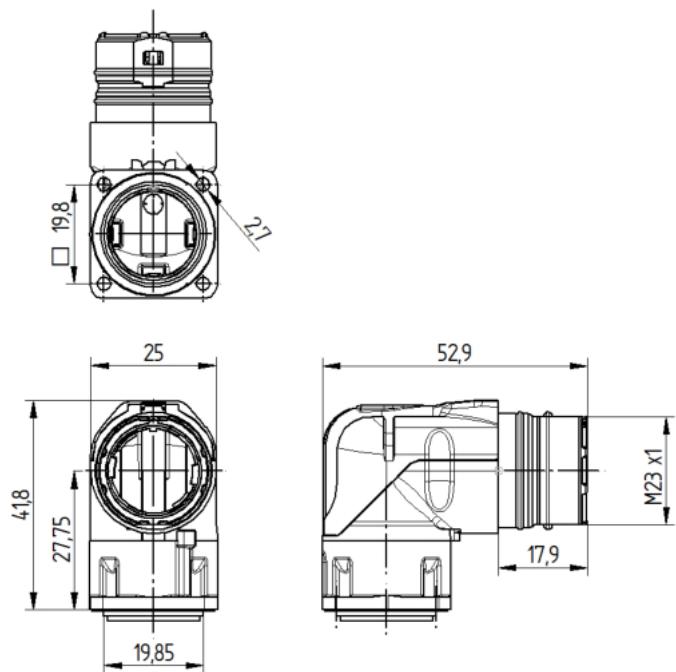

## Codierung

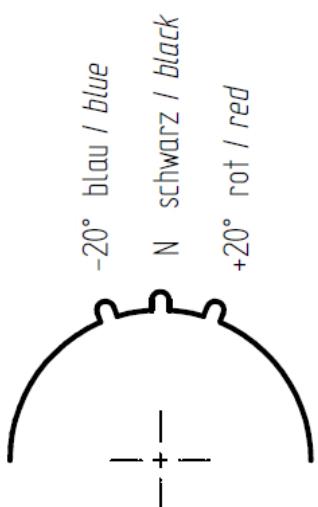

**A3**

Ansicht steckseitig  
view from mating side

24420055

# DATA SHEET

Valid from:  
28.07.2021


EPIC® SIGNAL M23 A3 N



**LAPP**



Good chemical resistance



Industrial machinery and plant engineering



Robust



Waterproof



Wind energy

## Info

Rotateable with clearly defined adjustment positions

## Application range

Plant engineering

Servo drives and Servo assemblies

Measurement and control technology

## Remark

Photographs are not to scale and do not represent detailed images of the respective products.

AbN  
automation

Creator: STKU3/PDP  
Released: IVSE1/PDP

Document: DB24420055EN  
Version: 05

Page 3 of 3

We reserve all rights according to DIN ISO 16016.

PD 0019/05\_04.18EN