

24441130	DATA SHEET	
Valid from: 10.11.2023	EPIC® POWER M23 D6 HOUSING, SCREW	

Description

- Circular connectors for servomotors and power supply
- High power at smallest installation space
- Optimal solution for electric motors
- EMC-optimised design
- Safety use in field environment by high protection class
- Cable clamp for EPIC® POWER M23
- With seal
- With Cap Nut



General characteristics

Series	EPIC® POWER M23 D6 housing type: screw, cable clamp, cap Nut
Version	Cable connector, package unit = 20 pcs
Temperature range	-25 to +125 °C
Degree of soiling	3

Product Variations

Article number	Article	Cable clamping range in [mm]
24441133	EPIC POWER M23 D6 8,5-11 (20)	8,5 - 11
24441134	EPIC POWER M23 D6 10,5-15,5 (20)	10,5 - 15,5
381166119	EPIC POWER M23 D6 7.5-15,5 (20)	7,5-15,5
24441135	EPIC POWER M23 D6 14-17 (20)	14-17

Materials and surfaces

Housing	Nickel-plated zinc die-casting
Coupling sleeve	Nickel-plated Copper Alloy
Clamping ring	Spring steel, coated
Cable clamp	PA
Seal	CRNBR
O-ring	FKM
Cap Nut	Nickel-plated Copper Alloy

AbN
automation

Creator: STKU3/PDP Released: IVSE1/PDP	Document: DB24441130EN Version: 00	Page 1 of 3
---	---------------------------------------	-------------

24441130	DATA SHEET	
Valid from: 10.11.2023	EPIC® POWER M23 D6 HOUSING, SCREW	

Approvals

UL-File-Number

Approval in pending


Standard

Safety Standard


IEC 61984



Technical Drawing

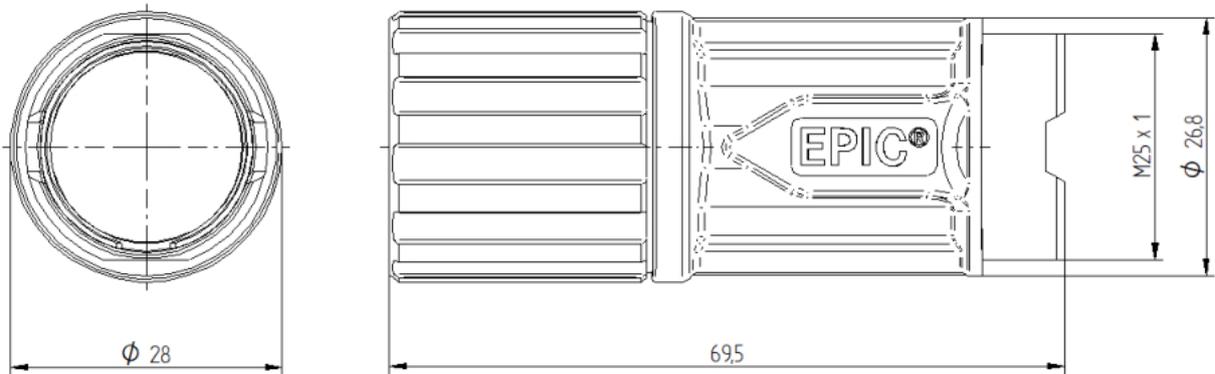

Item	Wrench size
housing	24
Cap nut	26 / 27 (14-17 & 7,5-15,5)

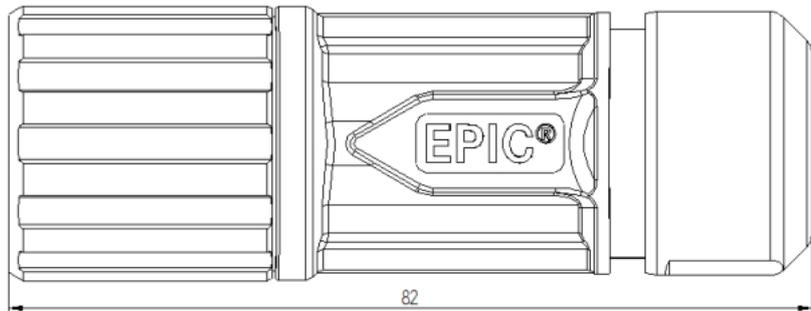

24441130	DATA SHEET	
Valid from: 10.11.2023	EPIC® POWER M23 D6 HOUSING, SCREW	



Good chemical resistance




Corrosion-resistant



Industrial machinery and plant engineering



Mechanical resistance



Optimum strain relief



Waterproof

Application range

Plant engineering
Servo drives and servo assemblies

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

AbN
automation

Creator: STKU3/PDP Released: IVSE1/PDP	Document: DB24441130EN Version: 00	Page 3 of 3
---	---------------------------------------	-------------