

**HITRONIC® HVN-Mini Outdoor
Stranded Cable****DB_HVN-Mini_EN**
(version 4.0)
valid from: 01.11.2014**1. Product Description**

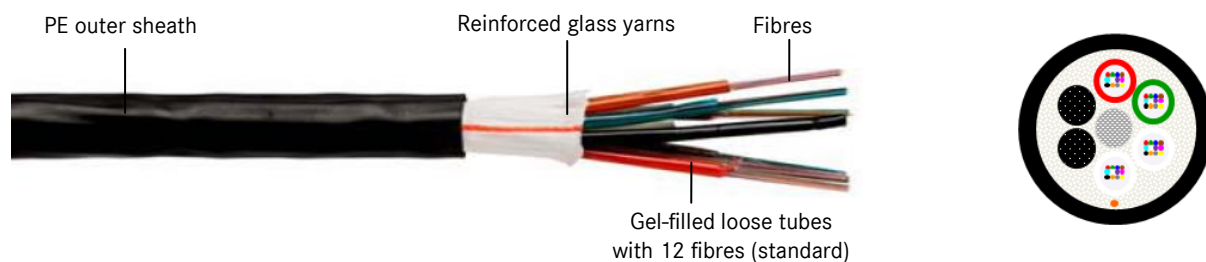
Cable designation: A-DQ(ZN)2Y

Micro outdoor glass fibre optic cable with multiple stranded loose tubes, non-metallic strength elements and halogen-free cable sheath, reduced and compact outer dimensions

2. Application

For use in outdoor, campus backbone, WAN applications, FTTx applications
Designed for installation by air-blowing systems

Methods of deployment: blowing into empty plastic pipes, ducts and trays

3. Product Design

Cable core	Up to 12 stranded loose tubes with a total of up to 144 glass fibres, a central element, reinforced glass yarns, reduced outer sheath
Cable inner sheath	-
Cable outer sheath	Polyethylene (PE) outer sheath, halogen-free, UV and water-resistant
Colour of inner sheath	-
Colour of outer sheath	Black (RAL 9005)
Colour of loose tubes	Active tubes: blue, orange, green, brown, grey, white, red, black, yellow, violet, pink, turquoise (according to TIA-598) Filler: black
Identification of fibres	Blue, orange, green, brown, grey, white, red, black, yellow, violet, pink, turquoise (according to TIA-598)
Type of armouring	-

AbN
automation

**HITRONIC® HVN-Mini Outdoor
Stranded Cable**
DB_HVN-Mini_EN
(version 4.0)
 valid from: 01.11.2014

4. Optical and Physical Properties of Cabled Fibre (and Bare Fibre)

Multimode fibre		50/125 µm	50/125 µm	50/125 µm	62.5/125 µm
		OM4	OM3	OM2	OM1
Attenuation	@ 850 nm dB/km	≤ 3.5 (2.5)	≤ 3.5 (2.5)	≤ 3.5 (2.5)	≤ 3.5 (3.0)
	@ 1300 nm dB/km	≤ 1.5 (0.7)	≤ 1.5 (0.7)	≤ 1.5 (0.7)	≤ 1.5 (0.7)
Bandwidth	@ 850 nm MHz-km	≥ 3500	≥ 1500	≥ 500	≥ 200
	@ 1300 nm MHz-km	≥ 500	≥ 500	≥ 500	≥ 500
Numerical aperture		0.2 ± 0.015	0.2 ± 0.015	0.2 ± 0.015	0.275 ± 0.015
Core diameter	µm	50 ± 2.0	50 ± 2.0	50 ± 2.0	62.5 ± 2.5
Cladding diameter	µm	125 ± 1.0	125 ± 1.0	125 ± 1.0	125 ± 2
Primary coating diameter	µm	242 ± 5	242 ± 5	242 ± 5	245 ± 10
Single-mode fibre		9/125 µm			
		(ITU-T G.652.D)			
Attenuation	@ 1310 nm dB/km	≤ 0.4 (0.35)			
	@ 1550 nm dB/km	≤ 0.4 (0.21)			
Chromatic dispersion	@ 1310 nm ps/(nm-km)	≤ 3.0			
	@ 1550 nm ps/(nm-km)	≤ 18			
Zero dispersion wavelength		Nm			
Cut-off wavelength		Nm			
PMD		ps/km			
Mode field diameter		µm			
Cladding diameter		µm			
Primary coating diameter		µm			

5. Thermal Properties

Operating temperature	-30°C to +70°C
Installation temperature	-5°C to +50°C
Storage temperature	-30°C to +70°C

6. Mechanical Properties

Max. number of fibres	Up to 72	96	144
Cable outer diameter (mm)	5.8 ± 0.2	7.2 ± 0.2	8.0 ± 0.3
Cable weight (kg/km)	33	52	80
Min. bending radius (mm)	static	15 x D	15 x D
	dynamic	20 x D	20 x D
Max. tensile strength (N)	500	1200	1000
Max. crush resistance (N)	300	300	300

**HITRONIC® HVN-Mini Outdoor
Stranded Cable**DB_HVN-Mini_EN
(version 4.0)
valid from: 01.11.2014**7. Chemical Properties**

PE sheath	Non-aging, halogen-free, good stability to acids and alkalis
-----------	--

8. EC Directives

Not applicable for fibre optic cables

9. Approvals

- RoHS
- Environmental and mechanical tests comply to EN 187000 and IEC 60794
- Halogen free according to IEC 60754-1

10. Product Range Overview

Article number	Article designation	Fibre type	No. of Fibres	Outer Ø (mm)
Multimode				
26609424	HITRONIC® HVN-Mini500 2x12G 50/125 OM4	50/125 OM4	24	5.8
26609448	HITRONIC® HVN-Mini500 4x12G 50/125 OM4	50/125 OM4	48	5.8
26609324	HITRONIC® HVN-Mini500 2x12G 50/125 OM3	50/125 OM3	24	5.8
26609348	HITRONIC® HVN-Mini500 4x12G 50/125 OM3	50/125 OM3	48	5.8
26609396	HITRONIC® HVN-Mini1200 8x12G 50/125 OM3	50/125 OM3	96	7.2
26609344	HITRONIC® HVN-Mini1000 12x12G 50/125 OM3	50/125 OM3	144	8.0
26609224	HITRONIC® HVN-Mini500 2x12G 50/125 OM2	50/125 OM2	24	5.8
26609248	HITRONIC® HVN-Mini500 4x12G 50/125 OM2	50/125 OM2	48	5.8
26609124	HITRONIC® HVN-Mini500 2x12G 62.5/125 OM1	62.5/125 OM1	24	5.8
26609148	HITRONIC® HVN-Mini500 4x12G 62.5/125 OM1	62.5/125 OM1	48	5.8
Single-mode				
26609912	HITRONIC® HVN-Mini500 1x12E 9/125 OS2	9/125 OS2	12	5.8
26609924	HITRONIC® HVN-Mini500 2x12E 9/125 OS2	9/125 OS2	24	5.8
26609948	HITRONIC® HVN-Mini500 4x12E 9/125 OS2	9/125 OS2	48	5.8
26609972	HITRONIC® HVN-Mini500 6x12E 9/125 OS2	9/125 OS2	72	5.8
26609996	HITRONIC® HVN-Mini1200 8x12E 9/125 OS2	9/125 OS2	96	7.2
26609944	HITRONIC® HVN-Mini1000 12x12E 9/125 OS2	9/125 OS2	144	8.0

AbN
automation