

**HITRONIC® HVW Armoured
Outdoor Stranded Cable****DB HVW3000_EN (version 3.0)**
valid from: 20.02.2014**1. Product Description**

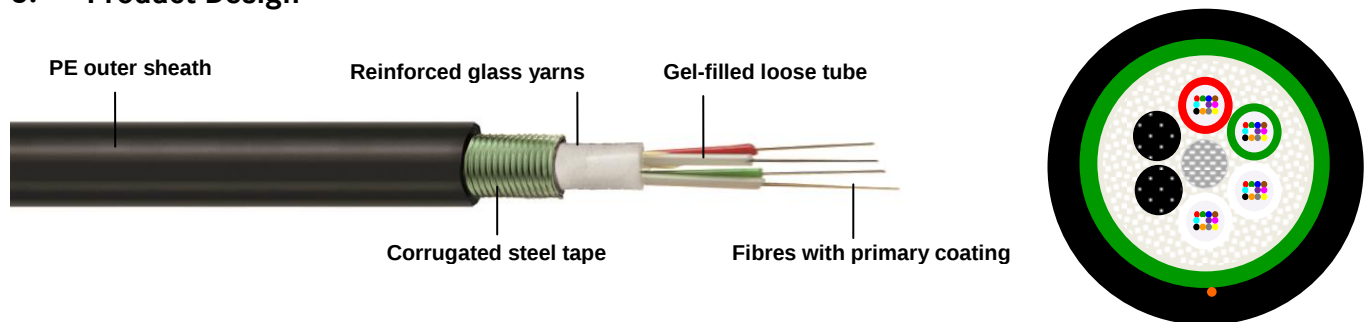
Cable designation: A-DQ(ZN)(SR)2Y

Outdoor glass fibre optic cable with corrugated steel tape armour, multiple stranded loose tube, non-metallic strength elements, longitudinally and laterally watertight, excellent rodent protection, robust and halogen-free cable sheath

2. Application

For use in outdoor, direct burial, campus backbone, WAN applications, and industrial environment

Methods of deployment: empty plastic pipes, ducts and trays

3. Product Design

Cable core	Stranded loose tubes with up to 144 glass fibres, water-blocking reinforced glass yarns
Cable inner sheath	-
Cable outer sheath	Polyethylene (PE) outer sheath, halogen-free, UV and water-resistant
Colour of inner sheath	-
Colour of outer sheath	Black (RAL 9005)
Colour of loose tube	Active tubes: red, green, subsequent tubes are natural Filler: black
Identification of fibres	Red, green, blue, yellow, grey, violet, brown, orange, white, pink, black, turquoise
Type of armouring	Corrugated steel tape

AbN
automation

**HITRONIC® HVW Armoured
Outdoor Stranded Cable**
DB HVW3000_EN (version 3.0)
 valid from: 20.02.2014

4. Optical and Physical Properties of Cabled Fibre (and Bare Fibre)

Multimode fibre			50/125 μm	50/125 μm	50/125 μm	62.5/125 μm
			OM4	OM3	OM2	OM1
Attenuation	@ 850 nm	dB/km	≤ 3.5 (2.5)	≤ 3.5 (2.5)	≤ 3.5 (2.5)	≤ 3.5 (3.0)
	@ 1300 nm	dB/km	≤ 1.5 (0.7)	≤ 1.5 (0.7)	≤ 1.5 (0.7)	≤ 1.5 (0.7)
Bandwidth	@ 850 nm	MHz-km	≥ 3500	≥ 1500	≥ 500	≥ 200
	@ 1300 nm	MHz-km	≥ 500	≥ 500	≥ 500	≥ 500
Numerical aperture			0.2 ± 0.015	0.2 ± 0.015	0.2 ± 0.015	0.275 ± 0.015
Core diameter	μm		50 ± 2.0	50 ± 2.0	50 ± 2.0	62.5 ± 2.5
Cladding diameter	μm		125 ± 1.0	125 ± 1.0	125 ± 1.0	125 ± 2
Primary coating diameter	μm		242 ± 5	242 ± 5	242 ± 5	245 ± 10
Single-mode fibre			9/125 μm			
			(ITU-T G.652.D)			
Attenuation	@ 1310 nm	dB/km	≤ 0.4 (0.35)			
	@ 1550 nm	dB/km	≤ 0.4 (0.21)			
Chromatic dispersion	@ 1310 nm	ps/(nm-km)	≤ 3.0			
	@ 1550 nm	ps/(nm-km)	≤ 18			
Zero dispersion wavelength		Nm	1300 – 1322			
Cut-off wavelength		Nm	≤ 1260			
PMD		ps/km	≤ 0.1			
Mode field diameter		μm	9.0 ± 0.4			
Cladding diameter		μm	125 ± 1			
Primary coating diameter		μm	242 ± 7			

5. Thermal Properties

Operating temperature	-40°C to +70°C
Installation temperature	-5°C to +50°C
Storage temperature	-40°C to +70°C

6. Mechanical Properties

Max. number of fibres	144
Cable outer diameter (mm)	refer to Product Range Overview
Cable weight (kg/km)	refer to Product Range Overview
Min. bending radius (mm)	without tensile load 15 x D with tensile load 20 x D
Max. tensile strength (N)	long-term 3000 short-term 5000
Max. crush resistance (N)	3000

HITRONIC® HVW Armoured Outdoor Stranded Cable

DB HVW3000_EN (version 3.0)
valid from: 20.02.2014

7. Chemical Properties

PE sheath	Non-aging, halogen-free, good stability to acids and alkalis
-----------	--

8. EC Directives

Not applicable for fibre optic cables

9. Approvals

- RoHS
- Environmental and mechanical tests comply to EN 187000 and IEC 60794
- Halogen free according to IEC 60754-1

10. Product Range Overview

Article number	Article designation	Fibre type	No. of Fibres	Outer Ø (mm)	Weight (kg/km)
Multimode					
26900424	HITRONIC® HVW3000 2x12G 50/125 OM4	50/125 OM4	24	12.5	98
26900448	HITRONIC® HVW3000 4x12G 50/125 OM4	50/125 OM4	48	12.5	148
26900324	HITRONIC® HVW3000 2x12G 50/125 OM3	50/125 OM3	24	12.5	98
26900348	HITRONIC® HVW3000 4x12G 50/125 OM3	50/125 OM3	48	12.5	148
26900224	HITRONIC® HVW3000 2x12G 50/125 OM2	50/125 OM2	24	12.5	98
26900248	HITRONIC® HVW3000 4x12G 50/125 OM2	50/125 OM2	48	12.5	148
26900124	HITRONIC® HVW3000 2x12G 62.5/125 OM1	62.5/125 OM1	24	12.5	98
26900148	HITRONIC® HVW3000 4x12G 62.5/125 OM1	62.5/125 OM1	48	12.5	148
Single-mode					
26900924	HITRONIC® HVW3000 2x12E 9/125 OS2	9/125 OS2	24	12.5	98
26900936	HITRONIC® HVW3000 3x12E 9/125 OS2	9/125 OS2	36	12.5	148
26900948	HITRONIC® HVW3000 4x12E 9/125 OS2	9/125 OS2	48	12.5	148
26900972	HITRONIC® HVW3000 6x12E 9/125 OS2	9/125 OS2	72	16.0	215
26900996	HITRONIC® HVW3000 8x12E 9/125 OS2	9/125 OS2	96	16.0	222
26900944	HITRONIC® HVW3000 12x12E 9/125 OS2	9/125 OS2	144	18.5	261

AbN
automation