

HITRONIC® HUW1500 Armoured Universal Cable

DB_HUW1500_EN
(version 01)
valid from: 01.10.2019

1. Product Description

Cable designation: J/A-DQ(ZN)(SR)H or J/A-DQ(ZN)BWH


Universal glass fibre optic cable with corrugated steel tape armour, central loose tube, non-metallic strength elements, longitudinally and laterally watertight, excellent rodent protection, flame-retardant and halogen-free cable sheath

2. Application

For use in outdoor, indoor, campus backbone, WAN applications, and industrial environment

Methods of deployment: empty plastic pipes, ducts and trays

3. Product Design

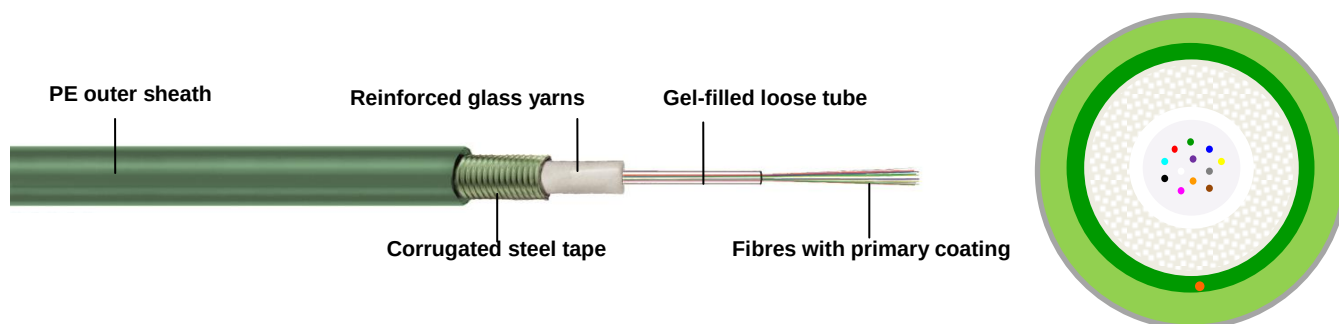

Cable core	- Single-tube design: central gel-filled loose tube with up to 24 glass fibres, water-blocking reinforced glass yarns - Multi-tubes design: up to 12 stranded loose tubes with a total of up to 144 glass fibres, a central element, water-blocking reinforced glass yarns
Cable inner sheath	-
Cable outer sheath	Thermoplastic LSZH outer sheath, flame-retardant, halogen-free, UV and water-resistant
Colour of inner sheath	-
Colour of outer sheath	Green
Colour of loose tube	- Single-tube design: natural - Multi-tubes design: red, green, subsequent tubes are natural, fillers are black
Identification of fibres	Red, green, blue, yellow, grey, violet, brown, orange, white, pink, black, turquoise
Type of armouring	Corrugated steel tape

AbN
automation

HITRONIC® HUW1500
Armoured Universal Cable
DB_HUW1500_EN
(version 01)
 valid from: 01.10.2019

4. Optical and Physical Properties of Cabled Fibre (and Bare Fibre)

Multimode fibre			50/125 µm	50/125 µm	50/125 µm	62.5/125 µm
			OM4	OM3	OM2	OM1
Attenuation	@ 850 nm	dB/km	≤ 3.5 (2.5)	≤ 3.5 (2.5)	≤ 3.5 (2.5)	≤ 3.5 (3.0)
	@ 1300 nm	dB/km	≤ 1.5 (0.7)	≤ 1.5 (0.7)	≤ 1.5 (0.7)	≤ 1.5 (0.7)
Bandwidth	@ 850 nm	MHz-km	≥ 3500	≥ 1500	≥ 500	≥ 200
	@ 1300 nm	MHz-km	≥ 500	≥ 500	≥ 500	≥ 500
Numerical aperture			0.2 ± 0.015	0.2 ± 0.015	0.2 ± 0.015	0.275 ± 0.015
Core diameter			µm	50 ± 2.0	50 ± 2.0	62.5 ± 2.5
Cladding diameter			µm	125 ± 1.0	125 ± 1.0	125 ± 2
Primary coating diameter			µm	242 ± 5	242 ± 5	245 ± 10
Single-mode fibre			9/125 µm			
			(ITU-T G.652.D)			
Attenuation	@ 1310 nm	dB/km	≤ 0.4 (0.35)			
	@ 1550 nm	dB/km	≤ 0.4 (0.21)			
Chromatic dispersion	@ 1310 nm	ps/(nm-km)	≤ 3.0			
	@ 1550 nm	ps/(nm-km)	≤ 18			
Zero dispersion wavelength			Nm			
Cut-off wavelength			Nm			
PMD			ps/km			
Mode field diameter			µm			
Cladding diameter			µm			
Primary coating diameter			µm			

5. Thermal Properties

Operating temperature	-30°C to +70°C
Installation temperature	0°C to +50°C
Storage temperature	-30°C to +70°C

6. Mechanical Properties

Max. number of fibres		Up to 24	48-144
Cable outer diameter (mm)		9.6	Refer to range overview
Cable weight (kg/km)		88	Refer to range overview
Min. bending radius (mm)	without tensile load	15 x D	15 x D
	with tensile load	20 x D	20 x D
Max. tensile strength (N)	long-term	1500	2000
	short-term	2700	3600
Max. crush resistance (N/dm)		2000	2500
Fire load (MJ/m)		1.78	

HITRONIC® HUW1500
Armoured Universal Cable
DB_HUW1500_EN
(version 01)
 valid from: 01.10.2019

7. Chemical Properties

Thermoplastic LSZH sheath

Flame-retardant, low smoke and halogen-free

8. EC Directives

Not applicable for fibre optic cables

9. Approvals

- RoHS
- Environmental and mechanical tests comply to EN 187000 and IEC 60794
- Fire resistance tested according to IEC 60332-1, IEC 60332-3
- Halogen free according to IEC 60754-1, and low smoke emission complies with IEC 61034-1/2

10. Product Range Overview

Article number	Article designation	Fibre type	No. of Fibres	Weight (kg/km)	Outer Ø (mm)
Multimode					
27500404	HITRONIC® HUW1500 4G 50/125 OM4	50/125 OM4	4	88	9.6
27500408	HITRONIC® HUW1500 8G 50/125 OM4	50/125 OM4	8	88	9.6
27500412	HITRONIC® HUW1500 12G 50/125 OM4	50/125 OM4	12	88	9.6
27500424	HITRONIC® HUW1500 24G 50/125 OM4	50/125 OM4	24	88	9.6
27500304	HITRONIC® HUW1500 4G 50/125 OM3	50/125 OM3	4	88	9.6
27500308	HITRONIC® HUW1500 8G 50/125 OM3	50/125 OM3	8	88	9.6
27500312	HITRONIC® HUW1500 12G 50/125 OM3	50/125 OM3	12	88	9.6
27500324	HITRONIC® HUW1500 24G 50/125 OM3	50/125 OM3	24	88	9.6
27500202	HITRONIC® HUW1500 2G 50/125 OM2	50/125 OM2	2	88	9.6
27500204	HITRONIC® HUW1500 4G 50/125 OM2	50/125 OM2	4	88	9.6
27500208	HITRONIC® HUW1500 8G 50/125 OM2	50/125 OM2	8	88	9.6
27500212	HITRONIC® HUW1500 12G 50/125 OM2	50/125 OM2	12	88	9.6
27500224	HITRONIC® HUW1500 24G 50/125 OM2	50/125 OM2	24	88	9.6
27500104	HITRONIC® HUW1500 4G 62.5/125 OM1	62.5/125 OM1	4	88	9.6
27500108	HITRONIC® HUW1500 8G 62.5/125 OM1	62.5/125 OM1	8	88	9.6
27500112	HITRONIC® HUW1500 12G 62.5/125 OM1	62.5/125 OM1	12	88	9.6
27500124	HITRONIC® HUW1500 24G 62.5/125 OM1	62.5/125 OM1	24	88	9.6
Single-mode					
27500904	HITRONIC® HUW1500 4 E 9/125 OS2	9/125 OS2	4	88	9.6
27500908	HITRONIC® HUW1500 8 E 9/125 OS2	9/125 OS2	8	88	9.6
27500912	HITRONIC® HUW1500 12 E 9/125 OS2	9/125 OS2	12	88	9.6
27500924	HITRONIC® HUW1500 24 E 9/125 OS2	9/125 OS2	24	88	9.6
26500948	HITRONIC® HUW1500 4x12 E 9/125 OS2	9/125 OS2	48	178	12.5