

381166827	<b>DATA SHEET</b>	
Valid from: 31.07.2025	<b>EPIC® H-BE 006 MS</b>	

**Description**

- Standard inserts with screw termination,
- The EPIC® H-BE series is suitable for applications that require a reliable connection when working with high voltages and currents



Images may vary

**General Characteristics**

Series	H-BE 6
Version	Male
Design Size	6B
Number of Contacts	6 + PE
Wire Protection	Yes
Termination Methods	Screw termination: 0,75 – 2,5 mm <sup>2</sup> /AWG 18-14
Temperature Range	-40°C up to +125°C

**Mechanical Characteristics**

Cycle of mechanical operation	≥ 500
Tightening torque contact screw	0.5 Nm
Stripping length	7.0 mm

**Electrical Characteristics**

Rated Voltage, IEC	500 V
Rated Voltage, UL	600 V
Rated Voltage, CSA	600 V
Rated Impulse Voltage	6 kV
Rated Current, IEC	16 A
Rated Current, UL	16 A
Rated Current, CSA	16 A
Contact Resistance	≤ 1 mΩ
Pollution degree	3

**Materials and Surfaces**

Contacts	Copper alloy, hard-silver plated
Insulating Body	PC
Flammability Class according to UL 94	V-0

**Certifications**

UL- Certification, E-File-Number	E75770
----------------------------------	--------

**Standard**


Safety Standard	IEC 61984, IEC 60664-1 UL 1977 CSA 22.2 182.3
-----------------	---

AbN  
automation


Creator: TODV1/BU EPIC Released: THBO1/BU EPIC	Document: DB381166827EN Version: 01	Page 1 of 3
---	--	-------------

381166827	<b>DATA SHEET</b>	
Valid from: 31.07.2025	<b>EPIC® H-BE 006 MS</b>	

**Technical Drawings**

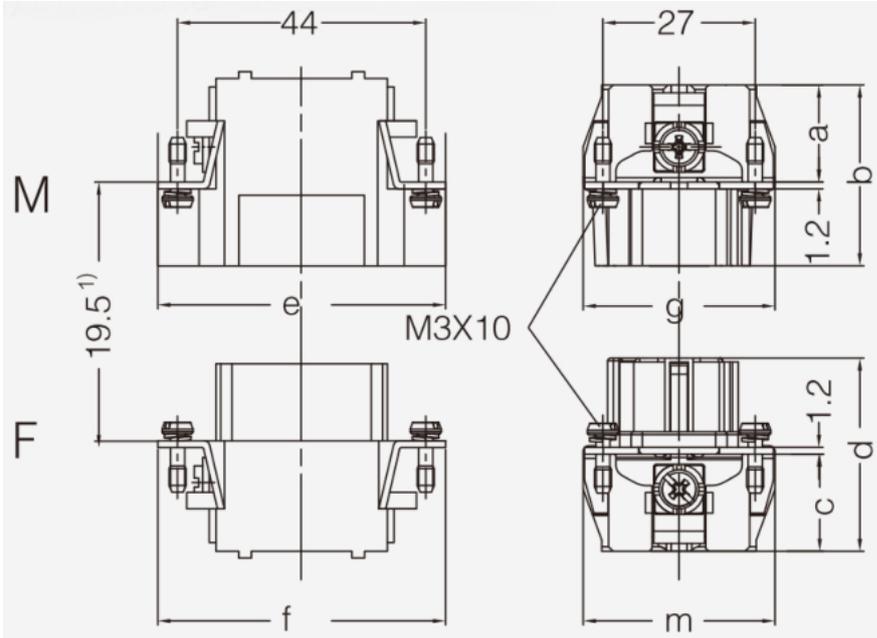

	a	b	e	g	c	d	f	m
[mm]	16	32.4	51	34	16.8	34.8	51	34

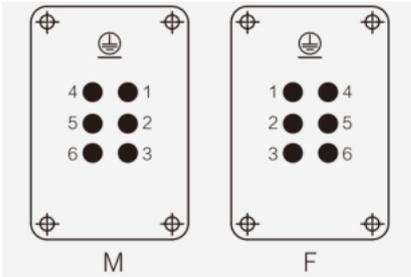

Pin assignment

381166827	<b>DATA SHEET</b>	
Valid from: 31.07.2025	<b>EPIC® H-BE 006 MS</b>	



Robust



Temperature-resistant

**Info**

Multifunctional insert for versatile applications

**Application range**

- Mechanical engineering
- Light & sound technology
- Plastics industry

**Remark**

Photographs are not to scale and do not represent detailed images of the respective products.

AbN  
automation

Creator: TODV1/BU EPIC Released: THB01/BU EPIC	Document: DB381166827EN Version: 01	Page 3 of 3
---	--	-------------