

381167225	<b>DATA SHEET</b>	
Valid from: 20.03.2025	<b>EPIC® H-A 004 MS</b>	

## Description

- H-A inserts with screw termination up to 2.5 mm<sup>2</sup> wire cross section.
- The small H-A 4 are used whenever there is minimal space.
- Easy to service screw connection.
- Easy cable connection with strait cable entry in the contacts.



Images may vary

## General Characteristics

Series	H-A 4
Version	Male
Design Size	3A
Number of Contacts	4 + PE
Wire Protection	No
Termination Methods	Screw termination: 1.0 - 2.5 mm <sup>2</sup> /AWG 18-14
Temperature Range	-40°C up to +125°C

## Mechanical Characteristics

Cycle of mechanical operation	≥ 500
Tightening torque contact screw	0.25Nm

## Electrical Characteristics

Rated voltage conductor-earth, IEC	230 V
Rated voltage conductor-conductor; IEC	400 V
Rated Voltage, UL	600 V
Rated Voltage, CSA	600 V
Rated Impulse Voltage	4 kV
Rated Current, IEC	10 A
Rated Current, UL	10 A
Rated Current, CSA	10 A
Contact Resistance	≤ 1 mΩ
Pollution degree	3

## Materials and Surfaces

Contacts	Copper alloy, hard-silver plated
Insulating Body	PC
Flammability Class according to UL 94	V-0

## Certifications

UL- Certification, E-File-Number	E75770
----------------------------------	--------

## Standard



Safety Standard	IEC 61984, IEC 60664-1 UL 1977 CSA 22.2 182.3
-----------------	-----------------------------------------------------

AbN  
automation

Creator: JOST1/BU EPIC	Document: DB381167225EN	Page 1 of 2
Released: THBO1/BU EPIC	Version: 00	

381167225	<b>DATA SHEET</b>	
Valid from: 20.03.2025	EPIC® H-A 004 MS	

**Technical Drawings**

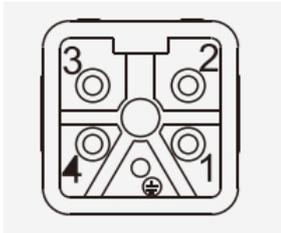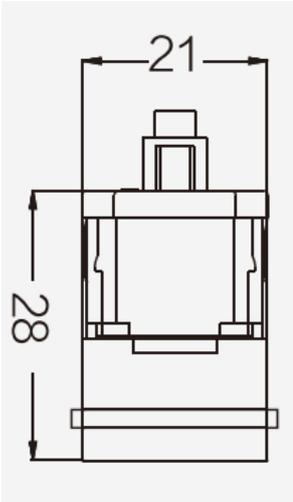

Pin assignment



Industrial machinery and plant engineering



Assembly time



Space Requirement

**Info**

Robust power supply connector  
Straight cable entry into the contacts

**Application range**

Machine and equipment manufacturings

**Remark**

Photographs are not to scale and do not represent detailed images of the respective products.

Creator: JOST1/BU EPIC Released: THBO1/BU EPIC	Document: DB381167225EN Version: 00	Page 2 of 2
---------------------------------------------------	----------------------------------------	-------------