

381167247	DATA SHEET	
Valid from: 06.06.2025	EPIC® H-EEE 064 MC	

Description

- H-EEE inserts with high contact density based on the proven H-BE series
- The H-EEE inserts with machined contacts for a high number of pins in very tight spaces.
- For assembly in H-B housing



Images may vary

General Characteristics

Series	H-EEE 64
Version	Male
Design Size	24B
Number of Contacts	64 + PE
Termination Methods	Crimp termination: 0.14–4.0 mm ² /AWG 26-12
Temperature Range	-40°C up to +125°C

Mechanical Characteristics

Cycle of mechanical operation	≥ 500
Stripping length	7.5 mm

Electrical Characteristics

Rated Voltage, IEC	500 V
Rated Voltage, UL	600 V
Rated Impulse Voltage	6 kV
Rated Current, IEC	16 A
Contact Resistance	≤ 1 mΩ
Pollution degree	3

Materials and Surfaces

Contacts	Copper alloy, hard-silver plated
Insulating Body	PC
Flammability Class according to UL 94	V-0

Standard



Safety Standard	IEC 61984, IEC 60664-1
-----------------	------------------------

AbN
automation

Creator: TODV1/BU EPIC	Document: DB381167247EN	Page 1 of 3
Released: THB01/BU EPIC	Version: 01	

381167247	DATA SHEET	
Valid from: 06.06.2025	EPIC® H-EEE 064 MC	

Technical Drawings

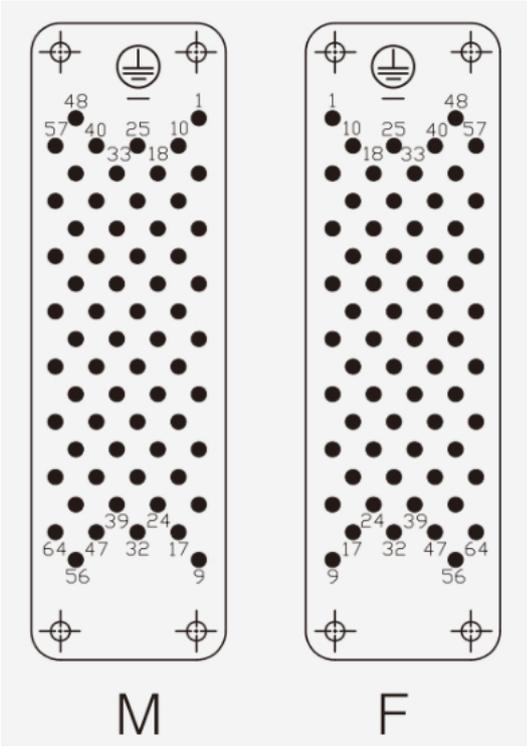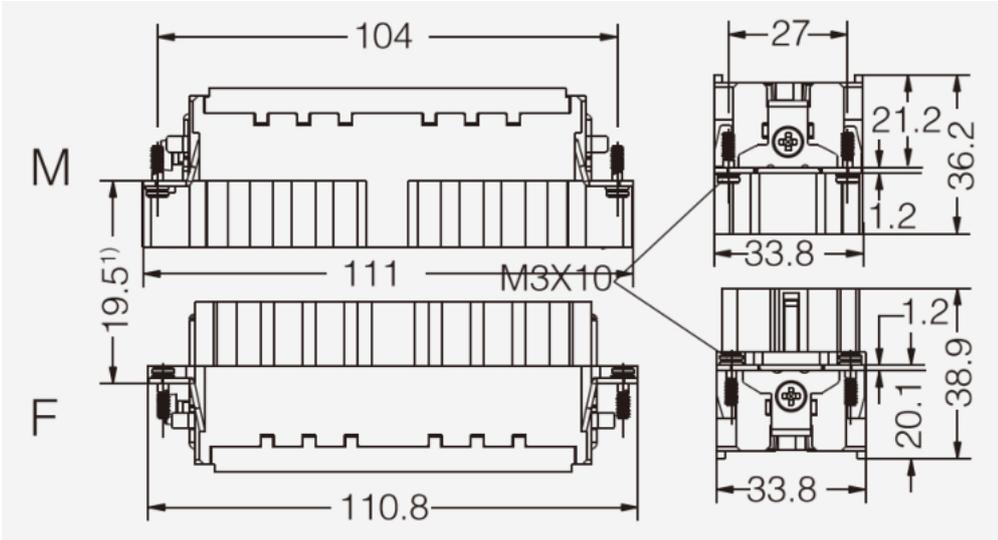

Pin assignment

We reserve all rights according to DIN ISO 16016.
 PD 0019/05_04.18EN

381167247	DATA SHEET	
Valid from: 06.06.2025	EPIC® H-EEE 064 MC	



Industrial machinery and plant engineering



Temperature-resistant

Info

Inserts with high contact density for medium power

Application range

Mechanical engineering
Plant engineering

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

AbN
automation

Creator: TODV1/BU EPIC	Document: DB381167247EN	Page 3 of 3
Released: THB01/BU EPIC	Version: 01	