


381167291	DATA SHEET	
Valid from: 10.07.2025	EPIC® H-K 012/2 MC	

Description

- 12 + 2 Pin inserts for harnessing
- Suitable for the general machineryand plant engineering, renewable energy and plastic industry
- 12 power contacts
2 Signal contacts

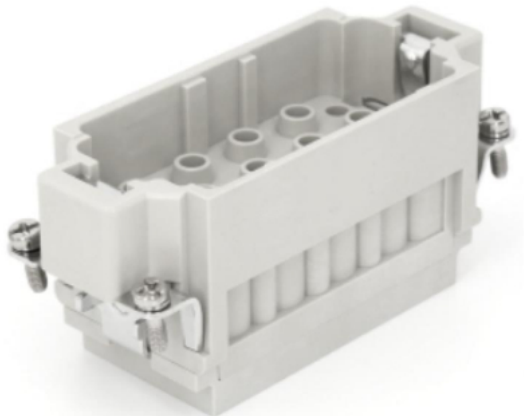

Images may vary

General Characteristics

Series	H-K 12/2
Version	Male
Design Size	16B
Number of Contacts	14 + PE
Number of Power Contacts	12
Number of Signal Contacts	2
Termination Method	Crimp termination
Power Conductor Cross-Section	1.5 – 6 mm²/AWG 16-10
Signal Conductor Cross-Section	0.14 – 2.5 mm²/AWG 26-14
Temperature Range	-40°C up to +125°C

Mechanical Characteristics

Cycle of mechanical operation	≥ 500
-------------------------------	-------

Electrical Characteristics

Rated voltage Power, IEC	690 V
Rated Impulse Voltage Power	8 kV
Rated Current Power, IEC	40 A
Contact Resistance Power	≤ 0,3 mΩ
Rated voltage Signal, IEC	250 V
Rated Impulse Voltage Signal	4 kV
Rated Current Signal, IEC	10 A
Contact Resistance Signal	≤ 3 mΩ
Pollution degree Power/Signal	3

Materials and Surfaces

Contacts	Copper alloy, hard-silver plated
Insulating Body	PC
Flammability Class according to UL 94	V-0

AbN
automation

Creator: TODV1/BU EPIC	Document: DB381167291EN	Page 1 of 3
Released: THB01/BU EPIC	Version: 00	



381167291	DATA SHEET	
Valid from: 10.07.2025	EPIC® H-K 012/2 MC	

Standard

Safety Standard

IEC 61984, IEC 60664-1

Technical Drawings

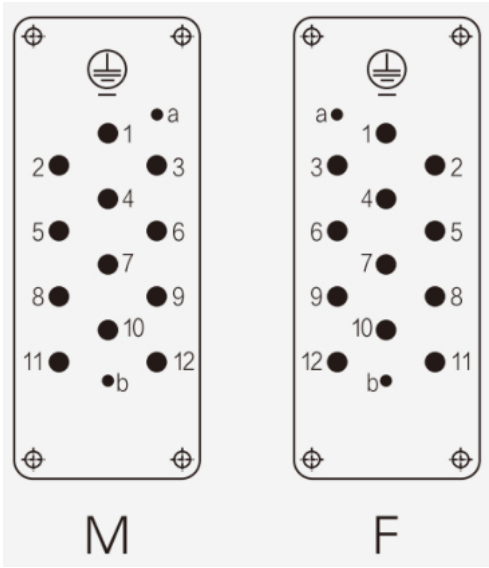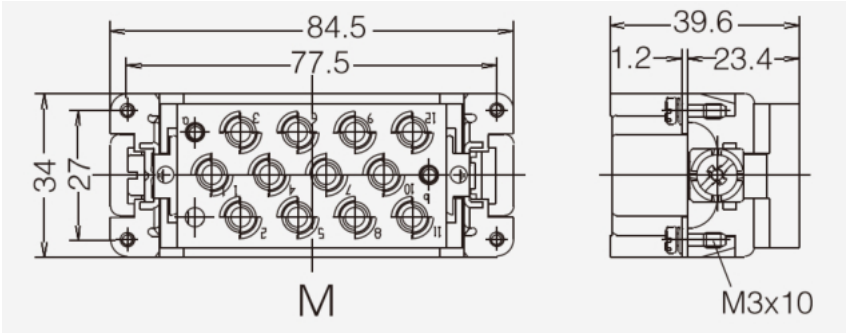

Pin assignment

381167291	DATA SHEET	
Valid from: 10.07.2025	EPIC® H-K 012/2 MC	



Industrial machinery and plant engineering



Temperature-resistant



Robust

Info

Combination Insert Power/Signal

Application range

Machine building, Mechanical engineering, renewable energy, plastic industry

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

AbN
automation

Creator: TODV1/BU EPIC Released: THBO1/BU EPIC	Document: DB381167291EN Version: 00	Page 3 of 3
---	--	-------------