

381167293	<b>DATA SHEET</b>	
Valid from: 04.02.2026	<b>EPIC® H-K 006/6 MAS</b>	

**Description**

- 6 + 6 Pin inserts for harnessing
- Suitable for the general machinery and plant engineering, renewable energy and plastic industry
- 6 power contacts  
6 Signal contacts



Images may vary

**General Characteristics**

Series	H-K 6/6
Version	Male
Design Size	24B
Number of Contacts	12 + PE
Number of Power Contacts	6
Number of Signal Contacts	6
Termination Method	Axial screw termination / Screw termination
Power Conductor Cross-Section	16 – 35 mm <sup>2</sup> /AWG 5-2
Signal Conductor Cross-Section	0.22 – 2.5 mm <sup>2</sup> /AWG 24-14
Temperature Range	-40°C up to +125°C

**Mechanical Characteristics**

Cycle of mechanical operation	≥ 500
Tightening torque power contact screw	6 Nm @ 16 mm <sup>2</sup> 7 Nm @ 25 mm <sup>2</sup> 8 Nm @ 35 mm <sup>2</sup>
Tightening torque signal contact screw	0.8 Nm
Stripping length power contact	13-14 mm
Stripping length signal contact	7.5 mm

**Electrical Characteristics**

Rated voltage Power, IEC	690 V
Rated Impulse Voltage Power	8 kV
Rated Current Power, IEC	100 A
Contact Resistance Power	≤ 0,5 mΩ
Rated voltage Signal, IEC	400 V
Rated Impulse Voltage Signal	6 kV
Rated Current Signal, IEC	16 A
Contact Resistance Signal	≤ 3 mΩ
Pollution degree Power/Signal	3

AbN  
automation

Creator: THB01/BU EPIC	Document: DB381167293EN	Page 1 of 3
Released: JUKL2/BU EPIC	Version: 01	

381167293	<b>DATA SHEET</b>	
Valid from: 04.02.2026	<b>EPIC® H-K 006/6 MAS</b>	

**Materials and Surfaces**

Contacts	Copper alloy, hard-silver plated
Insulating Body	PC
Flammability Class according to UL 94	V-0



**Standard**

Safety Standard	IEC 61984, IEC 60664-1
-----------------	------------------------

**Approvals**

UL-Approval, E-File-Number	E75770
----------------------------	--------

**Technical Drawings**

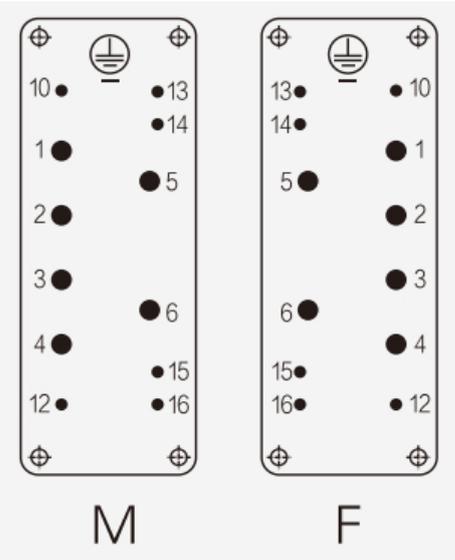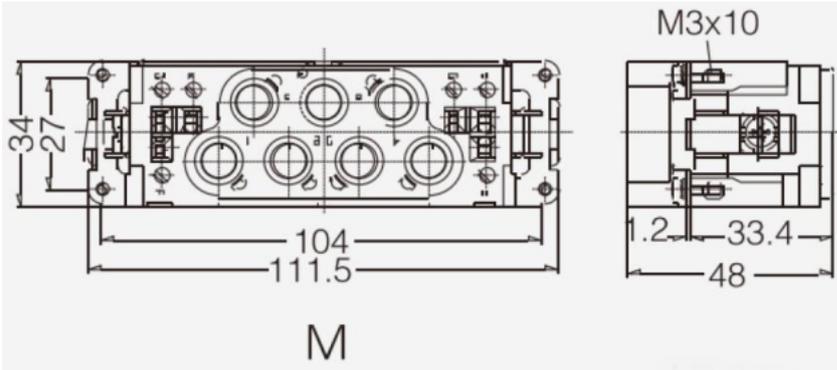

Pin assignment

381167293	<b>DATA SHEET</b>	
Valid from: 04.02.2026	EPIC® H-K 006/6 MAS	



Industrial machinery and plant engineering



Temperature-resistant



Robust

**Info**

Combination Insert Power/Signal

**Application range**

Machine building, Mechanical engineering, renewable energy, plastic industry

**Remark**

Photographs are not to scale and do not represent detailed images of the respective products.

AbN  
automation

Creator: THB01/BU EPIC	Document: DB381167293EN	Page 3 of 3
Released: JUKL2/BU EPIC	Version: 01	