

44420024

DATA SHEETValid from:
28.07.2021**EPIC® SIGNAL M23 B1****Description**

- Circular connectors for servo cables and encoders
- Defined stop position when mounting at device prevents uncontrolled pressing of sealing
- Harnessed insulation body can easily inserted from back side in already mounted housing

**General characteristics**

Series	SIGNAL M23
Version	panel-mount box, rear wall mounting
Protection rating	IP 68 (10 h / 1 m)
Temperature range	-25 °C to +125 °C

Product variations

Article number	Coding	Fastening type	PU
44420024	black (N)	M2,5 (4x)	5
44420023	black (N)	M2,5 (4x)	20
44420026	red (+20°)	M2,5 (4x)	5
44420025	red (+20°)	M2,5 (4x)	20
44420022	blue (-20°)	M2,5 (4x)	5
44420021	blue (-20°)	M2,5 (4x)	20

Materials and surfaces

Housing	Zinc die-casting, nickel plated
Sealing	FPM

Approvals


VDE-Approval, VDE-REG.-Nr.	C024
UL File Number	E249137

Standard


Safety Standard	IEC 61984; UL2238; CSA 22.2 182.3
-----------------	-----------------------------------

AbN
automation

Drawings

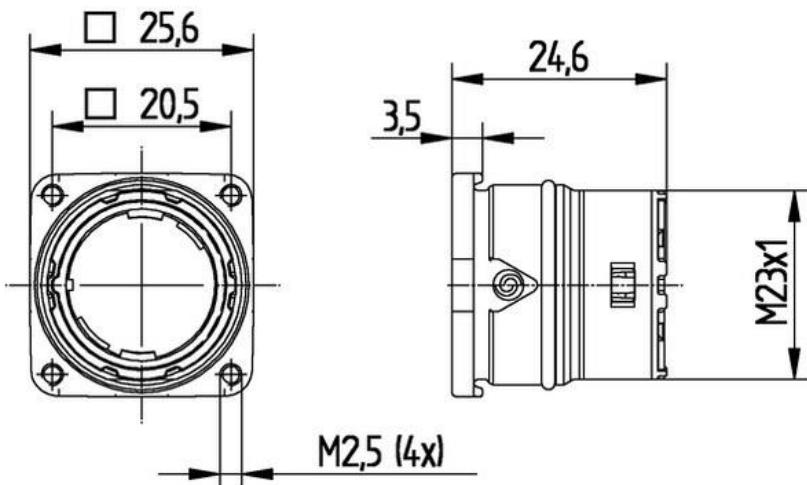

Coding

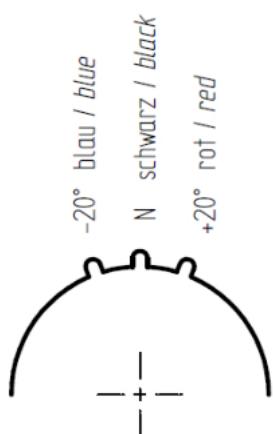

B1

Ansicht steckseitig

View from mating side



44420024

DATA SHEET

Valid from:
28.07.2021


EPIC® SIGNAL M23 B1



LAPP



Good chemical resistance



Industrial machinery and plant engineering



Robust



Wind energy

Info

Housing for mounting at inner side to save space outside of device

Application range

Plant engineering

Servo drives and Servo assemblies

Measurement and control technology

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

AbN
automation

Creator: MANA2/PDP
Released: IVSE1/PDP

Document: DB44420024EN
Version: 03

Page 3 of 3