

44429316	<b>DATA SHEET</b>	
Valid from: 17.09.2018	<b>EPIC® LS1.5 A6</b>	

## Description

- Circular connectors for servomotors and power supply
- More power for servo motors
- With the proven vibrationsafe contacts
- EMC version for cables with large cross-sections



## General Characteristics

Series	LS 1.5
Version	for female contacts
Pin configuration	3+PE+2 / 3+PE+4
Rated voltage (V)	630 V (3,6mm Contacts) 250 V (2mm Contacts)
Rated impulse voltage	6 kV (3,6mm Contacts) 4 kV (2mm Contacts)
Rated current (A)	70 A (3.6-mm contacts) at 25 °C 30 A (2-mm contacts) at 25 °C
Contacts	Gold plated brass
Number of contacts	3+PE+2 / 3+PE+4
Termination methods	Crimp termination: 0.75 - 10 mm <sup>2</sup> (3.6 mm contacts) Crimp termination: 0.14 - 4.0 mm <sup>2</sup> (2 mm contacts)
Protection	IP 67
Cycle of mechanical operation	50
Temperature range	-20°C to +125°C
Degree of soiling	3

## Product Variations

Article- Number	Article	Fastening type	Pin configuration
<b>Type LS1.5 A6 for female contacts</b>			
44429316	EPIC® LS1.5 A6	Ø4,2mm (4x)	3+PE+2
44429317	EPIC® LS1.5 A6	Ø4,2mm (4x)	3+PE+4

## Materials and Surfaces


Housing	Nickel-plated zinc die-casting, nickel-plated brass
Insert	PA
Seal	FPM

AbN  
automation

Creator: MANA2/PDP Released: IVSE1/PDP	Document: DB44429316EN Version: 01	Page 1 of 2
---	---------------------------------------	-------------

44429316	<b>DATA SHEET</b>	
Valid from: 17.09.2018	<b>EPIC® LS1.5 A6</b>	

## Technical Drawings

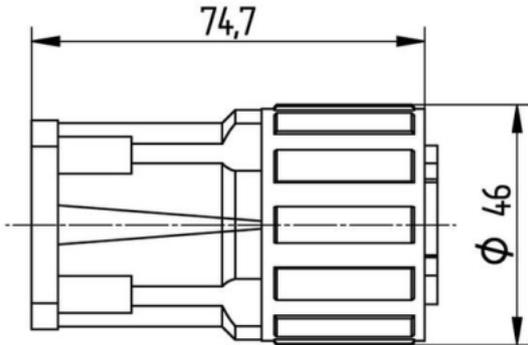


Wide clamping range



Industrial machinery and plant engineering



Mechanical resistance



Optimum strain relief



Robust



Waterproof

## Application range

Plant engineering

Servo drives and servo assemblies

## Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Creator: MANA2/PDP Released: IVSE1/PDP	Document: DB44429316EN Version: 01	Page 2 of 2
---	---------------------------------------	-------------