

5200 3130	DATA SHEET	
Valid from: 08.05.2018	SILVYN® SCH	

The SILVYN® SCH is a multi-range hose clamp, with worm drive.
The hose clamp is suitable for applications with higher mechanical stress.



Material:

Body	Stainless steel, blanc
Screw	Steel, zinc plated
Band	Stainless steel, blanc

Technical Features:

Screw	Worm drive with cross recess and width across flats 7
Clamping range	10 up to 60mm

Additional features:

Resistant to corrosion

Reference standards:

DIN 3017-1

Suitable conduit gland:

SILVYN® SSV
SILVYN® SSV-M
SILVYN® SSVZ
SILVYN® SSVZ-M

Suitable conduits:

SILVYN® SI
SILVYN® SP
SILVYN® SP-PU


AbN
automation

For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

Creator: MAU1/PDP Released: DAMU1/PDP	Document: DB52003130EN Version: 01	Page 1 of 2
--	---------------------------------------	-------------

5200 3130	DATA SHEET	
Valid from: 08.05.2018	SILVYN® SCH	

Product drawing:

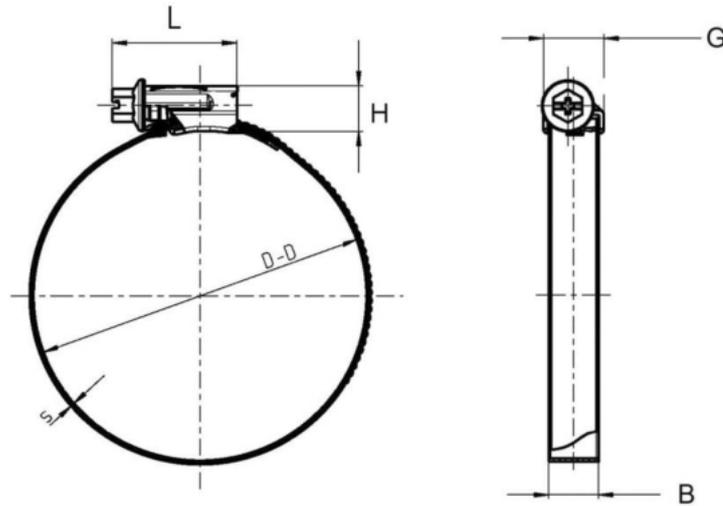

Dimension table:

Part No.	Clamping range D-D mm	Belt thickness S mm	Belt range B mm	Body length L mm	Body high H mm	Body width G mm
5200 3130	10 - 16	0,6	7,5	17,0	9,0	11,5
5200 3140	12 - 20	0,65	9,0	24,0	11,0	13,0
5200 3160	16 - 25	0,65	9,0	24,0	11,0	13,0
5200 3170	20 - 32	0,65	9,0	24,0	11,0	13,0
5200 9050	25 - 40	0,65	9,0	26,0	11,0	13,0
5200 9061	35 - 50	0,8	12,0	30,0	11,0	14,6
5200 9040	40 - 60	0,8	12,0	30,0	11,0	14,6