

52104730	DATA SHEET	
Valid from: 06.02.2025	SKINDICHT® TWIST-M	

The SKINDICHT® TWIST-M is a 360° swivel coupler, which is made of nickel plated brass, for using with metric SILVYN® conduit glands.
The coupler is suitable for the positioning of elbowed fitting and the prevention of damage by torsional motion on rigid protection conduit systems.



Material:

Body	Brass, nickel plated
Snap ring	Spring steel
Sealing	FKM

Technical Features:


Connecting thread	M12x1,5 up to M25x1,5 acc. to DIN EN 60423
Protection class coupler	IP66 acc. to DIN EN 60529 IP68 – 5bar / 30min acc. to DIN EN 60529 Depending on the used SILVYN® protection conduit system
Temperature range	-20°C up to +200°C

Norm references:



Notes:

The coupler is no substitution for ball- or roller bearings!

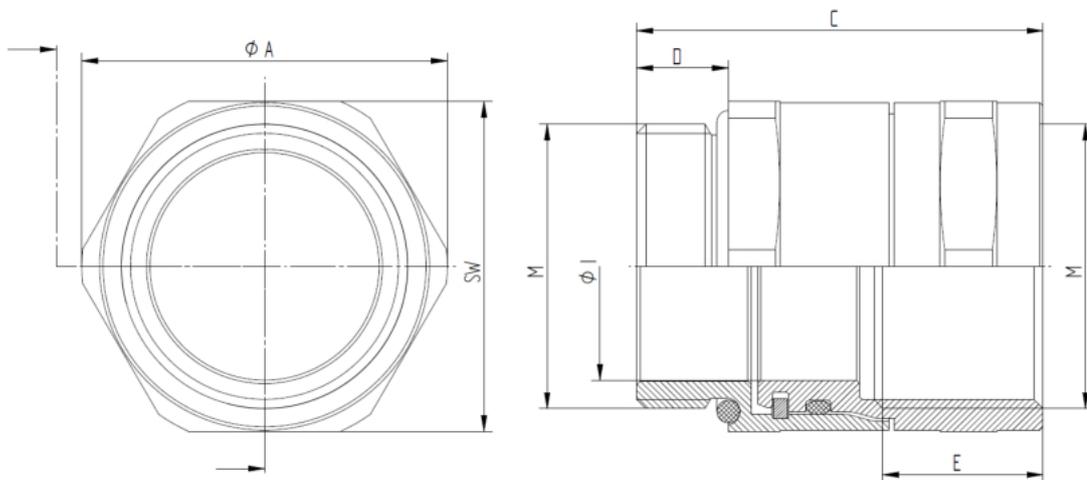

Dimension table:

Part No.	Thread M	Wrench size SW	Thread length mm		Diameter mm		Length mm C
			D	E	Ø A	Ø I	
52104730	M12 x 1,5	16	6,5	12,5	17,6	8,0	29,0
52104731	M16 x 1,5	20	7,0	13,0	22,0	11,0	30,5
52104732	M20 x 1,5	24	8,0	14,5	26,4	14,5	34,5
52104733	M25 x 1,5	29	8,0	14,5	31,9	20,0	35,5

AbN
automation

For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

Creator: MAU1/PDP Released: DAMU1/PDP	Document: DB52104730EN Version: 04	Page 1 of 1
--	---------------------------------------	-------------